

# LM237, LM337 3-TERMINAL ADJUSTABLE REGULATORS

SLVS047D – NOVEMBER 1981 – REVISED MAY 2002

- Output Voltage Range Adjustable From  $-1.2\text{ V}$  to  $-37\text{ V}$
- Output Current Capability of  $1.5\text{ A}$  Max
- Input Regulation Typically  $0.01\%$  Per Input-Voltage Change
- Output Regulation Typically  $0.3\%$
- Peak Output Current Constant Over Temperature Range of Regulator
- Ripple Rejection Typically  $77\text{ dB}$
- Direct Replacement for National Semiconductor LM237 and LM337


## description

The LM237 and LM337 are adjustable 3-terminal negative-voltage regulators capable of supplying in excess of  $-1.5\text{ A}$  over an output voltage range of  $-1.2\text{ V}$  to  $-37\text{ V}$ . They are exceptionally easy to use, requiring only two external resistors to set the output voltage and one output capacitor for frequency compensation. The current design has been optimized for excellent regulation and low thermal transients. In addition, the LM237 and LM337 feature internal current limiting, thermal shutdown, and safe-area compensation, making them virtually immune to failure by overloads.

The LM237 and LM337 serve a wide variety of applications, including local on-card regulation, programmable output-voltage regulation, and precision current regulation.


The LM237 is characterized for operation over the virtual junction temperature range of  $-25^{\circ}\text{C}$  to  $150^{\circ}\text{C}$ . The LM337 is characterized for operation over the virtual junction temperature range of  $0^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ .

KC PACKAGE  
(TOP VIEW)




The INPUT terminal is in electrical contact with the mounting base.


TO-220AB



KTE PACKAGE  
(TOP VIEW)

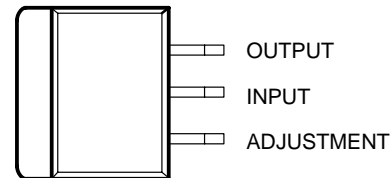

The INPUT terminal is in electrical contact with the mounting base.



AVAILABLE OPTIONS

| $T_J$  | PACKAGED DEVICES       |                              |
|--|------------------------|------------------------------|
|  | HEAT-SINK MOUNTED (KC) | PLASTIC FLANGE MOUNTED (KTE) |
| $-25^{\circ}\text{C}$ to $150^{\circ}\text{C}$ | LM237KC                | —                            |
| $0^{\circ}\text{C}$ to $125^{\circ}\text{C}$   | LM337KC                | LM337KTE                     |

The KTE package is only available taped and reeled. Add the R suffix to the device type (e.g., LM337KTER).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


Copyright © 2002, Texas Instruments Incorporated

# LM237, LM337

## 3-TERMINAL ADJUSTABLE REGULATORS

SLVS047D – NOVEMBER 1981 – REVISED MAY 2002

### schematic diagram

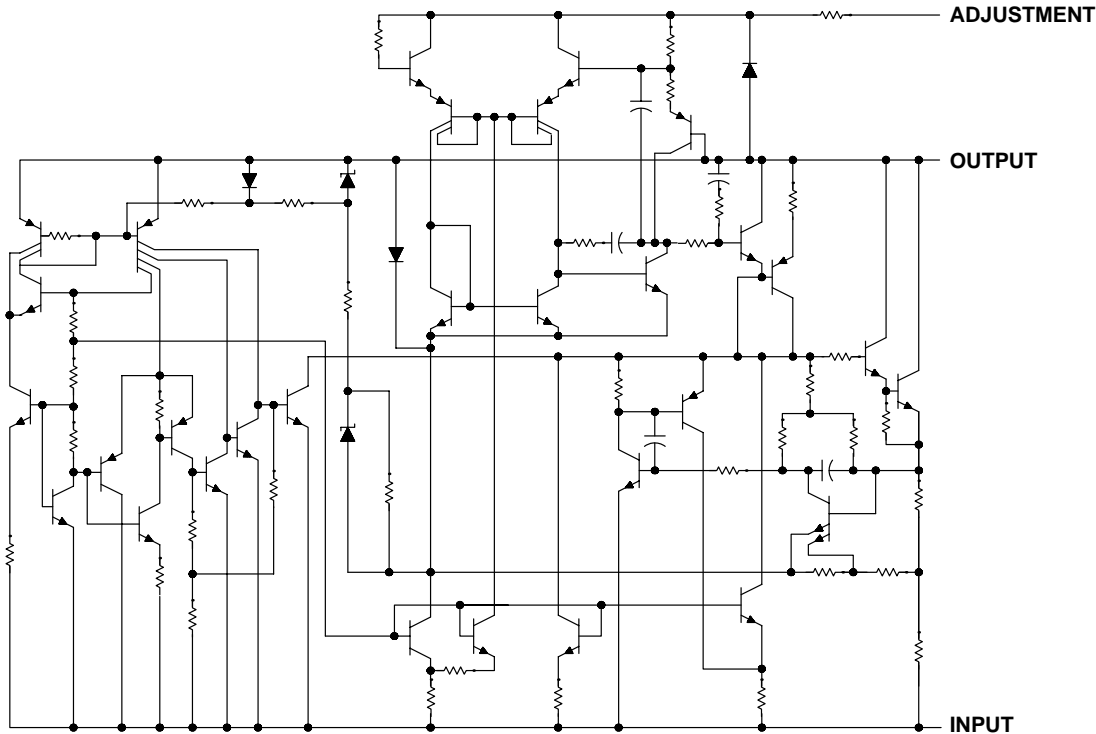

### absolute maximum ratings over operating temperature ranges (unless otherwise noted)<sup>†</sup>

|  |                |
|--|----------------|
| Input-to-output differential voltage, $V_I - V_O$                        | –40 V          |
| Package thermal impedance, $\theta_{JA}$ (see Notes 1 and 2): KC package | 22°C/W         |
| (see Notes 1 and 3): KTE package   | 23°C/W         |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds             | 260°C          |
| Storage temperature range, $T_{stg}$                                     | –65°C to 150°C |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. Maximum power dissipation is a function of  $T_J(max)$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = (T_J(max) - T_A)/\theta_{JA}$ . Operating at the absolute maximum  $T_J$  of 150°C can affect reliability. Due to variations in individual device electrical characteristics and thermal resistance, the built-in thermal overload protection may be activated at power levels slightly above or below the rated dissipation.
2. The package thermal impedance is calculated in accordance with JESD 51-7.
3. The package thermal impedance is calculated in accordance with JESD 51-5.

### recommended operating conditions

|                |  |  |  | MIN | MAX  | UNIT |
|----------------|--|--|--|-----|------|------|
| I <sub>O</sub> | Output current                         | V <sub>I</sub> – V <sub>O</sub>   ≤ 40 V, P ≤ 15 W |  | 10  | 1500 | mA   |
|                |  | V <sub>I</sub> – V <sub>O</sub>   ≤ 10 V, P ≤ 15 W |  | 6   | 1500 |      |
| T <sub>J</sub> | Operating virtual junction temperature | LM237  |  | –25 | 150  | °C   |
|                |  | LM337  |  | 0   | 125  |      |

# LM237, LM337

## 3-TERMINAL ADJUSTABLE REGULATORS

SLVS047D – NOVEMBER 1981 – REVISED MAY 2002

**electrical characteristics over recommended ranges of operating virtual junction temperature (unless otherwise noted)**

| PARAMETER                                     | TEST CONDITIONS†   |                           | LM237  |        |        | LM337  |        |        | UNIT          |
|---|--|---------------------------|--------|--------|--------|--------|--------|--------|---------------|
|   |  |                           | MIN    | TYP    | MAX    | MIN    | TYP    | MAX    |               |
| Input regulation‡                             | $V_I - V_O = -3\text{ V to } -40\text{ V}$   | $T_J = 25^\circ\text{C}$  |        | 0.01   | 0.02   |        | 0.01   | 0.04   | % / V         |
|   |  | $T_J = \text{MIN to MAX}$ |        | 0.02   | 0.05   |        | 0.02   | 0.07   |               |
| Ripple rejection                              | $V_O = -10\text{ V}, f = 120\text{ Hz}$  |                           |        | 60     |        |        | 60     |        | dB            |
|   | $V_O = -10\text{ V}, f = 120\text{ Hz}, C_{\text{ADJ}} = 10\text{ }\mu\text{F}$                                  |                           | 66     | 77     |        | 66     | 77     |        |               |
| Output regulation                             | $I_O = 10\text{ mA to } 1.5\text{ A}, T_J = 25^\circ\text{C}$  | $ V_O  \leq 5\text{ V}$   |        |        | 25     |        |        | 50     | mV            |
|   |  | $ V_O  \geq 5\text{ V}$   |        | 0.3%   | 0.5%   |        | 0.3%   | 1%     |               |
|   | $I_O = 10\text{ mA to } 1.5\text{ A}$  | $ V_O  \leq 5\text{ V}$   |        |        | 50     |        |        | 70     | mV            |
|   |  | $ V_O  \geq 5\text{ V}$   |        |        | 1%     |        |        | 1.5%   |               |
| Output-voltage change with temperature        | $T_J = \text{MIN to MAX}$  |                           |        | 0.6%   |        |        | 0.6%   |        |               |
| Output-voltage long-term drift                | After 1000 h at $T_J = \text{MAX}$ and $V_I - V_O = -40\text{ V}$  |                           |        | 0.3%   | 1%     |        | 0.3%   | 1%     |               |
| Output noise voltage                          | $f = 10\text{ Hz to } 10\text{ kHz}, T_J = 25^\circ\text{C}$   |                           |        | 0.003% |        |        | 0.003% |        |               |
| Minimum output current to maintain regulation | $ V_I - V_O  \leq 40\text{ V}$   |                           |        | 2.5    | 5      |        | 2.5    | 10     | mA            |
|   | $ V_I - V_O  \leq 10\text{ V}$   |                           |        | 1.2    | 3      |        | 1.5    | 6      |               |
| Peak output current                           | $ V_I - V_O  \leq 15\text{ V}$   |                           | 1.5    | 2.2    |        | 1.5    | 2.2    |        | A             |
|   | $ V_I - V_O  \leq 40\text{ V}, T_J = 25^\circ\text{C}$   |                           | 0.24   | 0.4    |        | 0.15   | 0.4    |        |               |
| Adjustment-terminal current                   |  |                           |        | 65     | 100    |        | 65     | 100    | $\mu\text{A}$ |
| Change in adjustment-terminal current         | $V_I - V_O = -2.5\text{ V to } -40\text{ V}, T_J = 25^\circ\text{C}, I_O = 10\text{ mA to MAX}$                  |                           |        | 2      | 5      |        | 2      | 5      | $\mu\text{A}$ |
| Reference voltage (output to ADJ)             | $V_I - V_O = -3\text{ V to } -40\text{ V}, I_O = 10\text{ mA to } 1.5\text{ A}, P \leq \text{rated dissipation}$ | $T_J = 25^\circ\text{C}$  | -1.225 | -1.25  | -1.275 | -1.213 | -1.25  | -1.287 | V             |
|   |  | $T_J = \text{MIN to MAX}$ | -1.2   | -1.25  | -1.3   | -1.2   | -1.25  | -1.3   |               |
| Thermal regulation                            | Initial $T_J = 25^\circ\text{C}$ , 10-ms pulse   |                           |        | 0.002  | 0.02   |        | 0.003  | 0.04   | % / W         |

† Unless otherwise noted, these specifications apply for the following test conditions  $|V_I - V_O| = 5\text{ V}$  and  $I_O = 0.5\text{ A}$ . For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions. All characteristics are measured with a  $0.1\text{-}\mu\text{F}$  capacitor across the input and a  $1\text{-}\mu\text{F}$  capacitor across the output. Pulse-testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately.

‡ Input regulation is expressed here as the percentage change in output voltage per 1-V change at the input.

# LM237, LM337

## 3-TERMINAL ADJUSTABLE REGULATORS

SLVS047D – NOVEMBER 1981 – REVISED MAY 2002


### electrical characteristics, $T_J = 25^\circ\text{C}$

| PARAMETER                                     | TEST CONDITIONST   |                         | LM237, LM337 |              |               | UNIT |
|---|--|-------------------------|--------------|--------------|---------------|------|
|   |  |                         | MIN          | TYP          | MAX           |      |
| Input regulation‡                             | $V_I - V_O = -3\text{ V to } -40\text{ V}$   |                         | 0.01 0.04    |              | %/V           |      |
| Ripple rejection                              | $V_O = -10\text{ V}, \quad f = 120\text{ Hz}$  |                         | 60           |              | dB            |      |
|   | $V_O = -10\text{ V}, \quad C_{\text{ADJ}} = 10\text{ }\mu\text{F}, \quad f = 120\text{ Hz}$                                  |                         | 66           | 77           |               |      |
| Output regulation                             | $I_O = 10\text{ mA to } 1.5\text{ A}$  | $ V_O  \leq 5\text{ V}$ | 50           |              | mV            |      |
|   |  | $ V_O  \geq 5\text{ V}$ | 0.3%         | 1%           |               |      |
| Output noise voltage                          | $f = 10\text{ Hz to } 10\text{ kHz}$   |                         | 0.003%       |              |               |      |
| Minimum output current to maintain regulation | $ V_I - V_O  \leq 40\text{ V}$   |                         | 2.5          | 10           | mA            |      |
|   | $ V_I - V_O  \leq 10\text{ V}$   |                         | 1.5          | 6            |               |      |
| Peak output current                           | $ V_I - V_O  \leq 15\text{ V}$   |                         | 1.5          | 2.2          | A             |      |
|   | $ V_I - V_O  \leq 40\text{ V}$   |                         | 0.15         | 0.4          |               |      |
| Adjustment-terminal current                   |  |                         | 65           | 100          | $\mu\text{A}$ |      |
| Change in adjustment-terminal current         | $V_I - V_O = -2.5\text{ V to } -40\text{ V}, \quad I_O = 10\text{ mA to MAX}$  |                         | 2            | 5            | $\mu\text{A}$ |      |
| Reference voltage (output to ADJ)             | $V_I - V_O = -3\text{ V to } -40\text{ V}, \quad I_O = 10\text{ mA to } 1.5\text{ A}, \quad P \leq \text{rated dissipation}$ |                         | -1.213       | -1.25 -1.287 | V             |      |

† Unless otherwise noted, these specifications apply for the following test conditions  $|V_I - V_O| = 5\text{ V}$  and  $I_O = 0.5\text{ A}$ . All characteristics are measured with a  $0.1\text{-}\mu\text{F}$  capacitor across the input and a  $1\text{-}\mu\text{F}$  capacitor across the output. Pulse-testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately.

‡ Input regulation is expressed here as the percentage change in output voltage per 1-V change at the input.

### APPLICATION INFORMATION

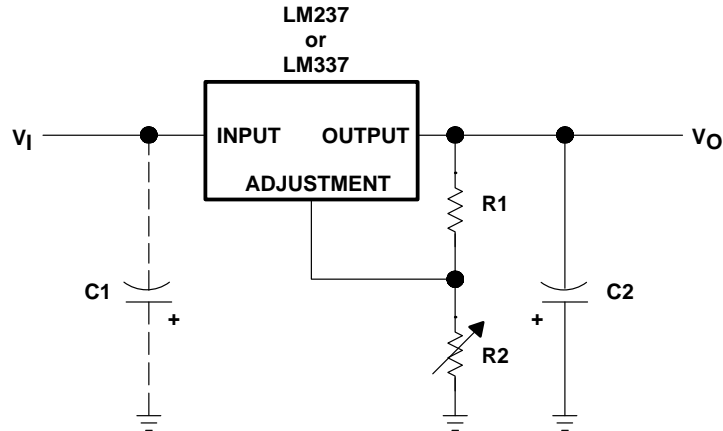


R1 is typically 120  $\Omega$ .

$$R2 = R1 \left( \frac{-V_O}{-1.25} - 1 \right) \text{ where } V_O \text{ is the output in volts.}$$

C1 is a 1- $\mu$ F solid tantalum capacitor required only if the regulator is more than 10 cm (4 in) from the power-supply filter capacitor. C2 is a 1- $\mu$ F solid tantalum or 10- $\mu$ F aluminum electrolytic capacitor required for stability.

**Figure 1. Adjustable Negative-Voltage Regulator**

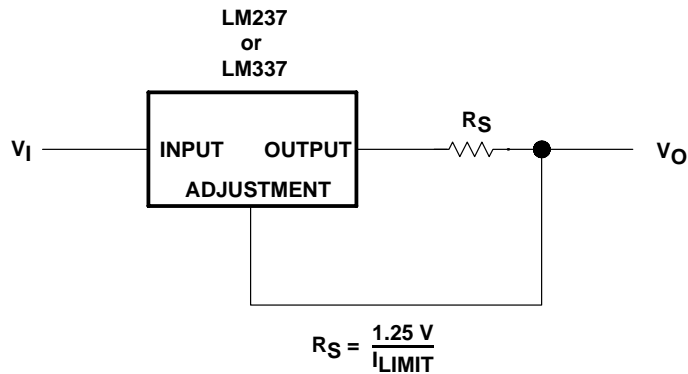

**Figure 2. Current-Limiting Circuit**

## **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Mailing Address:

Texas Instruments  
Post Office Box 655303  
Dallas, Texas 75265