



## Photoelectric sensor receiver LX3R

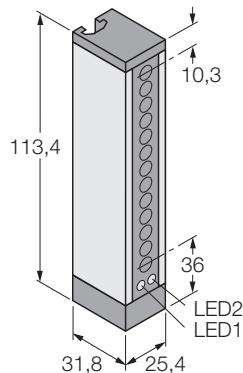

- minimum object size 9.5mm
- connection-programmable for reduced sensing range
- operational voltage 10..0.30 VDC
- degree of protection IP67

### Wiring diagram

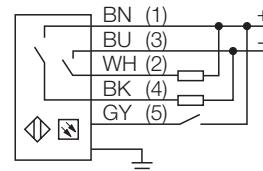

Light screens are especially suited to monitor large areas. They consist of an emitter and a receiver unit. Switching or measuring light screens are available in heights of up to 1.8 m.

<b>Type</b>	LX3R
Ident-No.	3002664
<b>Operating mode</b>	Light screen
Max. sensing range [m]	0,3... 2 m
Height of sensing area	67 mm
Operating temperature	-20 ...+ 70 °C
<b>Rated operational voltage (DC) <math>U_B</math></b>	10... 30 VDC
Rated operational current (DC) $I_e$	$\leq 150$ mA
No-load current $I_0$	$\leq 100$ mA
Short-circuit protection	yes, cyclic
Reverse polarity protection	yes
Output function	normally open, PNP/NPN
Switching frequency	$\leq 150$ Hz
<b>Housing style</b>	rectangular; LX
Dimensions	31,8 x 25,4 x 113,4 mm
Housing material	metal, AL
Lens	Plastic, Acrylic
Wiring	cable
Cable length	2 m
Cable cross section	5 x 0,5 mm <sup>2</sup>
Degree of protection	IP67
<b>Switching status indication</b>	LED yellow
Error indication	LED red flashing