

VFD CONTROLLER DRIVER


GENERAL DESCRIPTION

The NJU3421A is a VFD (Vacuum Fluorescent Display) Controller Driver with key scan function.


It contains display data RAM, address counter, command register, high voltage drivers, and serial interface circuit.

The display data, the command data and the key scanning data can be transmitted with the serial interface circuit, and VFD driving voltage can operate up to 45V. The NJU3421A is useful for car audio, VCR and other VFD application items.

PACKAGE OUTLINE



NJU3421AL




NJU3421AF

FEATURES


- VFD Driving Voltage $|V_{DD}-V_{FDP}| \leq 45V$
- Display Mode
 - 9 Segments Display $\times$ 15 Digits
 - 16 Segments Display $\times$ 8 Digits
- Serial Interface
- Display ON/OFF Function
- Key Scan Function 8×4 Keys max.
- Display Data RAM 30×8 Bits
- Key Input Data RAM 8×4 Bits
- Key Input Detecting Function
- High Driving Current(I/O Ports) $I_o=10mA$ max.
- Oscillation Circuit on-chip
- Power On Initialization
- Operating Voltage $5V \pm 10\%$
- Package Outline SDIP 42 / QFP 44-A1 / BumpChip
- C-MOS Technology

8

BLOCK DIAGRAM

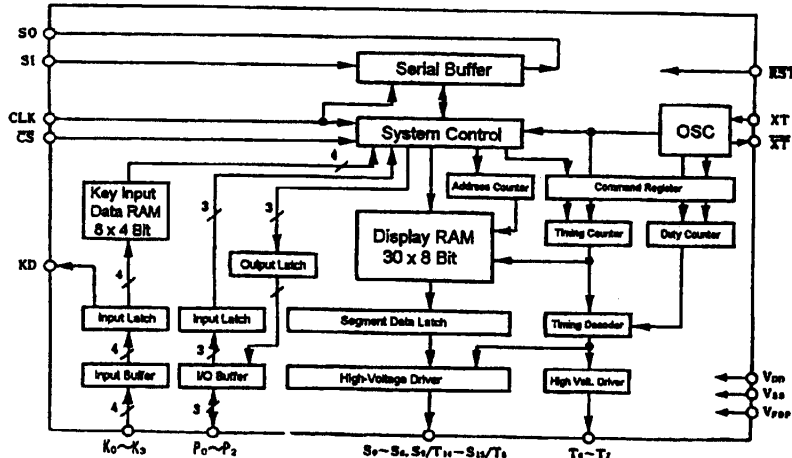

PAD LOCATION

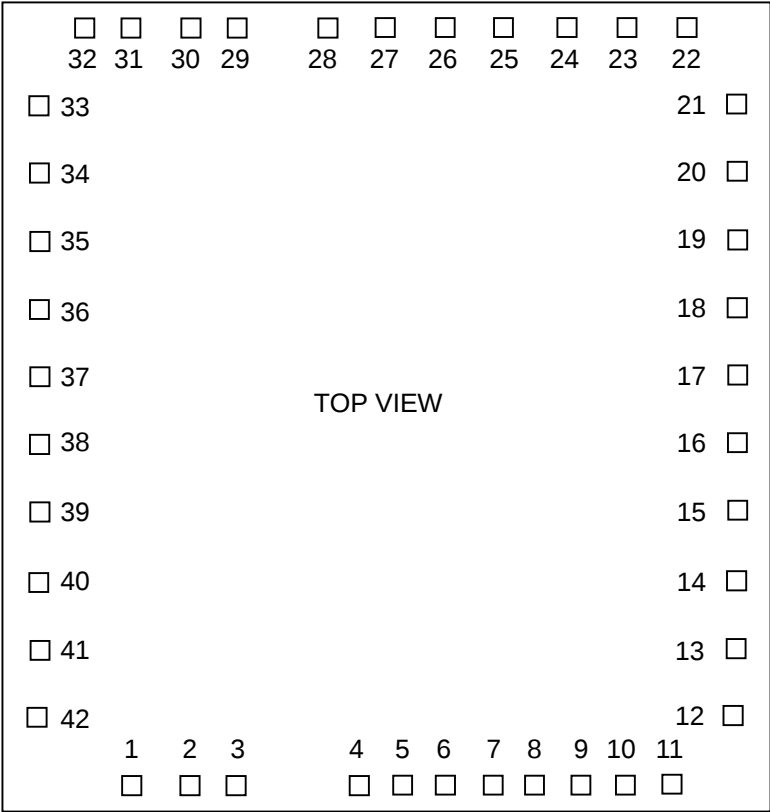



Chip Thickness : 400μm
Chip Center : X=0μm, Y=0μm
Chip Size : X= 3.40 mm, Y= 3.45 mm
Bump Size : 103.0 μm x 103.0 μm
Bump Heght : 15μm(Typ)
Bump Material : Au
Sub striate : N

PAD CORDINATES

Chip Size 3.40 x 3.45 mm(Chip Center X=0μm, Y=0μm)

PAD No.	Terminal	X= μm	Y= μm	PAD No.	Terminal	X= μm	Y= μm
1	K2	-1215	-1444	22	T5	1407	1506
2	K3	-939	-1444	23	T4	1133	1506
3	V _{DD}	-744	-1444	24	T3	859	1506
4	S0	-510	-1506	25	T2	585	1506
5	S1	-286	-1506	26	T1	311	1506
6	S2	-62	-1506	27	T0	37	1506
7	S3	162	-1506	28	V _{FDP}	-145	1506
8	S4	386	-1506	29	P0	-484	1423
9	S5	610	-1506	30	P1	-675	1423
10	S6	834	-1506	31	P2	-1011	1423
11	S7	1058	-1506	32	KD	-1227	1423
12	S8	1481	-1314	33	SO	-1418	1100
13	S9/T14	1481	-1023	34	SI	-1419	883
14	S10/T13	1481	-773	35	CLK	-1419	603
15	S11/T12	1481	-523	36	CS	-1419	407
16	S12/T11	1481	-273	37	RST	-1419	127
17	S13/T10	1481	44	38	XT	-1419	-153
18	S14/T9	1481	324	39	XT	-1419	-446
19	S15/T8	1481	604	40	V _{SS}	-1419	-653
20	T7	1481	884	41	K0	-1419	-880
21	T6	1481	1164	42	K1	-1419	-1156

PIN CONFIGURATION

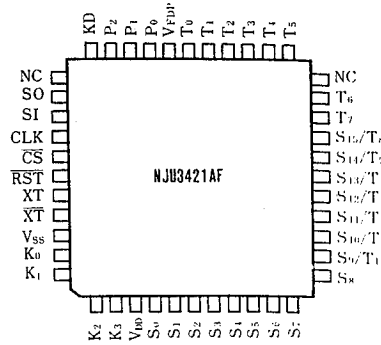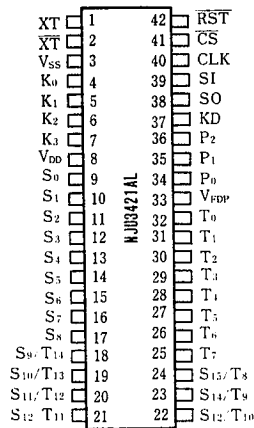

TERMINAL DESCRIPTION


NO.		SYMBOL	FUNCTION
SDIP42	QFP44-A1		
8	3	V _{DD}	POWER SOURCE
3	42	V _{SS}	GND
33	29	V _{FDP}	VFD Driving Voltage
1, 2	40, 41	XT, XT	Oscillation Terminals. For external clock operation, The clock should be input on XT terminal.
4~7	43, 44, 1, 2	K ₀ ~K ₃	Key Input Terminals(Pull-Down Resistance)
37	33	KD	Key Input Detecting Terminal. When key input, "H" level is output from this terminal.
9~17	4~12	S ₀ ~S ₈	Segment Output Terminals(Pull-Down Resistance)
18~24	13~19	S ₉ /T ₁₄ ~S ₁₆ /T ₈	Segment/Timing Output Terminals(Pull-Down Resistance)
25~32	20, 21, 23~28	T ₇ ~T ₀	Timing Output Terminals(Pull-Down Resistance)
42	39	RST	Reset Terminal (Pull-UP Resistance) "L":Reset
34~36	30~32	P ₀ ~P ₂	I/O Ports (Pull-Up Resistance) Output:High current Output(LED Display is available) Input:Available by all "H" output setting.
38	35	SO	Serial Data Output Terminal. The key scan data or the I/O port output data is output.
39	36	SI	Serial Data (Address, I/O Ports, Command, Display) input Terminal.
40	37	CLK	Shift Clock Input Terminal.
41	38	CS	Chip Select Input Terminal. "L":Activated.
-	22, 34	NC	Non Connection.

(2) COMMAND REGISTER

The Command Register is the register for setting the status of Display Duty, Display Digit Number and Display ON/OFF.

When the first word of serial transmitted data is recognized as the command data (The upper one bit of a byte must be "1".), the lower 7 bits are set into the command register. After the command data are received the timing counter is initialized and then the input command is executed. During the initialization of the timing counter and the command execution, the display can be off. Therefore, the frequent command transmission causes the flicker of the display.

The default status of the display mode is display-off by the power on initialization function.

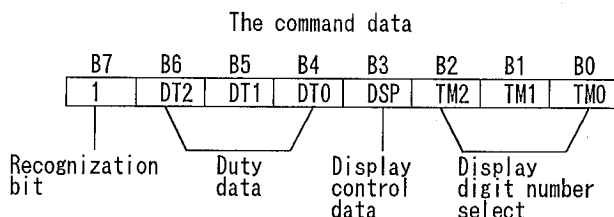

(2-1) Duty set

DT2	DT1	DT0	Timing signal Duty
0	0	0	2/16
0	0	1	4/16
0	1	0	6/16
0	1	1	8/16
1	0	0	10/16
1	0	1	12/16
1	1	0	14/16
1	1	1	15/16

(2-2) Display control set

DSP	Display
0	OFF
1	ON


(2-3) Display digit number set

TM2	TM1	TM0	Digits
0	0	0	8
0	0	1	9
0	1	0	10
0	1	1	11
1	0	0	12
1	0	1	13
1	1	0	14
1	1	1	15


(3) I/O Port

The NJU3421A incorporates three I/O ports. As the output type of these three ports is the constructed by the N-channel and open-drain type FET of the low on-resistance and the pull-up resistor, the output driver can drive the LED. When "H" level is set with the I/O port output data, these I/O ports can be used as the input mode.


When the first word of serial data is recognized as the I/O port output data (the upper two bits of a byte must be "01"), The status of the data of the lower three bits are output from the I/O port.

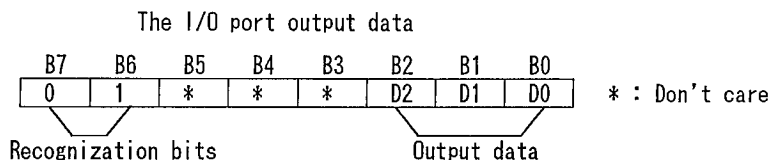

TIMING SIGNAL / DUTY CHANGE WAVEFORM

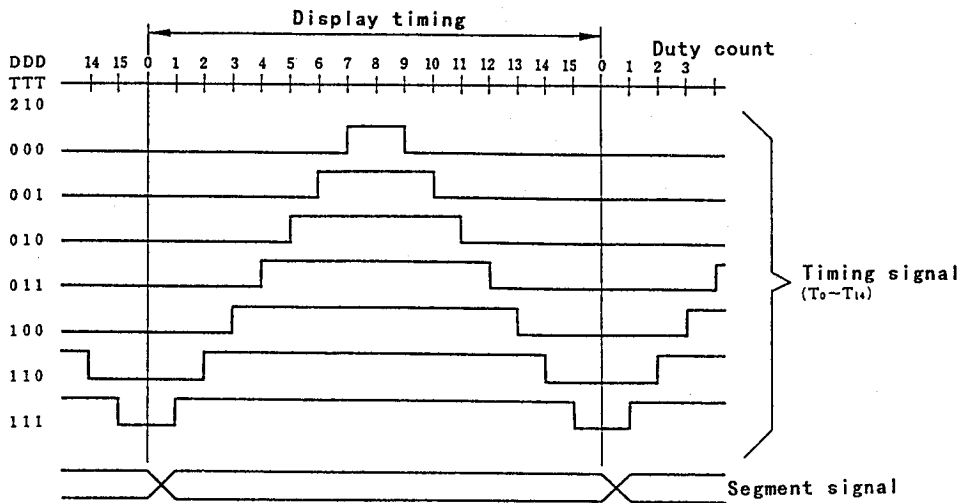


DISPLAY TIMING CHART

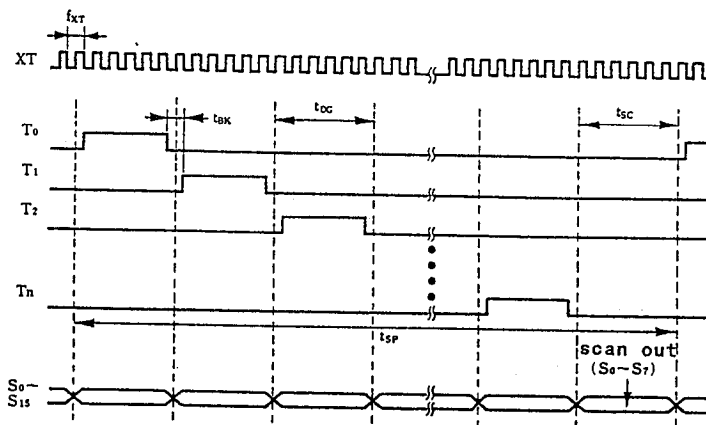


Oscillation frequency	: f_{XT}
Minimum blanking time (Duty 15/16)	: $t_{BK} = (1/f_{XT}) \times 96$
1 character display time	: $t_{DC} = t_{BK} \times 16$
key scanning time	: $t_{SC} = t_{DC}$
1 cycle display time	: $t_{SP} = t_{DC} \times \text{character} + t_{SC}$

FDP DISPLAY OUTPUT WAVEFORM

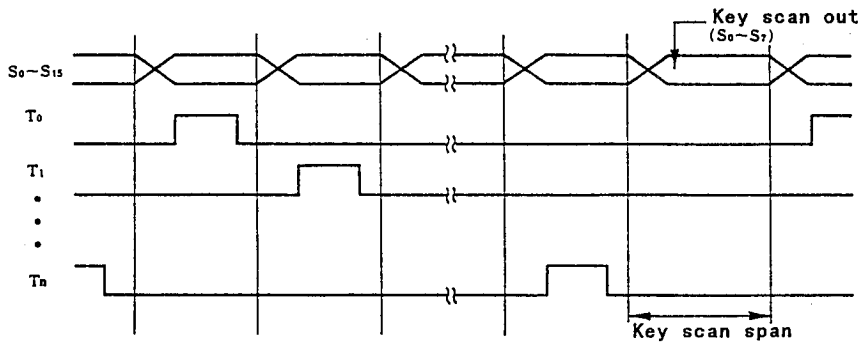

ENLARGED KEY SCAN SPAN

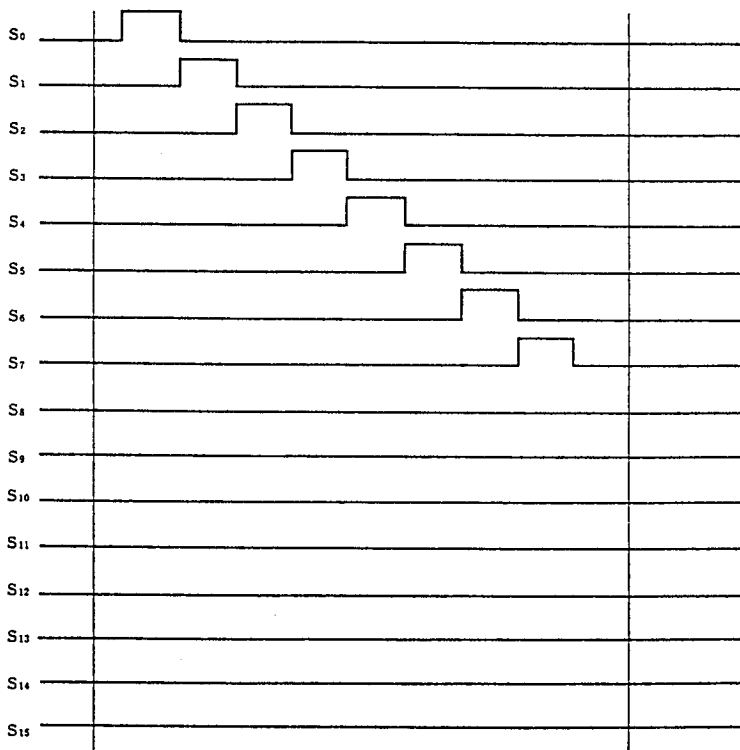

(5) SERIAL DATA TRANSMISSION

The data transmission with the external can be executed by the serial interface circuit only. This interface circuit requires the external shift clock input and can execute the bi-direction (input/output) action synchronously as shown below.

The serial data are grouped at a word which equals to a byte (8 bits) for this device. The serial interface circuit is activated when the CS terminal is set to "L" level. While the CS is "L", the words of the serial data are able to be transmitted using the shift clock (the CLK terminal) and the serial data input or output (the SI or SO terminal) synchronously.


On the data input status, the first transmitted word must be the address, the command or the I/O port output data. When the first word is the address data, the following words should be the display data. When the first word is the command or I/O port output data, the following words, if transmitted, are ineffective.

On the data output status, the transmitted word incorporates the key data corresponding to the lower 4 bits and the I/O port input data corresponding to the upper 4 bits (The MSB is invalid). The key data of the first word means the data by scanning the S_0 , these of the second word means the data by scanning the S_1 , ... finally, these of the 8th word means the data by scanning the S_7 . The I/O port input data means the last status data. For getting all key matrix data (8 x 4 max.), the data transmission of the 8 words is required.


After the key data transmission is ignored at less than 8 words, the next key data transmission is reset to the first (S_0 scanning) word.

8

■ CLK and SI/SO TIMING CHART

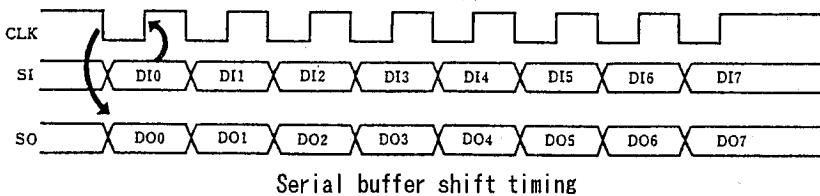

■ SERIAL TRANSMISSION FORMAT

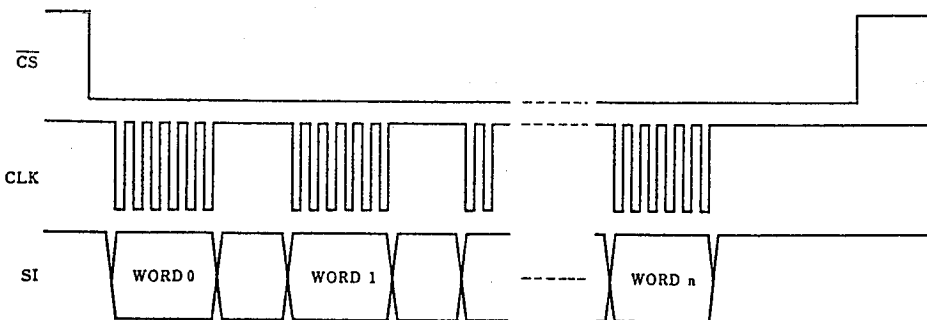

(5-1) SERIAL INPUT DATA

		The address data							
		B7	B6	B5	B4	B3	B2	B1	B0
		0	0	*	AD4	AD3	AD2	AD1	AD0
		* : Don't care							
		The command data							
WORD 0		B7	B6	B5	B4	B3	B2	B1	B0
		1	DT2	DT1	DT0	DSP	TM2	TM1	TMO
		The I/O port output data							
		B7	B6	B5	B4	B3	B2	B1	B0
		0	1	*	*	*	D2	D1	D0
		* : Don't care							

WORD 1~n Display data are required when WORD 0 = address data
Any data are become ineffective when WORD 0 = not address data

(5-2) SERIAL OUTPUT DATA

		Serial output data							
		B7	B6	B5	B4	B3	B2	B1	B0
WORD 0~7		*	P2	P1	P0	K3	K2	K1	K0
		* : Don't care							
		(Key scanning data: S ₀ ~S ₇)							

WORD 8~n Ineffective data

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	CONDITIONS	UNIT
Operating Voltage	V _{DD}	-0.3 ~ +7.0		V
Input Voltage	V _{IN}	-0.3 ~ V _{DD} +0.3		V
Output Voltage	V _{OUT}	-0.3 ~ V _{DD} +0.3		V
VFD Driving Voltage	V _{FDP}	V _{DD} -45~V _{DD} +0.3		V
"H" level Output Current	I _{OH}	-5	For a terminal except the display terminals	mA
	I _{ODH1}	-15	For a terminal, S ₀ ~S ₇ , Terminals only	
	I _{ODH2}	-35	For a terminal, T ₀ ~T ₇ , S ₈ /T ₁₅ ~S ₁₆ /T ₀ Terminals only	
"H" level Total Output Current	Σ I _{OH}	-40	Sum of the output terminal except the display Terminals	mA
	Σ I _{ODH}	-100	Sum of the Display Terminals	
"L" level Output Current	I _{OLC}	20	For a terminal, P ₀ ~P ₁ , Terminals only	mA
"L" level Total Output Current	Σ I _{OL}	100	Sum of the Output terminals	mA
Power Dissipation	P _D	SDIP: 250 QFP: 300		mW
Operating Temperature Range	T _{opr}	-30 ~ + 80		°C
Storage Temperature Range	T _{stg}	-55 ~ +125		°C

ELECTRICAL CHARACTERISTICS




(Ta=25°C, V_{SS}=0V)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Voltage	V _{DD}	V _{DD} Terminal	4.5		5.5	V
"H" Level Input Voltage	V _{IH1}	XT, $\overline{\text{RST}}$, $\overline{\text{CS}}$, SI, CLK, P ₀ ~P ₂ Terminals	0.8V _{DD}			V
	V _{IH2}	K ₀ ~K ₃ Terminals	0.4V _{DD}			V
"L" Level Input Voltage	V _{IL1}	XT, $\overline{\text{RST}}$, $\overline{\text{CS}}$, SI, CLK, P ₀ ~P ₂ Terminals			0.2V _{DD}	V
	V _{IL2}	K ₀ ~K ₃ Terminals			0.16V _{DD}	V
"H" Level Output Voltage	V _{OH1}	KD, S0 Terminals V _{DD} =4.5V, I _{OH1} =-0.5mA	4.0			V
	V _{OH2}	KD, S0 Terminals V _{DD} =4.5V, I _{OH2} =-1.2mA	3.5			
"L" Level Output Voltage	V _{OL1}	KD, S0 Terminals V _{DD} =4.5V, I _{OL1} =+1.8mA			0.4	V
	V _{OL2}	KD, S0 Terminals V _{DD} =4.5V, I _{OL2} =+3.6mA			0.6	
	V _{OL3}	P ₀ ~P ₂ Terminals V _{DD} =4.5V, I _{OL3} =+10mA			0.4	
Input Off Leak Current	I _{IZ}	$\overline{\text{CS}}$, CLK, SI Terminals V _{DD} =5.5V, V _I =0 or 5.5V			±1	μA
Display Output Current	I _{OH}	S ₀ ~S ₈ Terminals V _{DD} =4.5V, V _{OH} =V _{DD} -2.5V	-7			mA
		S ₉ /T ₁₄ ~S ₁₅ /T ₈ , T ₀ ~T ₇ Term. V _{DD} =4.5V, V _{OH} =V _{DD} -2.5V	-15			
Pull-Up Resistance	R _{UR}	$\overline{\text{RST}}$ Terminal V _{DD} =5.0V, V _I =V _{SS}	140		260	kΩ
	R _{UP}	P ₀ ~P ₂ Terminals V _{DD} =5.0V, V _I =V _{SS}	10		20	
Pull-Down resistance	R _{DK}	K ₀ ~K ₃ Terminals V _{DD} =5.0V, V _I =V _{SS}	20		50	kΩ
	R _{DST}	S ₀ ~S ₈ , S ₉ /T ₁₄ ~S ₁₅ /T ₈ , T ₀ ~T ₇ V _{DD} =5.0V, V _O =V _{SS} , V _{FDP} =V _{DD} -40V	70		200	
Logic Operating Current	I _{DD1}	V _{SS} Terminal, V _{DD} =5.0V, 4MHz Ceramic resonator, C ₁ =C ₂ =27pF Output Open, All Segment or Timing Output is OFF		1	2	mA
Display Operating Current	I _{DD2}	V _{FDP} Terminal, V _{DD} =5.0V, Output Open except S ₀ ~S ₈ , T ₀ ~T ₇ S ₉ /T ₁₄ ~S ₁₅ /T ₈ All Segment or Timing Output is ON		7	10	mA

AC Characteristics

($T_a=25^{\circ}\text{C}$, $V_{DD}=5\text{V}\pm 10\%$, $V_{SS}=0\text{V}$)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Oscillation Frequency	f_{XT}	Fig. 1	1	4	5	MHz
External Clock Input	f_{CL}				20	ns
External Clock Rise Time	t_{CLH}				20	ns
External Clock Fall Time	t_{CLL}	Fig. 2	60			ns
Serial Input Setup Time	t_{SIS}		10			ns
Serial Input Hold Time	t_{SIH}	Fig. 2, Load=50pF			120	ns
Serial Output Delay Time	t_{SOD}				$f_{XT}/3$	MHz
Shift Clock Frequency	f_{CLK}	Fig. 3	10			us
Shift Clock Interval Time	t_{CLKI}		20		30	us
Minimum Blanking Time	t_{BK}	Fig. 4, @ $f_{XT}=4\text{MHz}$	20			us
"L" level Time	t_{KSL}		20		30	us
"H" level Time	t_{KSH}	Fig. 5, @ $f_{XT}=4\text{MHz}$, Key scan	0.05		50	ms
Power Rise Time	t_R		10			us
Reset Pulse Width	t_{RST}	Fig. 6				

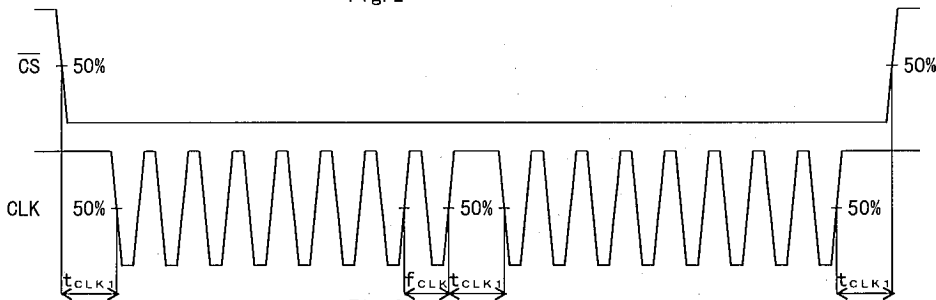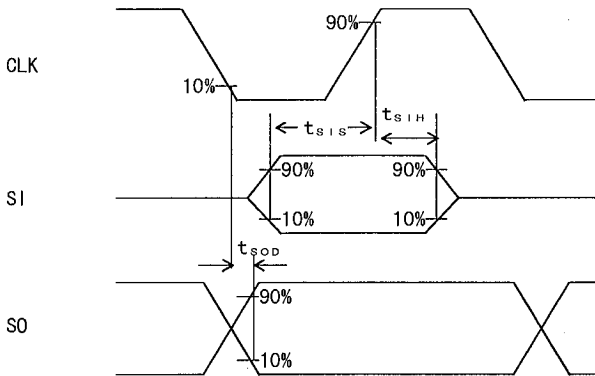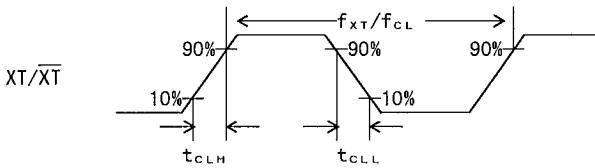

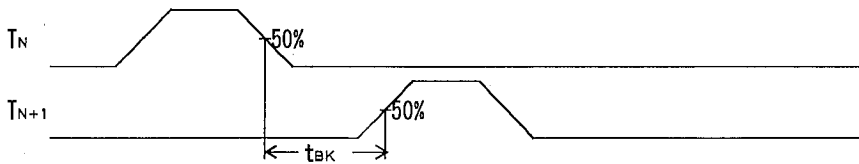


FIG.4

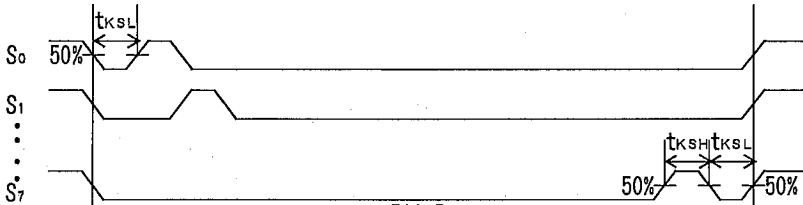


FIG.5


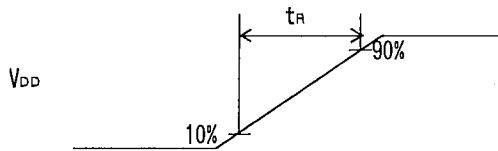


FIG.6

■ APPLICATION CIRCUIT

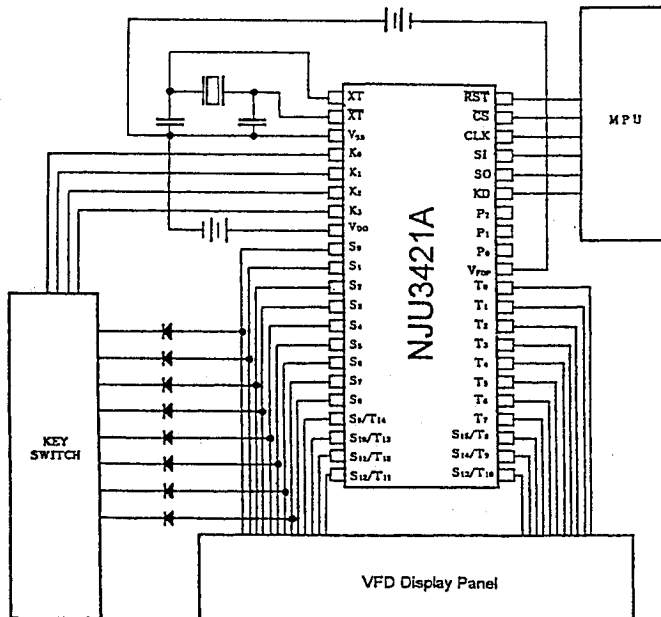

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.