



Inductive sensor

Ni4-M12-AZ31X



- threaded barrel, M12 x 1
- chrome-plated brass
- 2-wire AC, 20...250 VAC
- 2-wire DC, 10...300 VDC
- normally open
- cable connection

Wiring diagram



Function principles


Inductive proximity switches are designed for wear-free non-contact detection of metal objects. For this they use a high-frequency electro-magnetic AC field that interacts with the target. With inductive sensors, this field is generated by an LC resonant circuit with a ferrite core coil.

Type	Ni4-M12-AZ31X
Ident-No.	13032
Rated operating distance Sn	4 mm
Mounting mode	non-flush
Hysteresis (switching distance)	3... 15 %
Min. repeat accuracy	≤ 2 %
Temperature drift	≤ ± 10 %
Operating temperature	-25 ...+ 70 °C
Rated operational voltage (AC) U_B	20... 250 VAC
Rated operational voltage (DC) U _B	10... 300 VDC
Rated operational current (AC) I _e	≤ 100 mA
Rated operational current (DC) I _e	≤ 100 mA
Line frequency	50... 60 Hz
Max. OFF-state current	≤ 1,7 mA
Max. switching frequency	≤ 0,02 kHz
Rated insulation voltage	≤ 1,5 kV
Surge Current	≤ 1 A (≤ 10 ms max. 5 Hz)
Output function	2-wire, normally open
Max. voltage drop at I _e	≤ 6 V
Min. operational current I _m	≥ 3 mA
Housing style	threaded barrel; M12 x 1
Dimensions	64 mm
Housing material	metal, CuZn, chrome-plated
Active face	plastic, PA12-GF30
Max. fixing torque of coupling nut	10 Nm
Wiring	cable
Cable	Ø 5,2, LifYY, PVC, 2 m
Cable cross section	2 x 0,34 mm ²
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 x g (11 ms)
Degree of protection	IP67
Switching status indication	LED red

Inductive sensor

Ni4-M12-AZ31X

Mounting instructions	minimum gap
Gap D	3 x B
Gap W	3 x Sn
Gap T	3 x B
Gap S	1,5 x B
Gap G	6 x Sn
Gap N	2 x Sn
Diameter of active face B	Ø 12 mm

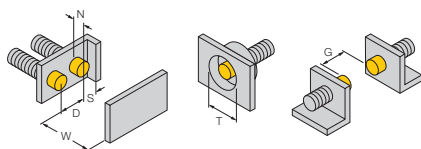

Inductive sensor

Ni4-M12-AZ31X

Accessories

Typ	Ident-No.	Description	Dimension drawing
QM-12	6945101	quick-mount fixing clamp with dead-stop; material: chrome-plated brass external thread M16 x 1	
BST-12B	6947212	fixing clamp with dead-stop; material: PA6	