



Inductive sensor

Ni40-CP80-VP4X2

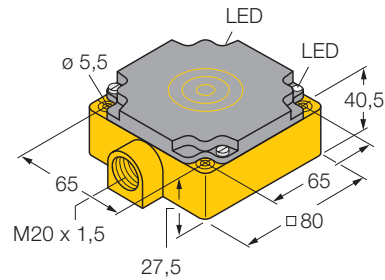

- rectangular, height 41 mm
- plastic, PBT-GF30-V0
- 4-wire DC, 10...65 VDC
- SPDT, pnp output
- terminal chamber

Wiring diagram



Function principles

Inductive proximity switches are designed for wear-free non-contact detection of metal objects. For this they use a high-frequency electro-magnetic AC field that interacts with the target. With inductive sensors, this field is generated by an LC resonant circuit with a ferrite core coil.

Type	Ni40-CP80-VP4X2
Ident-No.	15695
Rated operating distance Sn	40 mm
Mounting mode	non-flush
Hysteresis (switching distance)	3... 15 %
Min. repeat accuracy	≤ 2 %
Temperature drift	≤ ± 10 %
Operating temperature	-25 ...+ 70 °C
Rated operational voltage (DC) U_B	10... 65 VDC
Max. ripple	≤ 10 % U _{pp}
Rated operational current (DC) I _e	≤ 200 mA
No-load current I ₀	≤ 15 mA
Max. OFF-state current	≤ 0,1 mA
Max. switching frequency	≤ 0,1 kHz
Rated insulation voltage	≤ 0,5 kV
Output function	4-wire, complementary, PNP
Short-circuit protection	yes, cyclic
Max. voltage drop at I _e	≤ 1,8 V
Wire breakage / reverse polarity protection	yes / complete
Housing style	rectangular; CP80
Dimensions	80 x 80 x 41 mm
Housing material	plastic, PBT-GF30-V0
Active face	plastic, PBT-GF30-V0
Wiring	terminal chamber
Clamping ability	≤ 2,5 mm ²
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 x g (11 ms)
Degree of protection	IP67
Supply voltage indication	LED green
Switching status indication	LED yellow

Inductive sensor

Ni40-CP80-VP4X2

Mounting instructions

	minimum gap
Gap D	3 x B
Gap W	3 x Sn
Gap S	1,5 x B
Gap G	6 x Sn
Gap N	1 x B
Gap A	1 x B
Gap C	1 x B

Width of active face B

80 mm

