



# OPA2541

## Dual High Power OPERATIONAL AMPLIFIER

### FEATURES

- OUTPUT CURRENTS TO 5A
- POWER SUPPLIES TO  $\pm 40V$
- FET INPUT
- ELECTRICALLY ISOLATED CASE

### APPLICATIONS


- MOTOR DRIVER
- SERVO AMPLIFIER
- SYNCRO/RESOLVER EXCITATION
- VOICE COIL DRIVER
- BRIDGE AMPLIFIER
- PROGRAMMABLE POWER SUPPLY
- AUDIO AMPLIFIER

### DESCRIPTION

The OPA2541 is a dual power operational amplifier capable of operation from power supplies up to  $\pm 40V$  and output currents of 5A continuous. With two monolithic power amplifiers in a single package it provides unequalled functional density.

The industry-standard 8-pin TO-3 package is isolated from all internal circuitry allowing it to be mounted directly to a heat sink without insulators which degrade thermal performance. Internal circuitry limits output current to approximately 6A.

The OPA2541 is available in both industrial and military temperature range versions.

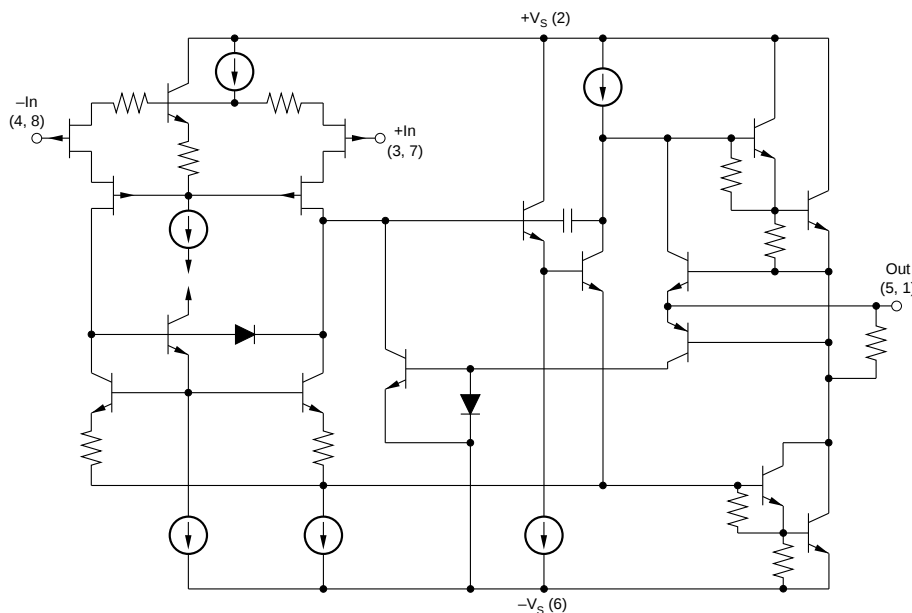

International Airport Industrial Park • Mailing Address: PO Box 11400 • Tucson, AZ 85734 • Street Address: 6730 S. Tucson Blvd. • Tucson, AZ 85706  
Tel: (520) 746-1111 • Twx: 910-952-1111 • Cable: BBRCORP • Telex: 066-6491 • FAX: (520) 889-1510 • Immediate Product Info: (800) 548-6132

# SPECIFICATIONS

## ELECTRICAL

At  $T_C = +25^\circ\text{C}$  and  $V_S = \pm 35\text{VDC}$ , unless otherwise noted.

| PARAMETER                                                                                                                                | CONDITIONS                                                                                                                                                                         | OPA2541AM                                                                                   |                                                                                                   |                          | OPA2541BM, SM         |                         |                       | UNITS                                |
|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--------------------------|-----------------------|-------------------------|-----------------------|--------------------------------------|
|                                                                                                                                          |                                                                                                                                                                                    | MIN                                                                                         | TYP                                                                                               | MAX                      | MIN                   | TYP                     | MAX                   |                                      |
| INPUT OFFSET VOLTAGE                                                                                                                     |                                                                                                                                                                                    |                                                                                             |                                                                                                   |                          |                       |                         |                       |                                      |
| V <sub>OS</sub><br>vs Temperature<br>vs Supply Voltage<br>vs Power                                                                       | Specified Temperature Range<br>V <sub>S</sub> = ±10V to ±V <sub>MAX</sub>                                                                                                          |                                                                                             | ±2<br>±20<br>±2.5<br>±20                                                                          | ±10<br>±40<br>±10<br>±60 |                       | ±0.25<br>±15<br>*<br>*  | ±1<br>±30<br>*<br>*   | mV<br>μV/°C<br>μV/V<br>μV/W          |
| INPUT BIAS CURRENT                                                                                                                       |                                                                                                                                                                                    |                                                                                             |                                                                                                   |                          |                       |                         |                       |                                      |
| I <sub>B</sub>                                                                                                                           | Specified Temperature Range                                                                                                                                                        |                                                                                             | 15<br>Note 1                                                                                      | 50                       |                       | *<br>*                  | *<br>*                | pA                                   |
| INPUT OFFSET CURRENT                                                                                                                     |                                                                                                                                                                                    |                                                                                             |                                                                                                   |                          |                       |                         |                       |                                      |
| I <sub>OS</sub>                                                                                                                          | Specified Temperature Range                                                                                                                                                        |                                                                                             | ±5<br>Note 1                                                                                      | ±30                      |                       | *<br>*                  | *<br>*                | pA                                   |
| INPUT CHARACTERISTICS                                                                                                                    |                                                                                                                                                                                    |                                                                                             |                                                                                                   |                          |                       |                         |                       |                                      |
| Common-Mode Voltage Range<br>Common-Mode Rejection<br>Input Capacitance<br>Input Impedance, DC                                           | Specified Temperature Range<br>V <sub>CM</sub> = ( ±V <sub>S</sub>   –6V)                                                                                                          | ±( V <sub>S</sub>   –6)<br>95                                                               | ±( V <sub>S</sub>   –3)<br>106<br>5<br>1                                                          |                          | *<br>*<br>*<br>*      | *<br>*<br>*<br>*        |                       | V<br>dB<br>pF<br>10 <sup>12</sup> Ω  |
| GAIN CHARACTERISTICS                                                                                                                     |                                                                                                                                                                                    |                                                                                             |                                                                                                   |                          |                       |                         |                       |                                      |
| Open Loop Gain at 10Hz<br>Gain-Bandwidth Product                                                                                         | R <sub>L</sub> = 6Ω                                                                                                                                                                | 90                                                                                          | 96<br>1.6                                                                                         |                          | *<br>*                | *<br>*                  |                       | dB<br>MHz                            |
| OUTPUT                                                                                                                                   |                                                                                                                                                                                    |                                                                                             |                                                                                                   |                          |                       |                         |                       |                                      |
| Voltage Swing<br><br><br>Current, Continuous                                                                                             | I <sub>O</sub> = 5A<br>I <sub>O</sub> = 2A<br>I <sub>O</sub> = 0.5A<br>+25°C<br>+85°C<br>+125°C (SM grade only)                                                                    | ±( V <sub>S</sub>   –5.5)<br>±( V <sub>S</sub>   –4.5)<br>±( V <sub>S</sub>   –4)<br>5<br>4 | ±( V <sub>S</sub>   –4.5)<br>±( V <sub>S</sub>   –3.6)<br>±( V <sub>S</sub>   –3.2)<br>7.0<br>5.0 |                          | *<br>*<br>*<br>*<br>* | *<br>*<br>*<br>*<br>3.5 |                       | V<br>V<br>V<br>A<br>A<br>A           |
| AC PERFORMANCE                                                                                                                           |                                                                                                                                                                                    |                                                                                             |                                                                                                   |                          |                       |                         |                       |                                      |
| Slew Rate<br>Power Bandwidth<br>Settling Time to 0.1%                                                                                    | R <sub>L</sub> = 8Ω, V <sub>O</sub> = 20Vrms<br>2V Step                                                                                                                            | 6<br>45                                                                                     | 8<br>55<br>2                                                                                      |                          | *<br>*                | *<br>*<br>*             |                       | V/μs<br>kHz<br>μs                    |
| Capacitive Load<br><br>Phase Margin<br>Channel Separation                                                                                | Specified Temperature Range, G = 1<br>Specified Temperature Range, G >10<br>Specified Temperature Range, R <sub>L</sub> = 8Ω<br>1kHz, R <sub>L</sub> = 6Ω                          |                                                                                             |                                                                                                   | 3.3<br>SOA               |                       | *<br>*                  | *<br>*                | nF<br><br>Degrees<br>dB              |
| POWER SUPPLY                                                                                                                             |                                                                                                                                                                                    |                                                                                             |                                                                                                   |                          |                       |                         |                       |                                      |
| Power Supply Voltage, ±V <sub>S</sub><br>Current, Quiescent                                                                              | Specified Temperature Range<br>Total—Both Amplifiers                                                                                                                               | ±10                                                                                         | ±30<br>40                                                                                         | ±35<br>50                | *<br>*                | ±35<br>*                | ±40<br>*              | V<br>mA                              |
| THERMAL RESISTANCE                                                                                                                       |                                                                                                                                                                                    |                                                                                             |                                                                                                   |                          |                       |                         |                       |                                      |
| θ <sub>JC</sub> , (Junction-to-Case)<br>θ <sub>JC</sub><br>θ <sub>JC</sub><br>θ <sub>JC</sub><br>θ <sub>JA</sub> , (Junction-to-Ambient) | Both Amplifiers <sup>(2)</sup> , AC Output f > 60Hz<br>Both Amplifiers <sup>(2)</sup> , DC Output<br>One Amplifier, AC Output f > 60Hz<br>One Amplifier, DC Output<br>No Heat Sink |                                                                                             | 0.8<br>0.9<br>1.25<br>1.4<br>30                                                                   | 1.0<br>1.2<br>1.5<br>1.9 |                       | *<br>*<br>*<br>*<br>*   | *<br>*<br>*<br>*<br>* | °C/W<br>°C/W<br>°C/W<br>°C/W<br>°C/W |
| TEMPERATURE RANGE                                                                                                                        |                                                                                                                                                                                    |                                                                                             |                                                                                                   |                          |                       |                         |                       |                                      |
| Case                                                                                                                                     | AM, BM<br>SM                                                                                                                                                                       | –25                                                                                         |                                                                                                   | +85                      | *<br>–55              |                         | *<br>+125             | °C<br>°C                             |

\*Specification same as OPA2541AM.

NOTES: (1) Input bias and offset current approximately doubles for every  $10^\circ\text{C}$  increase in temperature. (2) Assumes equal dissipation in both amplifiers.


The information provided herein is believed to be reliable; however, BURR-BROWN assumes no responsibility for inaccuracies or omissions. BURR-BROWN assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. BURR-BROWN does not authorize or warrant any BURR-BROWN product for use in life support devices and/or systems.

## ABSOLUTE MAXIMUM RATINGS

|                                                  |                 |
|--------------------------------------------------|-----------------|
| Supply Voltage, $+V_S$ to $-V_S$ .....           | 80V             |
| Output Current .....                             | see SOA         |
| Power Dissipation, Internal <sup>(1)</sup> ..... | 125W            |
| Input Voltage: Differential .....                | $\pm V_S$       |
| Common-mode .....                                | $\pm V_S$       |
| Temperature: Pin Solder, 10s .....               | +300°C          |
| Junction <sup>(1)</sup> .....                    | +150°C          |
| Temperature Range:                               |                 |
| Storage .....                                    | -65°C to +150°C |
| Operating (Case) .....                           | -55°C to +125°C |

NOTE: (1) Long term operation at the maximum junction temperature will result in reduced product life. Derate internal power dissipation to achieve high MTTF.

## CONNECTION DIAGRAM

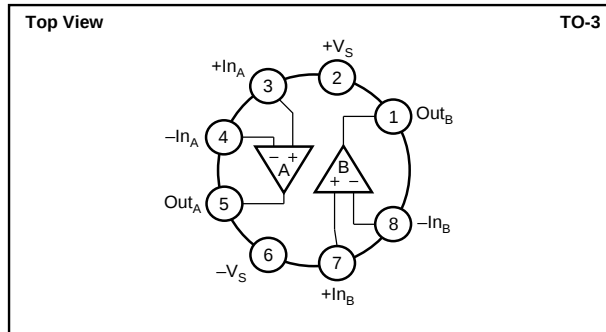

## PACKAGE INFORMATION

| MODEL     | PACKAGE | PACKAGE DRAWING NUMBER <sup>(1)</sup> |
|-----------|---------|---------------------------------------|
| OPA2541AM | TO-3    | 030                                   |
| OPA2541BM | TO-3    | 030                                   |
| OPA2541SM | TO-3    | 030                                   |



NOTE: (1) For detailed drawing and dimension table, please see end of data sheet, or Appendix D of Burr-Brown IC Data Book.

## ORDERING INFORMATION

| MODEL     | PACKAGE | TEMPERATURE RANGE |
|-----------|---------|-------------------|
| OPA2541AM | TO-3    | -25°C to +85°C    |
| OPA2541BM | TO-3    | -25°C to +85°C    |
| OPA2541SM | TO-3    | -55°C to +125°C   |







## TYPICAL PERFORMANCE CURVES

$T_A = +25^\circ\text{C}$  and  $V_S = \pm 35\text{VDC}$ , unless otherwise noted.

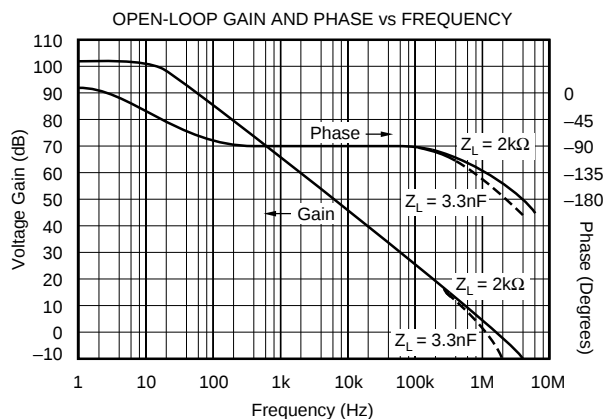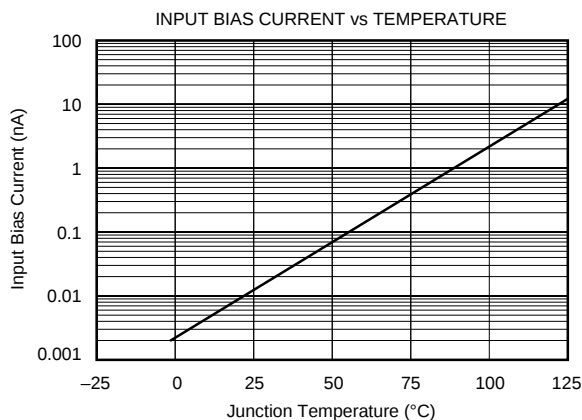


# TYPICAL PERFORMANCE CURVES (CONT)

$T_A = +25^\circ\text{C}$  and  $V_S = \pm 35\text{VDC}$ , unless otherwise noted.

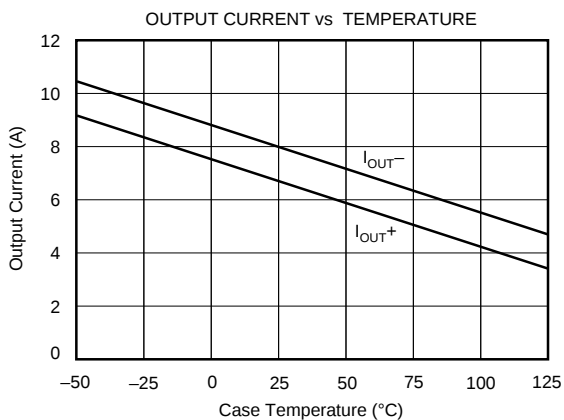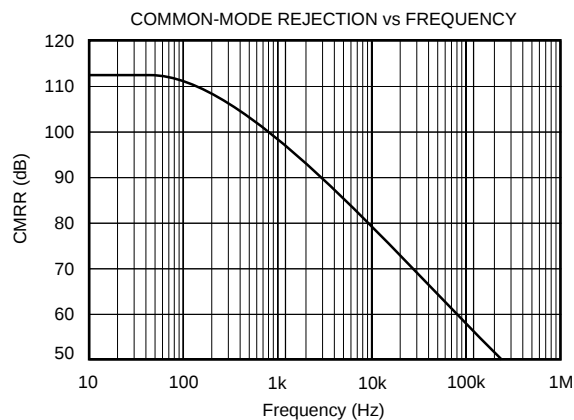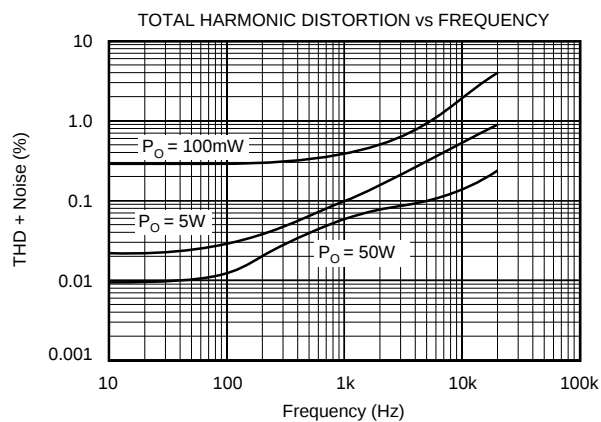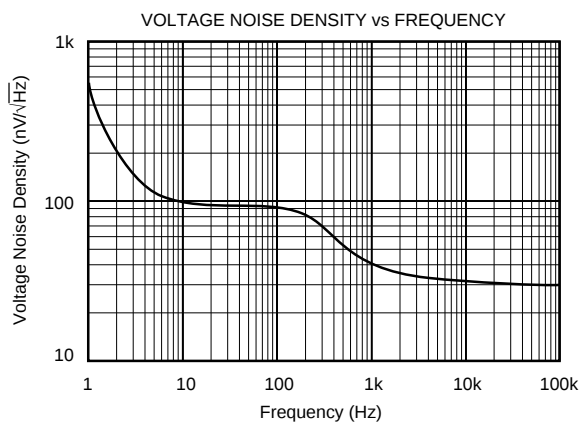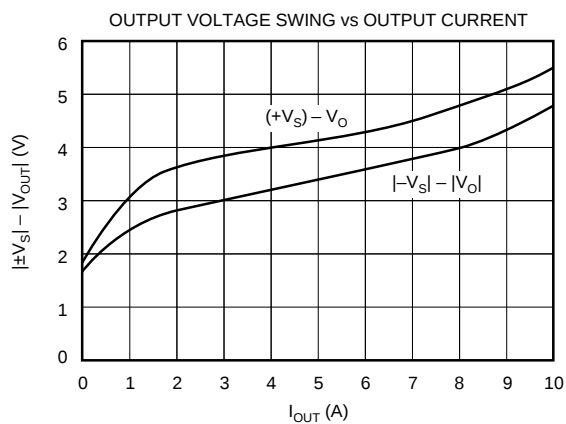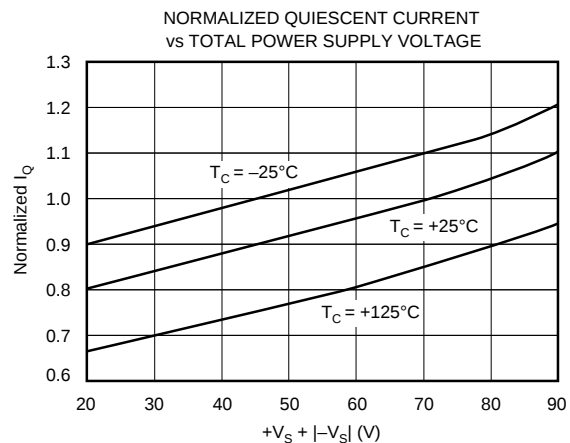


## TYPICAL PERFORMANCE CURVES (CONT)

$T_A = +25^\circ\text{C}$  and  $V_S = \pm 35\text{VDC}$ , unless otherwise noted.

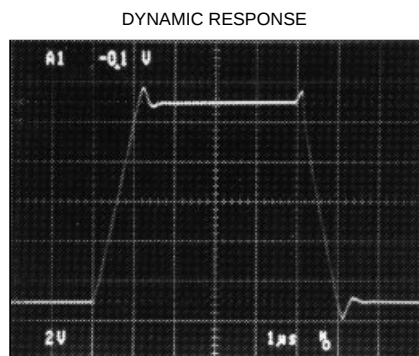

$Z_{\text{LOAD}} = \infty$ ,  $V_S = \pm 35\text{V}$ ,  $A_V = +1$

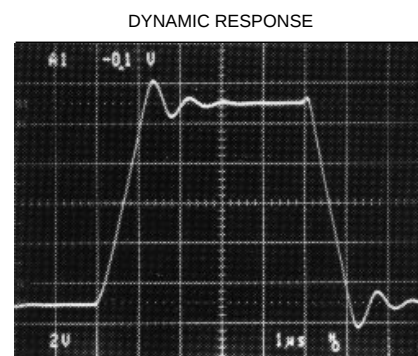

$Z_{\text{LOAD}} = 4700\text{pF}$ ,  $V_S = \pm 35\text{V}$ ,  $A_V = +1$

## INSTALLATION INSTRUCTIONS

### POWER SUPPLIES

The OPA2541 is specified for operation from power supplies up to  $\pm 40\text{V}$ . It can also be operated from an unbalanced or a single power supply so long as the total power supply voltage does not exceed  $80\text{V}$  ( $70\text{V}$  for “AM” grade). The power supplies should be bypassed with low series impedance capacitors such as ceramic or tantalum. These should be located as near as practical to the amplifier’s power supply pins. Good power amplifier circuit layout is, in general, like good high-frequency layout. Consider the path of large power supply and output currents. Avoid routing these connections near low-level input circuitry to avoid waveform distortion and instability.

Signal dependent load current can modulate the power supply voltage with inadequate power supply bypassing. This can affect both amplifiers’ outputs. Since the second amplifier’s signal may not be related to the first, this will degrade the inherent channel separation of the OPA2541.

### HEAT SINKING

Most applications will require a heat sink to prevent junction temperatures from exceeding the  $150^\circ\text{C}$  maximum rating. The type of heat sink required will depend on the output signals, power dissipation of each amplifier, and ambient temperature. The thermal resistance from junction-to-case,  $\theta_{\text{JC}}$ , depends on how the power dissipation is distributed on the amplifier die.

DC output concentrates the power dissipation in one output transistor. AC output distributes the power dissipation equally between the two output transistors and therefore has lower thermal resistance. Similarly, the power dissipation may be all in one amplifier (worst case) or equally distributed between the two amplifiers (best case). Thermal resistances are provided for each of these possibilities. The case-to-junction temperature rise is the product of the power dissipation

(total of both amplifiers) times the appropriate thermal resistance—

$$\Delta T_{\text{JC}} = (P_{\text{D total}}) (\theta_{\text{JC}}).$$

Sufficient heat sinking must be provided to keep the case temperature within safe limits for the maximum ambient temperature and power dissipation. The thermal resistance of the heat sink required may be calculated by:

$$\theta_{\text{HS}} = (150^\circ\text{C} - \Delta T_{\text{JC}} - T_A) / P_{\text{D}}.$$

Commercially available heat sinks usually specify thermal resistance. These ratings are often suspect, however, since they depend greatly on the mounting environment and air flow conditions. Actual thermal performance should be verified by measurement of case temperature under the required load and environmental conditions.

No insulating hardware is required when using the OPA2541. Since mica and other similar insulators typically add  $0.7^\circ\text{C/W}$  thermal resistance, this is a significant advantage. See Burr-Brown Application Note AN-83 for further details on heat sinking.

### SAFE OPERATING AREA

The Safe Operating Area (SOA) curve provides comprehensive information on the power handling abilities of the OPA2541. It shows the allowable output current as a function of the voltage across the conducting output transistor (see Figure 1). This voltage is equal to the power supply voltage minus the output voltage. For example, as the amplifier output swings near the positive power supply voltage, the voltage across the output transistor decreases and the device can safely provide large output currents demanded by the load.

The internal current limit will not provide short-circuit protection in most applications. When the amplifier output is shorted to ground, the full power supply voltage is impressed across the conducting output transistor. For instance, with  $V_s = \pm 35\text{V}$ , a short circuit to ground would impress 35V across the conducting power transistor. The maximum safe output current at this voltage is 1.8A, so the internal current limit would not protect the amplifier. The unit-to-unit variation and temperature dependence of the internal current limit suggest that it be used to handle abnormal conditions and not activated in commonly encountered circuit operation.

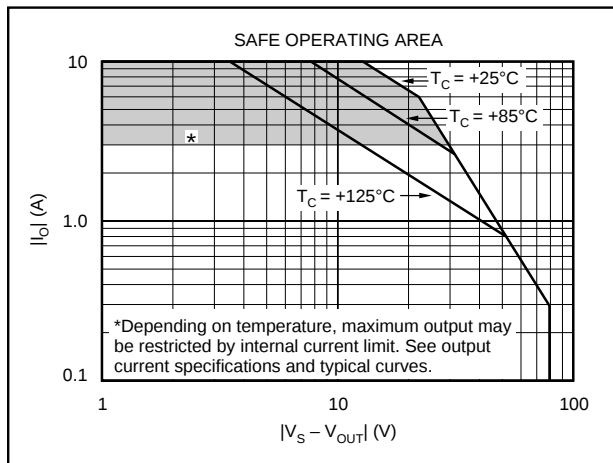


FIGURE 1. Safe Operating Area.

Reactive, or EMF generating loads such as DC motors can present demanding SOA requirements. With a purely reactive load, output voltage current occurs when the output voltage is zero and the voltage across the conducting transistor is equal to the full power supply voltage. See Burr-Brown Application Note AN-123 for further information on evaluating SOA.

Applications with inductive or EMF-generating loads which can produce “kick back” voltage surges to the amplifiers should include clamp diodes from the output terminals to the power supplies. These diodes should be chosen to limit the peak amplifier output voltage surges to less than 2V beyond the power supply rail voltage. Common 1A rated rectifier diodes will suffice in most applications.

## APPLICATIONS CIRCUITS

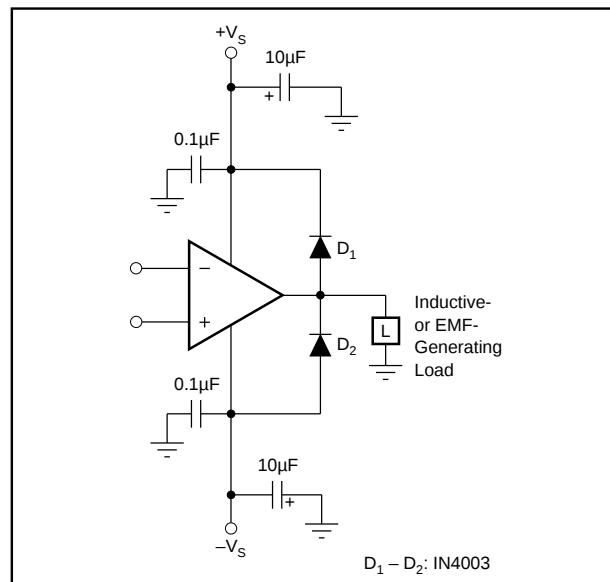


FIGURE 2. Clamping Output for EMF-Generating Loads.

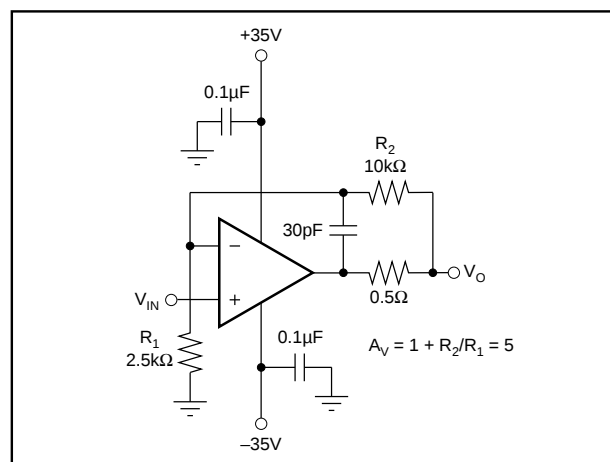


FIGURE 3. Isolating Capacitive Loads.

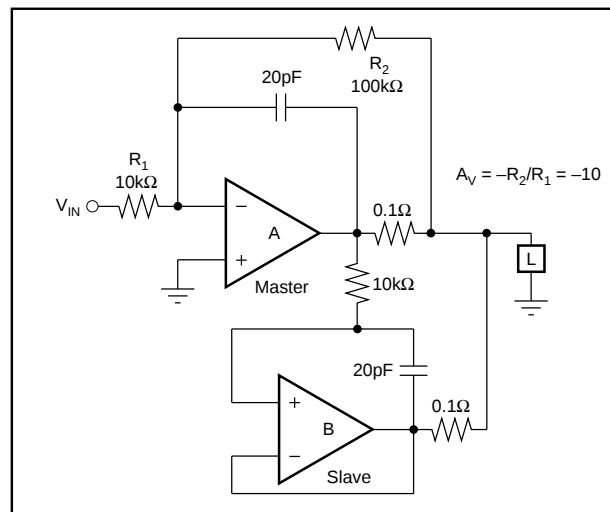


FIGURE 4. Paralleled Operation, Extended SOA.

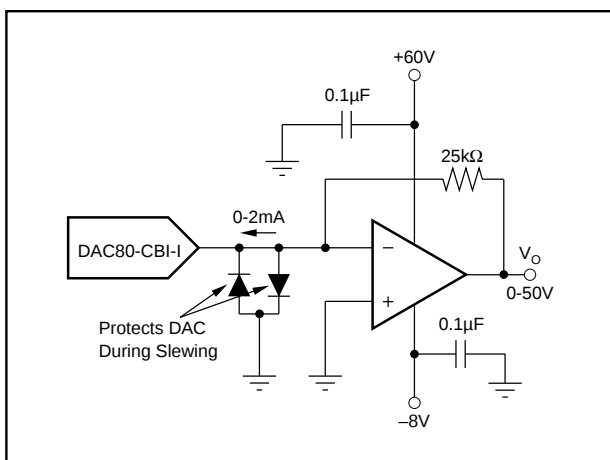


FIGURE 5. Programmable Voltage Source.

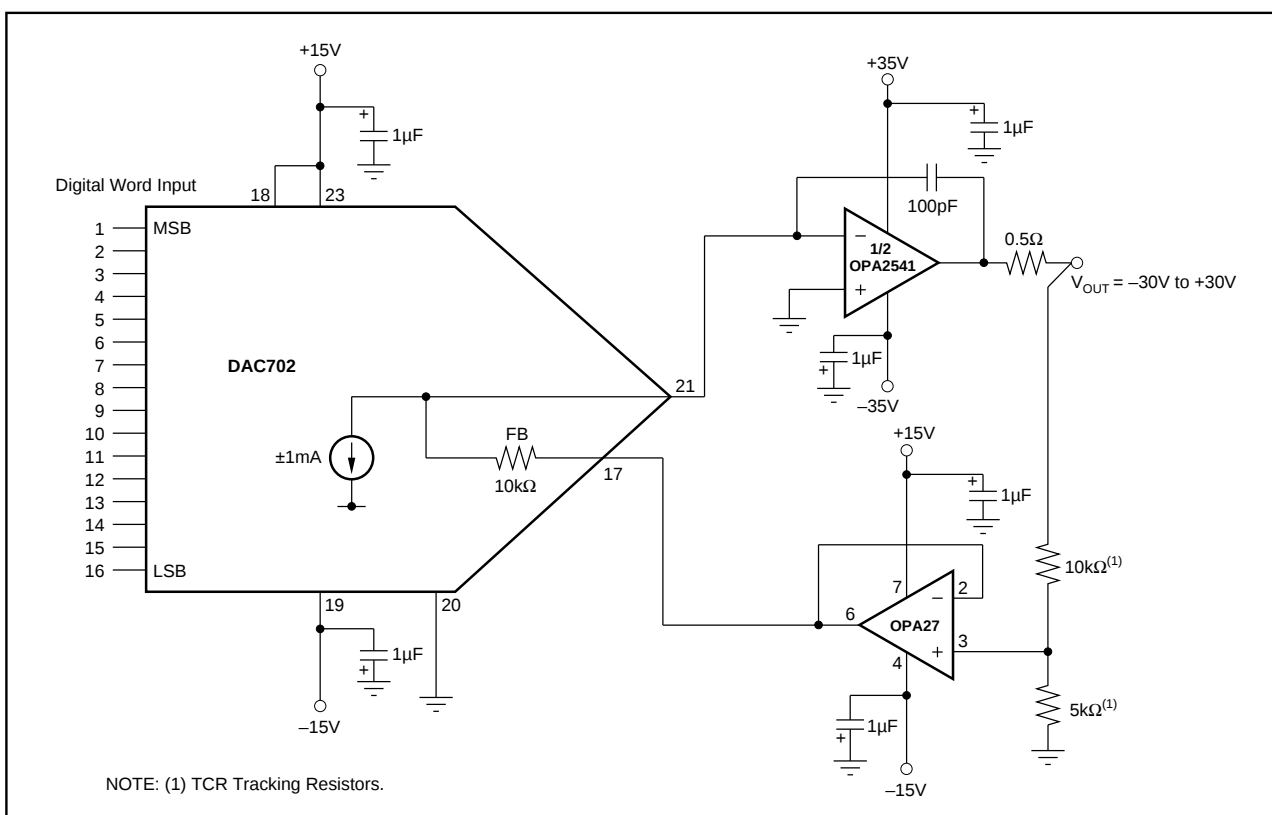


FIGURE 6. 16-Bit Programmable Voltage Source.

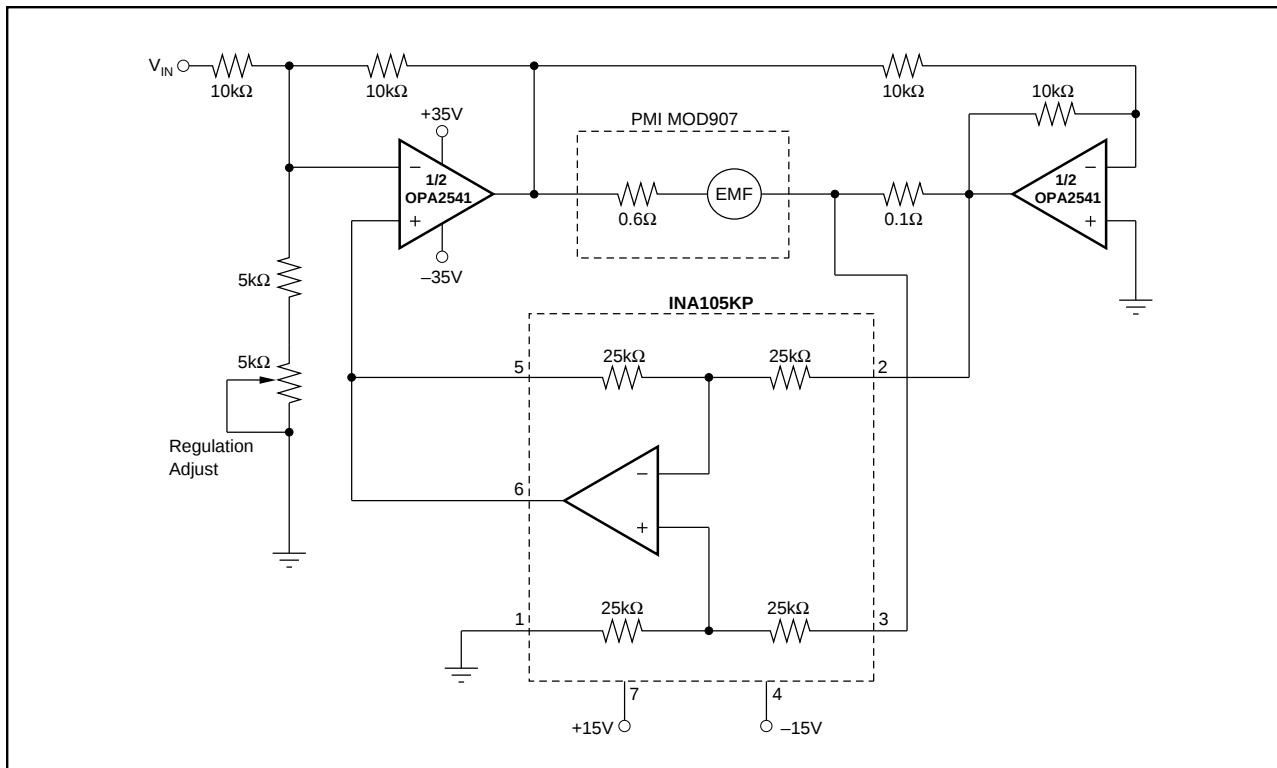


FIGURE 7. Bridge Amplifier Motor-Speed Controller.

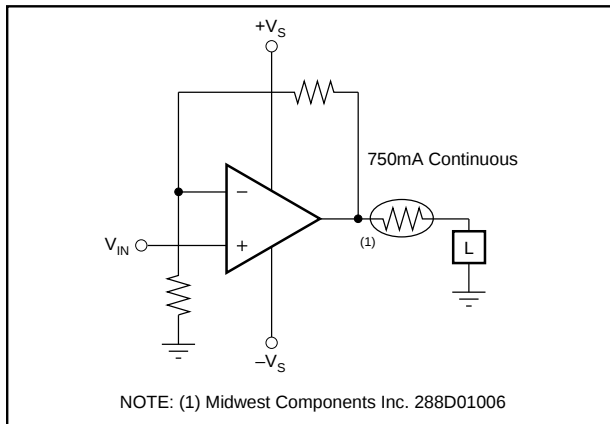


FIGURE 8. Limiting Output Current.

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.