

# OPEN CIRCUITS

2.9mm

DC - 40 GHz

50 Ohms



MODELS: 7041, 7042

## SPECIFICATIONS:

### Electrical:

Frequency Range \_\_\_\_\_ DC - 40 GHz  
Impedance \_\_\_\_\_ 50 Ohms  
Reflection \_\_\_\_\_ 100% Nominal


### Mechanical:

Connectors \_\_\_\_\_ Passivated Stainless Steel


Mates Electrically & Mechanically  
with all SMA, K & 3.5mm Series Connectors

Conductors \_\_\_\_\_ Gold Plated Beryllium Copper

Model Number: 7041  
2.9mm Male

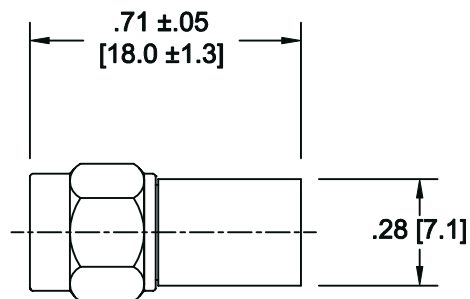

Model Number: 7042  
2.9mm Female

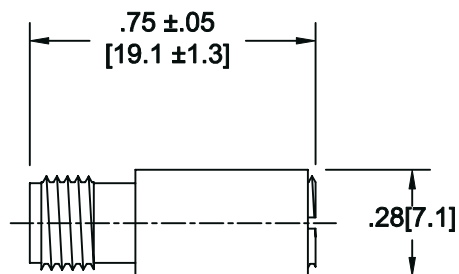

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

7041-OPN; REV B