

PC816 Series

High Collector-emitter Voltage, High Density Mounting Type Photocoupler


✳ Lead forming type (I type) and taping reel type (P type) are also available. (PC816I/PC816P)

■ Features

1. High collector-emitter voltage (V_{CEO} : 70V)
2. Compact dual-in-line package
PC816 : 1-channel type
PC826 : 2-channel type
PC846 : 4-channel type
3. High isolation voltage between input and output (V_{ISO} : 5 000V_{rms})
4. Current transfer ratio
(CTR : MIN. 50% at $I_F = 5\text{mA}$, $V_{CE} = 5\text{V}$)
5. Recognized by UL, file No. E64380

■ Outline Dimensions

(Unit : mm)

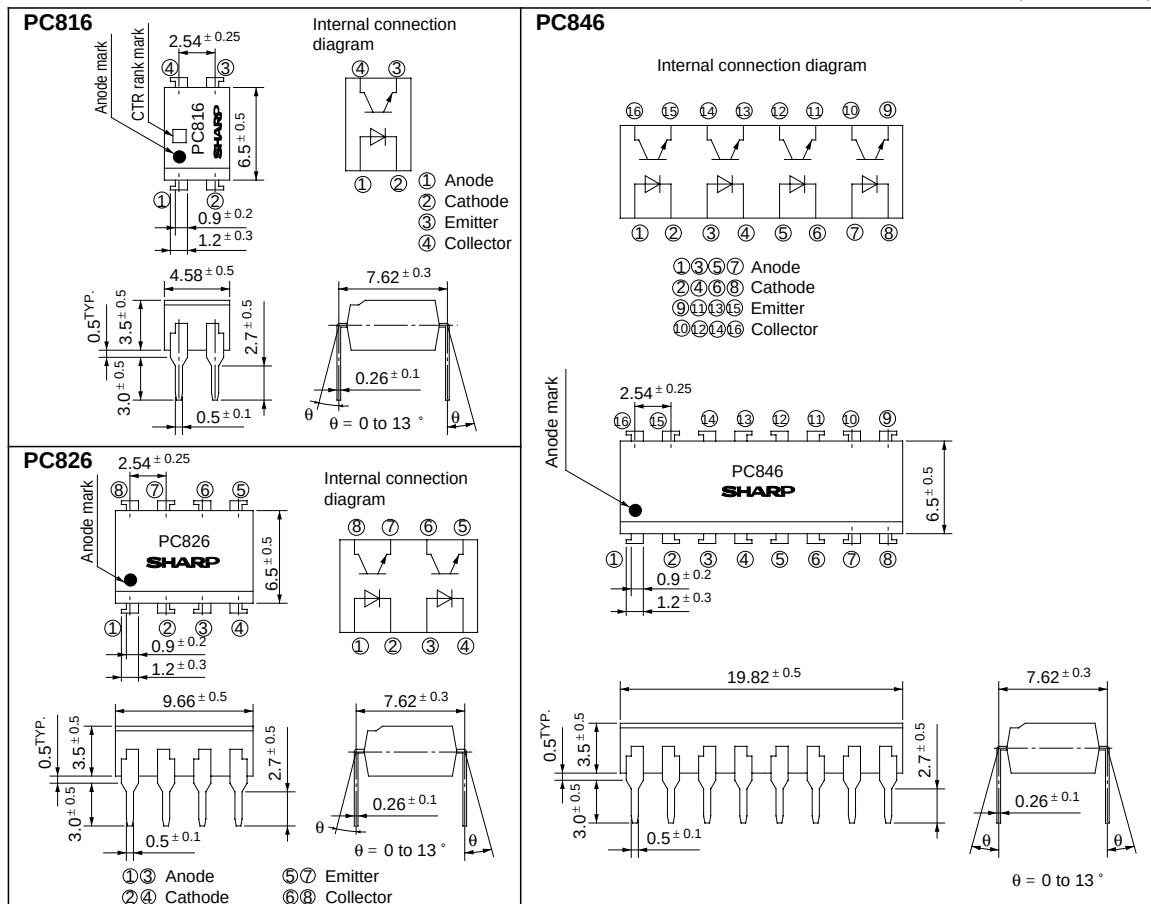

Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	*1 Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V_{CEO}	70	V
	Emitter-collector voltage	V_{ECO}	6	V
	Collector current	I_C	50	mA
	Collector power dissipation	P_C	150	mW
Total power dissipation		P_{tot}	200	mW
*2 Isolation voltage		V_{iso}	5 000	V_{rms}
Operating temperature		T_{opr}	- 30 to + 100	°C
Storage temperature		T_{stg}	- 55 to + 125	°C
*3 Soldering temperature		T_{sol}	260	°C

*1 Pulse width ≤ 100μs, Duty ratio : 0.001

*2 40 to 60% RH, AC for 1 minute

*3 For 10 seconds

Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit		
Input	Forward voltage	V _F	I _F = 20mA	-	1.2	1.4	V		
	Peak forward voltage	V _{FM}	I _{FM} = 0.5A	-	-	3.0	V		
	Reverse current	I _R	V _R = 4V	-	-	10	μ A		
	Terminal capacitance	C _t	V = 0, f= 1kHz	-	30	250	pF		
Output	Collector dark current	I _{CEO}	V _{CE} = 20V, I _F = 0	-	-	10 ⁻⁷	A		
Transfer charac- teristics	*4Current transfer ratio		CTR	I _F = 5mA, V _{CE} = 5V	50	-	600	%	
	Collector-emitter saturation voltage		V _{CE(sat)}	I _F = 20mA, I _C = 1mA	-	0.1	0.2	V	
	Isolation resistance		R _{ISO}	DC500V, 40 to 60% RH	5 x 10 ¹⁰	10 ¹¹	-	Ω	
	Floating capacitance		C _f	V = 0, f= 1MHz	-	0.6	1.0	pF	
	Cut-off frequency		f _c	V _{CE} = 5V, I _C = 2mA, R _L = 100 Ω, - 3dB	-	80	-	kHz	
	Response time		Rise time	t _r	V _{CE} = 2V, I _C = 2mA R _L = 100 Ω		-	4	18
Fall time			t _f	-			3	18	μ s

*4 Classification table of current transfer ratio is shown below.

Model No.	Rank mark	CTR (%)
PC816A	A	80 to 160
PC816B	B	130 to 260
PC816C	C	200 to 400
PC816D	D	300 to 600
PC816AB	A or B	80 to 260
PC816BC	B or C	130 to 400
PC816CD	C or D	200 to 600
PC816AC	A, B or D	80 to 400
PC816BD	B, C or D	130 to 600
PC816AD	A, B, C or D	80 to 600
PC816	A, B, C, D or No mark	50 to 600

Fig. 1 Forward Current vs. Ambient Temperature

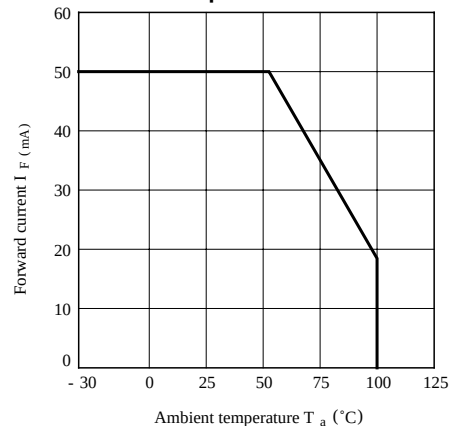


Fig. 2 Collector Power Dissipation VS. Ambient Temperature

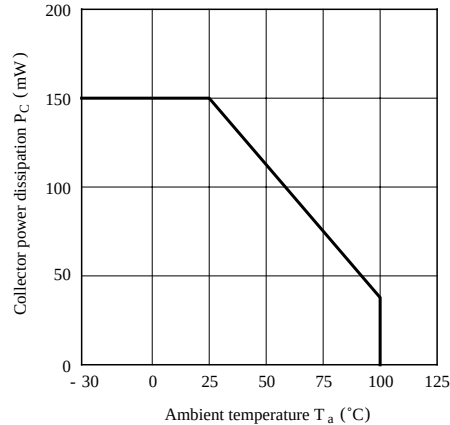


Fig. 3 Peak Forward Current vs. Duty Ratio

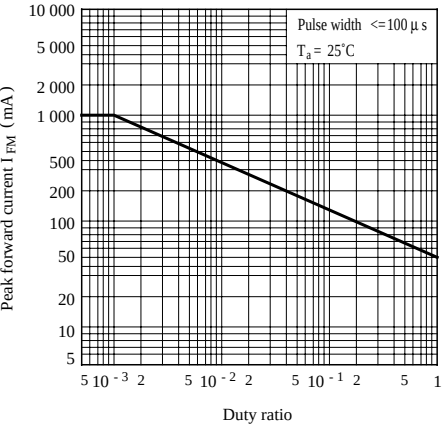


Fig. 4 Forward Current vs. Forward Voltage

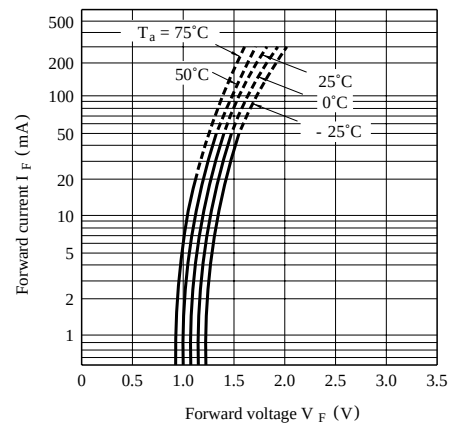


Fig. 5 Current Transfer Ratio vs. Forward Current

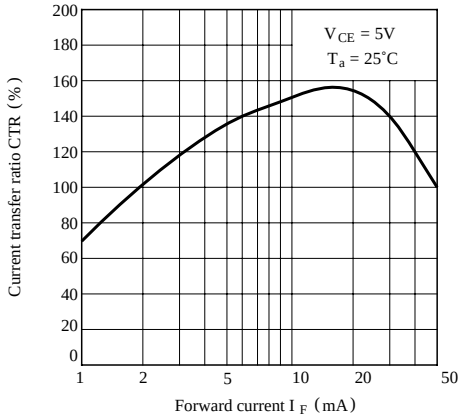


Fig. 6 Collector Current vs. Collector-emitter Voltage

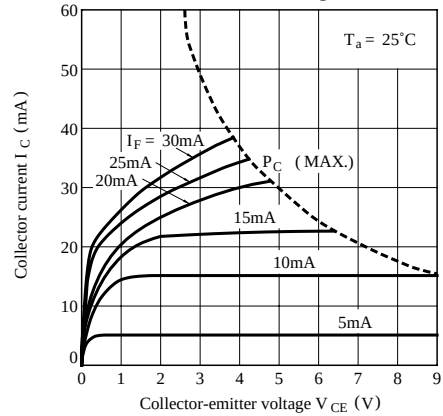


Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature

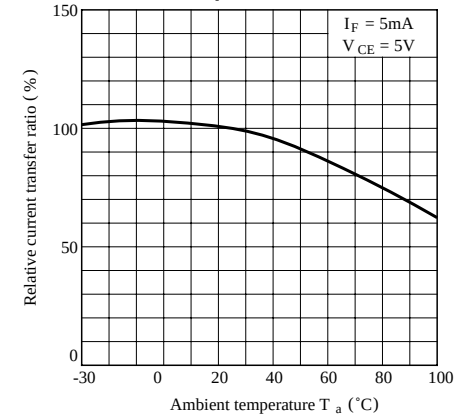


Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature

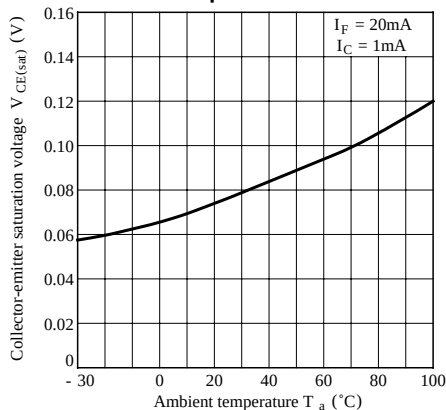


Fig. 9 Collector Dark Current vs. Ambient Temperature



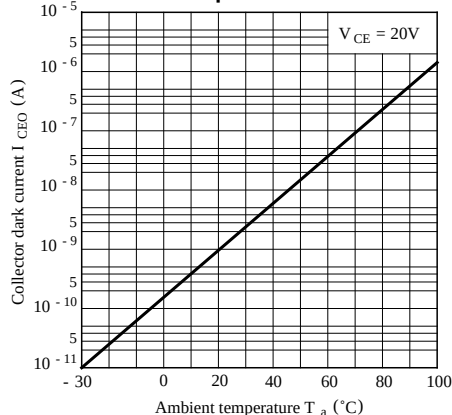


Fig.10 Response Time vs. Load Resistance

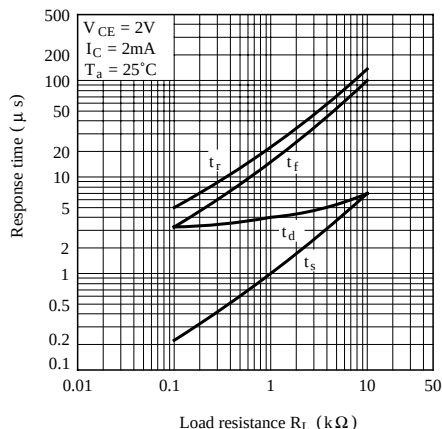

Test Circuit for Response Time

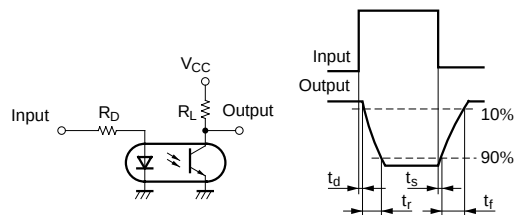

Test Circuit for Frequency Response




Fig.11 Frequency Response


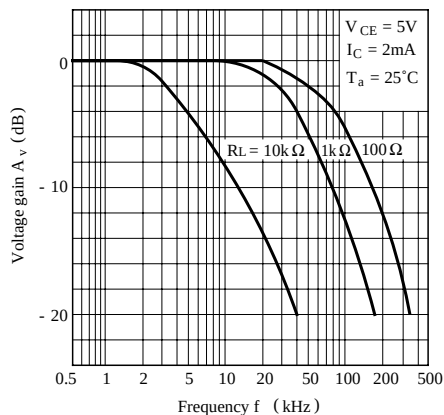


Fig.12 Collector-emitter Saturation Voltage vs. Forward Current

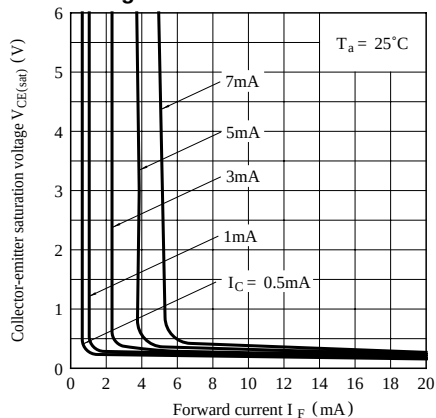

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.