

LOW CAPACITANCE STEERING DIODE & TVS ARRAYS

APPLICATIONS

- ✓ Ethernet - 10/100 Base T
- ✓ Computer I/O Ports- SCSI, FireWire & USB
- ✓ Set Top Box Protection

IEC COMPATIBILITY (EN61000-4)


- ✓ 61000-4-2 (ESD): Air - 15kv, Contact - 8kv
- ✓ 61000-4-4 (EFT): 40A - 5/50ns
- ✓ 61000-4-5 (Surge): 24A, 8/20 μ s - Level 2(Line-Gnd) & Level 3(Line-Line)

FEATURES


- ✓ 500 Watts Peak Pulse Power Dissipation($t_p = 8/20\mu$ s)
- ✓ Bidirectional Configuration
- ✓ Available in 3.3V & 5V
- ✓ Protects Up to Six (6) I/O Ports
- ✓ ESD Protection > 40 kilovolts
- ✓ **LOW CAPACITANCE -15pF**

MECHANICAL CHARACTERISTICS

- ✓ Molded JEDEC SO-8
- ✓ Weight 15 milligrams (Approximate)
- ✓ Flammability Rating UL 94V-0
- ✓ 12mm Tape and Reel Per EIA Standard 481-1-A
- ✓ Device Marking Code & Logo
- ✓ Pin 1 Indicated By Dot on Package

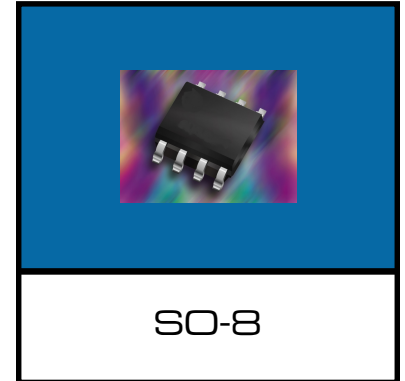

CIRCUIT DIAGRAM

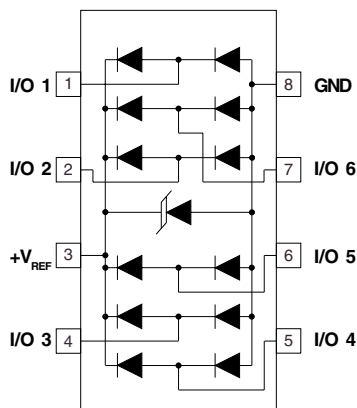

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Operating Temperature	T_J	-55°C to 150°C	°C
Storage Temperature	T_{STG}	-55°C to 150°C	°C
Maximum Forward Voltage @ 100 mA (See Note 1)	V_F	1.1	Volts

Note 1: Measured between pins 8 to 1, 2, 3, 4, 5, 6, or 7.

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (See Note 1)	DEVICE MARKING	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $I_P = 1A$ V_C VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ 8/20 μs V_C @ I_{PP}	MAXIMUM LEAKAGE CURRENT @ V_{WM} I_D μA	MAXIMUM CAPACITANCE (See Note 2) (See Figure 5) 0V @ 1 MHz C pF
PSRDA3.3-6	SGG	3.3	4.0	6.5	10.9V @ 43.0A	125	15
PSRDA05-6	SGH	5.0	6.0	9.8	13.5V @ 42.0A	20	15

Note 1: Spice model and parameters for this series are available on the ProTek Devices web site: www.protekdevices.com.

Note 2: Capacitance measured at $V_{WM} = V_{CC}$ connected between I/O pins to pin 8(Gnd). $V_R = V_{WM}$ @ 1MHz. As shown in Figure 5, REF1 is connected to ground, REF2 is connected to $+V_{CC}$, and input applies to $V_{CC} = 5V$, $V_{sign} = mV$, $F = 1$ MHz.

FIGURE 1
PEAK PULSE POWER VS PULSE TIME







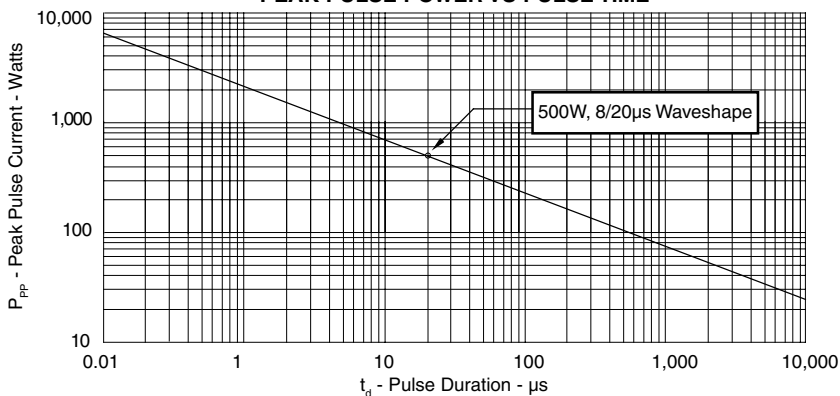


FIGURE 2
PULSE WAVE FORM

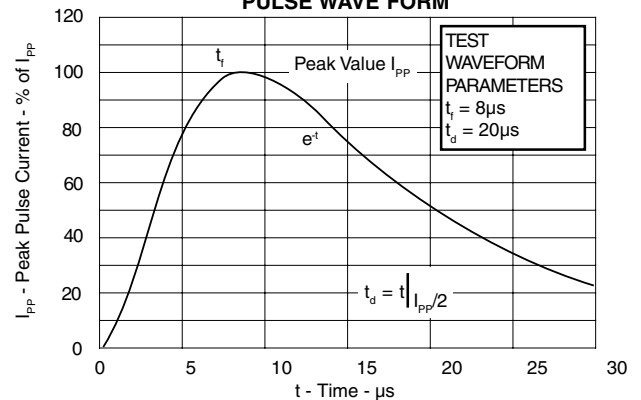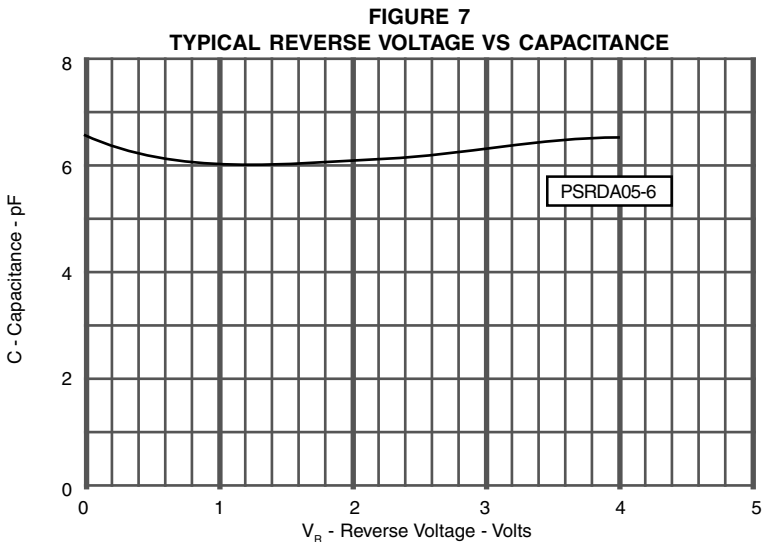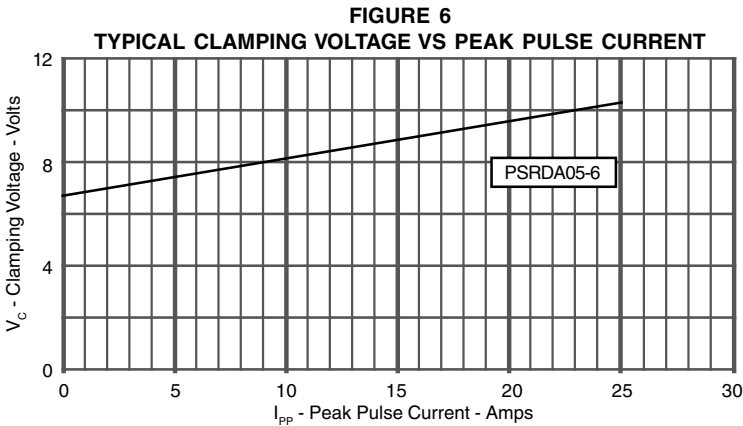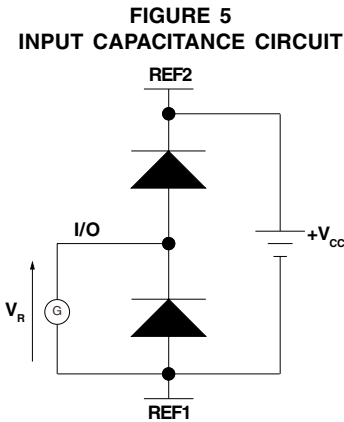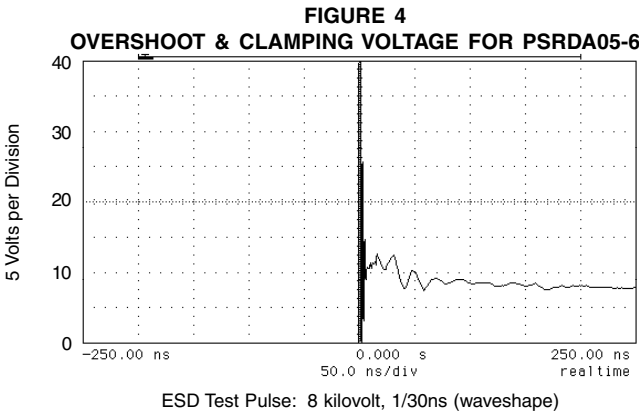

GRAPHS

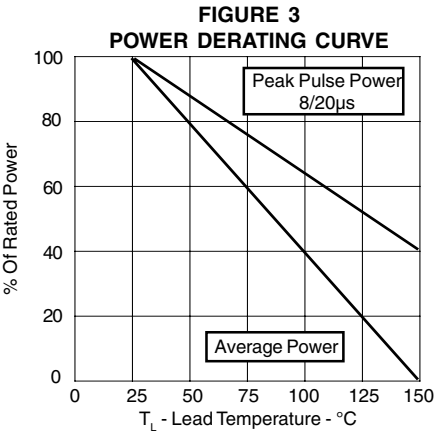

APPLICATION NOTE

The PSRDAxx-6 Series are low capacitance, bidirectional TVS arrays that are designed to protect I/O or high speed data lines from the damaging effects of ESD or EFT. This product series has a surge capability of 500 Watts P_{PP} per line for an 8/20 μ s waveshape and offers ESD protection > 40kv.

DIFFERENTIAL MODE CONFIGURATION (Figure 1)

Ideal for use in USB applications, the PSRDAxx-6 Series provides up to six (6) lines of protection in a differential mode configuration as depicted in Figure 1.

Circuit connectivity is as follows:

- ✓ Pins 1, 2, 4, 5, 6 and 7 are connected to the datalines.
- ✓ Pin 8 is connected to ground.
- ✓ Pin 3 is connected to the databus.

CIRCUIT BOARD LAYOUT RECOMMENDATIONS

Circuit board layout is critical for Electromagnetic Compatibility (EMC) protection. The following guidelines are recommended:

- ✓ The protection device should be placed near the input terminals or connectors, the device will divert the transient current immediately before it can be coupled into the nearby traces.
- ✓ The path length between the TVS device and the protected line should be minimized.
- ✓ All conductive loops including power and ground loops should be minimized.
- ✓ The transient current return path to ground should be kept as short as possible to reduce parasitic inductance.
- ✓ Ground planes should be used whenever possible. For multilayer PCBs, use ground vias.


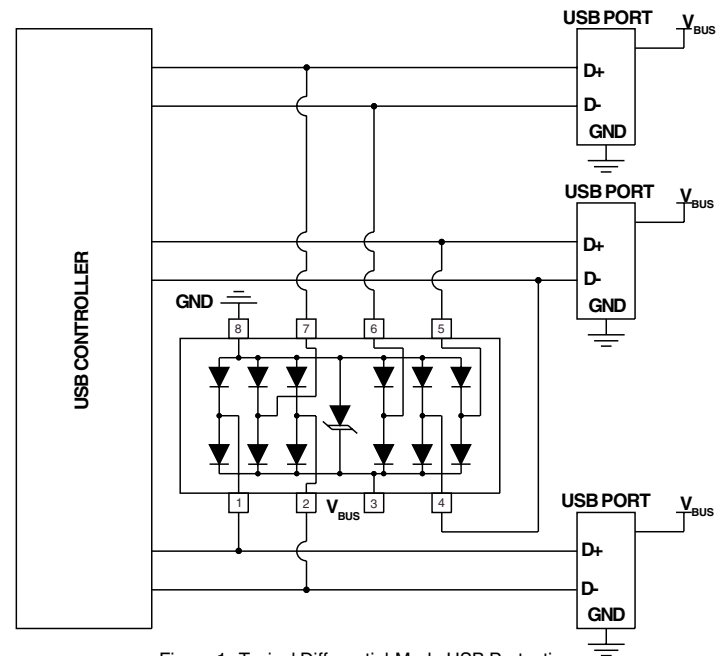


Figure 1. Typical Differential-Mode USB Protection

PACKAGE OUTLINE & DIMENSIONS

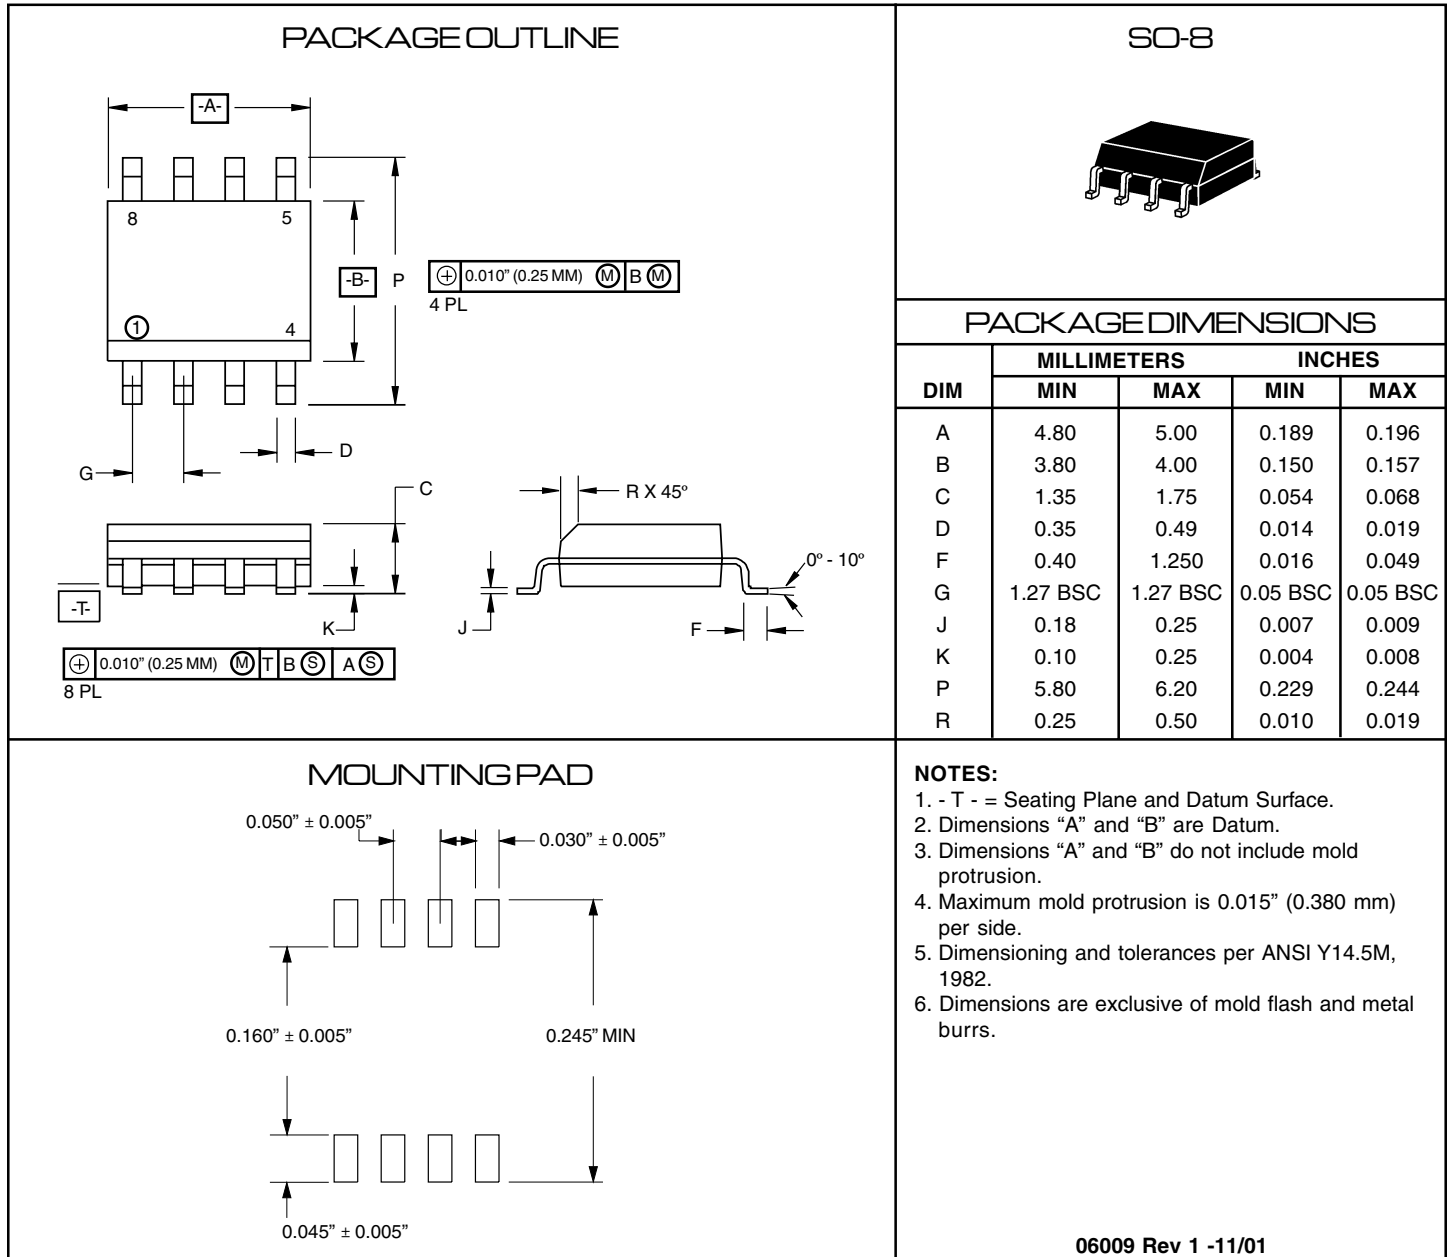

TAPE & REEL PACKAGING:

Surface mount product is taped and reeled in accordance with EIA-481, reel quantities and sizes are as follows:

7 Inch Reel - 1,000 pieces per reel; 13 Inch Reel - 2,500 pieces per reel

COPYRIGHT © ProTek Devices 2001

SPECIFICATIONS: ProTek reserves the right to change the electrical and/or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices

2929 South Fair Lane, Tempe, AZ 85282

Tel: 602-431-8101 Fax: 602-431-2288

E-Mail: sales@protekdevices.com

Web Site: www.protekdevices.com