

RX192AW PIN Receiver Module

Optical receiver “front end” module which may be optimized for low OSNR applications or for up to 12.5Gb/s operation. **NOTE:** This is a single, not differential, output device.




Features:

May 2002

- RX192AW: A member of the Multiplex Receiver Family of APDs, PINs, single and differential output products: Optical receiver module including PIN diode and high gain, low noise TIA in a small form factor, low profile package optimized for **Low OSNR** applications “or” **High Sensitivity** 12.5 Gb/s operation.
- Low power consumption.
- **SINGLE OUTPUT ONLY**. Although the leads are configured as a differential package, this module has been modified to be single output only.
- Eliminates RF connector.
- Non-inverted, AC-coupled or DC coupled output.
- Case Operational Temperature: -20°C to + 70°C.

PIN

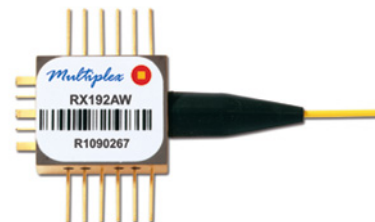

Performance Specifications

Parameters	Unit	Worst Case	Typ	Best Case	Comments/Test Conditions
* Receiver Sensitivity ¹	dBm	-19	-20	-	10 Gb/s. BER at 1×10^{-10} . $\lambda = 1.5 \mu\text{m}$
* Maximum operational optical input power	dBm	+2	-	-	$\lambda = 1.5 \mu\text{m}$; error free operation, at Room Temperature. BER $< 10^{-14}$

Parameters	Unit	Min	Typ	Max	Comments/Test Conditions
* PIN responsivity	A/W	0.75	> 0.8	-	$\lambda = 1.5 \mu\text{m}$
Receiver transimpedance gain	Ω	500	-	-	
Receiver 3dB Bandwidth	GHz	9	9.5	-	Small signal frequency response
Receiver low frequency cutoff (3dB)	kHz	-	< 50	100	-20°C to +70°C
Receiver transfer function phase linearity deviation	degree	-	< 10	20	
Receiver transfer function amplitude peaking	dB	-	< 1	1.5	(100 kHz to 9GHz)
* Input optical reflectance ²	dB	-	-	-27	For $\lambda = 1.3 \mu\text{m}$ and $1.5 \mu\text{m}$; excluding reflection from optical connector.
Output maximum electrical return loss (S22)	dB	-	-15	-10	50 kHz to 10 GHz
Total Power consumption	mW	-	-	500	

* Measured on every device.

¹ A BER Plot is provided with every device.


² Screened on every device.


DC Operating Characteristics (RX192AW):

Parameters	Unit	Min	Typ	Max	Current (mA; Max)
PIN diode bias (Note-1)	V	+3.3	+5	+10	-
Positive receiver module bias	V	+3.0	+3.3	+3.6	110
Negative receiver module bias	V	-2.4	-2.2	-2.0	50

Note-1. All tests were performed with 5V reverse bias for the PIN photo diode. Increasing the PIN reverse bias will, in general, enhance the receiver sensitivity slightly. Higher reverse bias voltage tends to increase the dark current slightly, however, this increase should not cause any receiver sensitivity degradation.

Schematic of the RX 192AW

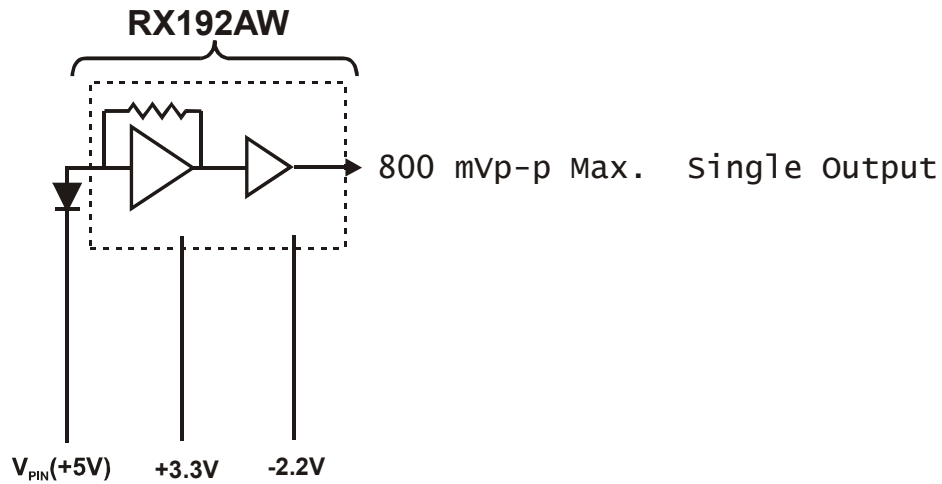

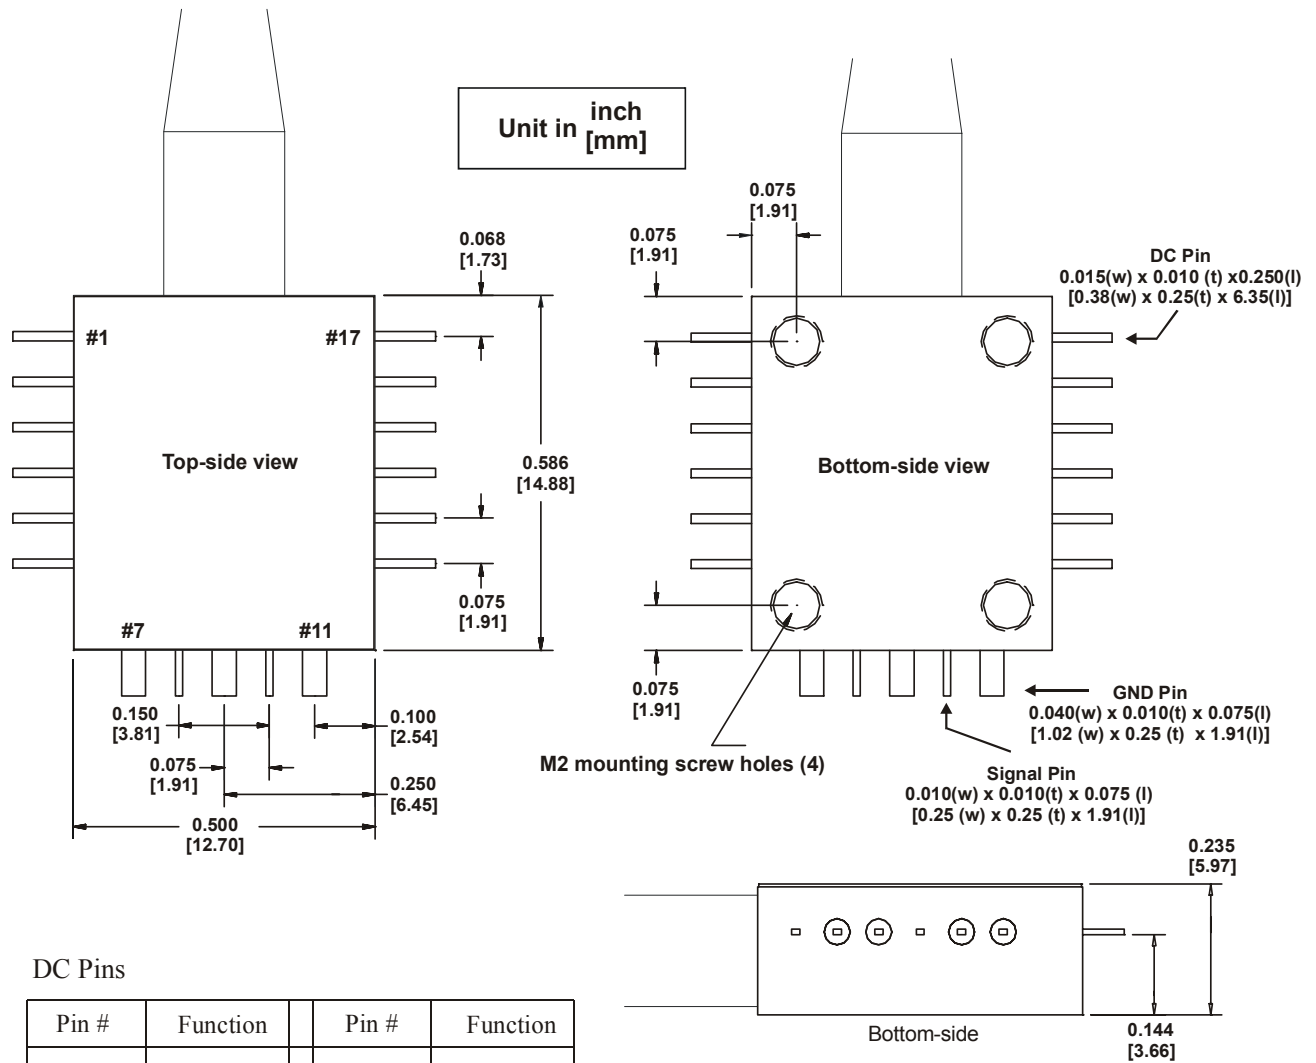

DC Pins

Pin #	Function	Pin #	Function
1	GND	17	GND
2	V_PD	16	NC
3	-2.2V	15	+3.3V
4	GND	14	GND
5	NC	13	NC
6	NC	12	NC

RF OUTPUT PINS:

Pin #	7	8	9	10	11
Function	GND	NC	GND	Q	GND

RX192AW Optical Receiver Package

Ordering Code Options for PIN Receiver Product Family:

Part Number Description	Output Coupling		Connector						Fiber Lengths (meters)			Low Optical Signal to Noise Optimization (with W versions only)
	AC	DC	Electrical			Optical			0.6	1.0	1.5	
Ordering Symbol	XA	XD	S (SMA)	G (GPO, Standard)	K	SC	FC	LC	06	10	15	- O
MTRX192AR RF Connector Pkg, Single Analog Output, High Sensitivity	X	X	X	X	X	X	X	X	X	X	X	
MTRX192AW RF Connector Pkg., Single Analog Output, Low OSNR or 12.5 Gb/s	X	X	X	X	X	X	X	X	X	X	X	X
MTRX192L RF Connector Pkg., Single Digital Output, High Sensitivity	X	X	X	X	X	X	X	X	X	X	X	
MTRX192LW RF Connector Pkg., Single Digital Output, Low OSNR or 12.5 Gb/s	X	X	X	X	X	X	X	X	X	X	X	X
RX192DA Coplanar Pkg., Differential, Analog Output	X	X	-	-	-	X	-	X	*	*	-	
RX192AW Coplanar-Differential Pkg., Single Analog Output, Low OSNR or 12.5 Gb/s	X	X	-	-	-	X	-	X	*	*	-	X
RX192DL Coplanar Pkg., Differential, Digital Output	X	X	-	-	-	X	-	X	*	*	-	
RX192DLW Coplanar Pkg., Differential, Digital Output, Low OSNR or 12.5 Gb/s	X	X	-	-	-	X	-	X	*	*	-	X

*The LC-connectorized pigtail on these packages is offered with a 0.6 meter pigtail length.

*The SC-connectorized pigtail on these packages is offered with a 1.0 meter pigtail length

The following examples are given for ease of ordering:

Example 1: For a PIN receiver in a coplanar package, with differential digital output, AC coupled and LC optical connector (0.6 meter pigtail length only) for high sensitivity 10Gb/s applications:

Multiplex Ordering Code: RX192DLXASC06

Example 2: For a PIN receiver in an RF-connector package, with a single analog output, DC coupled, GPO electrical connector, SC optical connector (1 meter fiber pigtail only) and optimized for low OSNR (10 Gb/s) applications:

Multiplex Ordering Code: MTRX192AWXDGSC10-O

Example 3: For a PIN receiver in a coplanar package, with differential digital output, DC coupled, SC optical connector (1 meter fiber pigtail only), and optimized for 12.5 Gb/s applications:

Multiplex Ordering Code: RX192DLWXDSC10

For Product Inquiries please contact:

Phil Altieri
Customer Marketing Engineer
Multiplex, Inc.
5000 Hadley Ave.
South Plainfield, New Jersey 07080
USA
(908) 757-8817 x6214