

## Technical Specification for Optical Transceiver Module

### SDM7302-XC

<input checked="" type="checkbox"/> 155.52Mb/s	<input type="checkbox"/> 622.08Mb/s	<input type="checkbox"/> other _____
<input checked="" type="checkbox"/> Short Haul	<input type="checkbox"/> Long Haul	<input type="checkbox"/> other _____
<input checked="" type="checkbox"/> Intermediate Reach	<input type="checkbox"/> Long Reach	<input type="checkbox"/> other _____
<input checked="" type="checkbox"/> Single 5.0 V	<input type="checkbox"/> Single 3.3 V	<input type="checkbox"/> other _____
<input checked="" type="checkbox"/> 1.3 $\mu$ m	<input type="checkbox"/> 1.55 $\mu$ m	<input type="checkbox"/> other _____
<input type="checkbox"/> Transmitter	<input type="checkbox"/> Receiver	<input checked="" type="checkbox"/> Transceiver
	( <input type="checkbox"/> 2R / <input type="checkbox"/> 3R )	( <input type="checkbox"/> 2R / <input checked="" type="checkbox"/> 3R )



Sumitomo Electric reserves the right to make changes in this specification without prior notice.

**#Safety Precaution**    **Symbols** This specification uses various picture symbols to prevent possible injury to operator or other persons or damage to properties for appropriate use of the product. The symbols and definitions are as shown below. Be sure to be familiar with these symbols before reading this specification.

	<b>Warning</b> Wrong operation without following this instruction may lead to human death or serious injury.
	<b>Caution</b> Wrong operation without following this instruction may lead to human injury or property damage.

Example of picture symbols



indicates prohibition of actions. Action details are explained thereafter.



indicates compulsory actions or instructions. Action details are explained thereafter.

(SDM7302-XC)

## 1. General

SDM7302-XC is a series of compact and high speed performance digital optical transceiver module ideally designed for versatile high speed network applications. 1300nm high speed InGaAsP FP-LD and InGaAs PIN-PD are provided as a light source and a detector, respectively. Transceiver module has PC board mountable package with electrical and optical interfaces.

* Data Rate	622.08 Mbps, NRZ
* Duty Cycle	50%
* Power Supply Voltage	Single+5V
* Electrical Interface	PECL
* Fiber Coupled Power	-8 ~ -15dBm (Typ. -11dBm) for SMF
* Sensitivity	-8 ~ -28dBm (Typ. -33dBm)
* Connector Interface	SC Duplex Connector

The features of SDM7302-XC are listed below.

* Features	Low Power Consumption Plastic Molded Package Multi-sourced Footprint
Transmitter.....	Uncooled FP-LD with Automatic Power Control IC Optical Output Shut-down ( Disable ) Laser Bias Current Monitor / Rear Facet Monitor Class 1 Laser Product (IEC 825-1 and FDA 21 CFR 1040.10 and 1040.11)
Receiver.....	Wide Dynamic Range Built-in Clock Recovery (including SAW filter) ITU-T G.957 / G.958 and Bellcore TA-NWT-000253 Compliant Signal Detect (FLAG) Function

## 2. Block Diagram

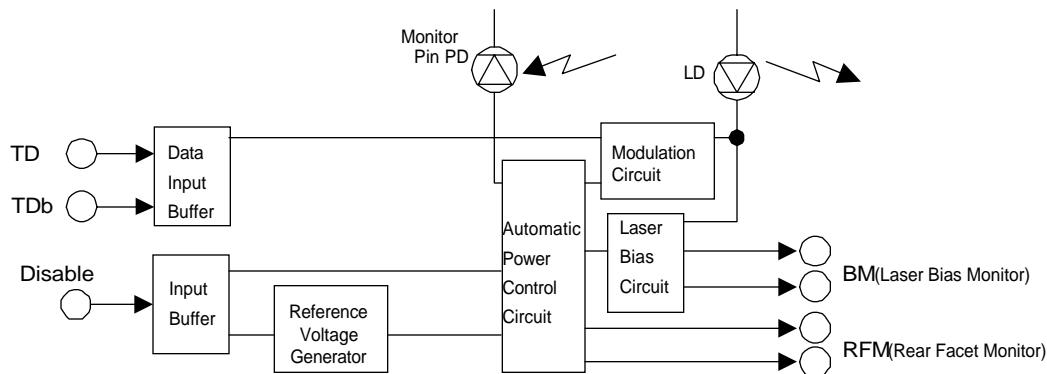


Figure 1-1. Block Diagram (Transmitter)

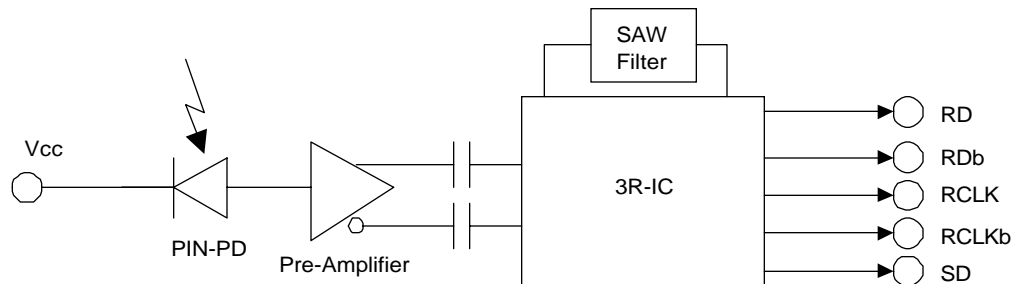


Figure 1-2 Block Diagram (Receiver)

### 3. Package Dimension

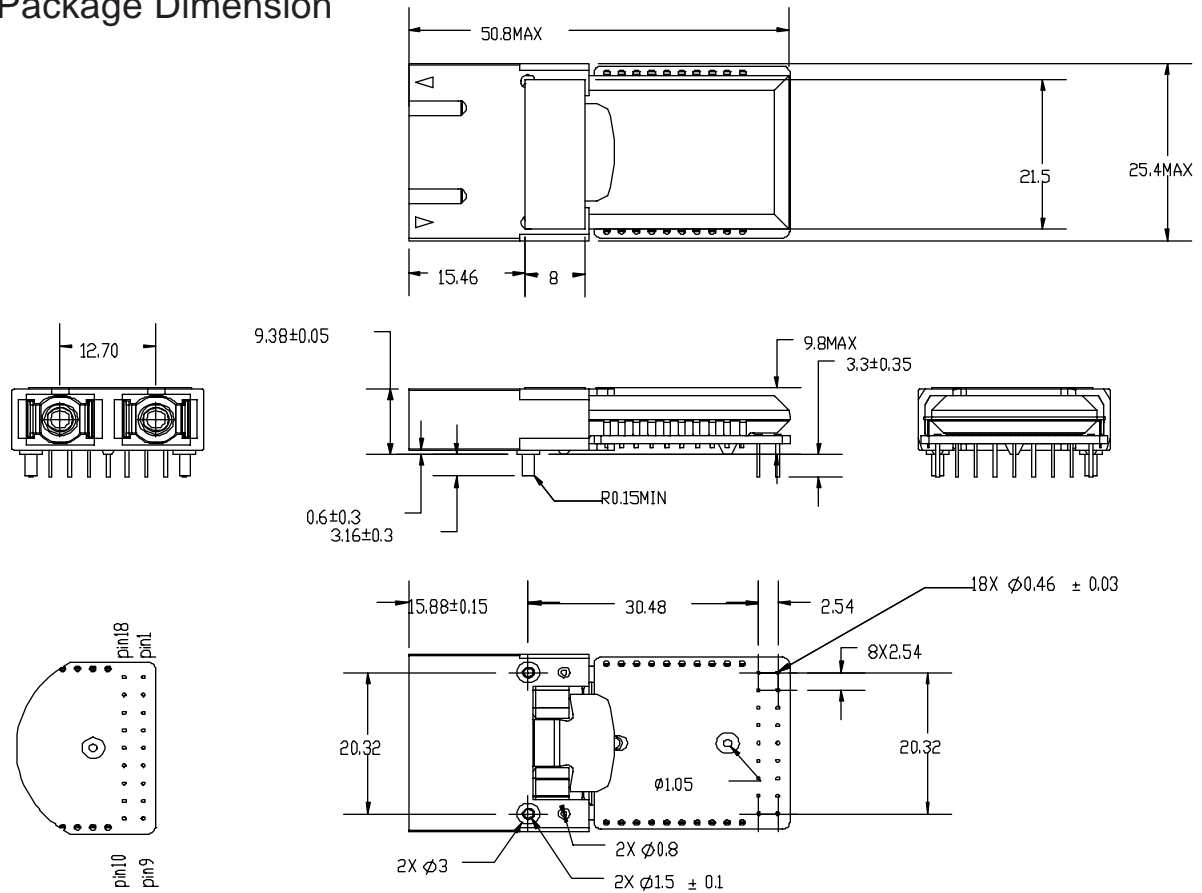


Figure 2. Package Dimension

### ⚠ Caution



Do not disassemble this product. Otherwise, failure, electrical shock, overheating or fire may occur.

Handle the lead pins carefully. Use assisting tools or prospective aids as required. A lead pin may injure skin or human body

### 4. Pin Assignment

No.	Symbol	Function
1	N/C	Non Connection (Internally)
2	N/C	Non Connection (Internally)
3	RCLKb	Differential Clock Output (Negative)
4	RCLK	Differential Clock Output (Positive)
5	BM(-)	Monitoring pin for LD Bias Monitor
6	BM(+)	Monitoring pin for LD Bias Monitor
7	Disable	LD Disable Input
8	RFM(+)	Monitoring pin for Rear Facet Monitor
9	RFM(-)	Monitoring pin for Rear Facet Monitor
10	Veetx	Power Supply (-) for Transmitter : Connected to GND
11	TD	Transmitter Differential Data (Positive)
12	TDb	Transmitter Differential Data (Negative)
13	Vcctx	Power Supply (+) for Transmitter : Connected to +3.3V
14	Vccrx	Power Supply (+) for Receiver : Connected to +3.3V
15	FLAG(SD)	FLAG (Signal Detect)
16	RDb	Received Differential Data (Negative)
17	RD	Received Differential Data (Positive)
18	Veerx	Power Supply (-) for Receiver : Connected to GND

NC pins should left open for additional functions in the future

## 5. Absolute Maximum Ratings

Parameter	Symbol	min.	Max	Unit	Note
Storage Case Temperature	Ts	-40	85	°C	1, 2
Operating Case Temperature	Tc	0	70	°C	1, 2, 3
		-40	85	°C	1, 2, 4
Supply Voltage	Vcc-Vee	0.0	6.0	V	5
Input Voltage	Vi	Vee	Vcc+0.5	V	6
Lead Soldering (Temperature) (Time)			260	°C	7
			10	sec.	

Note 1. No condensation allowed.

2. Don't remove or insert an optical connector except the environmental temperature at 0~70°C

3. SDM7301-XC 4. SDM7301-XC-W 5. Vcc>Vee

6. TD, TDb, Disable 7. Measured on lead pin at 2mm (0.079in.) off the package bottom

### Warning

Use the product with the rated voltage described in the specification. If the voltage exceeds the maximum rating, overheating or fire may occur.

### Caution

Do not store the product in the area where temperature exceeds the maximum rating, where there is too much moisture or dampness, where there is acid gas or corrosive gas, or other extreme conditions. Otherwise, failure, overheating or fire may occur.

## 6. Electrical Interface

( Unless otherwise specified, Vcc-Vee = 4.75 to 5.25 V and all operating temperature shall apply. )

### 6-1. Transmitter side

Parameter	Symbol	min.	Typ.	Max.	Unit	Note
Supply Voltage	Vcc-Vee	4.75	5.00	5.25	V	
Supply Current	Idtx		70	140	mA	1, 2
Input Voltage TD, TDb	High	Vih	Vcc-1.17	Vcc-0.73	V	3, 4
	Low	Vil	Vcc-1.95	Vcc-1.45		
Input Current TD, TDb	High	Iih	-10	150	μA	3, 4
	Low	Iil	-10	10		
Signal Input Rise / Fall Time				1.5	nsec.	5
Disable Input Voltage	Vdi	Vee+2.0		Vcc	V	6
Disable Input Current	Idi	-10		200	μA	6
LD Bias Monitor Voltage	Vbm	0.01		0.50	V	3, 7
Rear Facet Monitor Voltage	Vrfm	0.01		0.20	V	2, 7

Note 1. Output current is not included. 2. Measured at the bit rate of 155.52Mbps, 50% duty cycle data, 3.Vcc=+5.0V, 4.Tc=25°C, 5. 20 ~ 80%

6. The transmitter is enable as default state and requires an external voltage only to disable.

7. The Laser Bias and Rear Facet Monitor currents are calculated as ratios of the corresponding voltages to their current-sensing resistors, 10Ω and 200Ω, respectively (refer to Figure 3). Upon measuring or utilizing these values, use a device whose input impedance is high enough (>1MΩ) compared with those resistors.

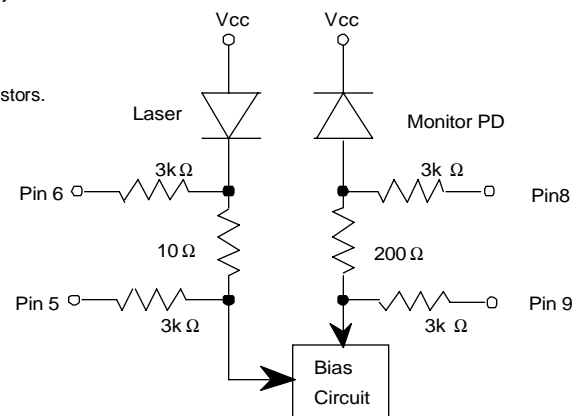


Figure 3 Monitor Circuit Schematic Diagram

### Warning

Do not connect RFM(Rear Facet Monitor) terminal to the Vee terminal, or to terminals or circuits with lower potential than the grounding potential. Overcurrent runs through the laser equipment and such strong laser beam may cause eye injury, overheating or fire.

## 6-2. Receiver side

Parameter	Symbol	min.	Typ.	Max.	Unit	Note
Supply Voltage	Vcc-Vee	4.75	5.00	5.25	V	
Supply Current	I <sub>drx</sub>		145	200	mA	1
Data, Clock & FLAG	High	V <sub>oh</sub>	V <sub>cc</sub> -1.03	V <sub>cc</sub> -0.88	V	2, 3
Output Voltage	Low	V <sub>ol</sub>	V <sub>cc</sub> -1.81	V <sub>cc</sub> -1.62	V	
Clock Rise / Fall Time	T <sub>rc</sub> / T <sub>fc</sub>			500	psec.	4, 5
Data Rise / Fall Time	T <sub>rd</sub> / T <sub>fd</sub>			700	psec.	4, 5
Clock Sampling Point	T <sub>csp</sub>	600		800	psec.	6

Note 1. Output current is not included.

2. V<sub>cc</sub>=+5.0V, T<sub>c</sub>=25°C

3. Termination condition : R<sub>l</sub>= 50Ω to V<sub>ccrx</sub> =-2V

4. 20~80%

5. Input capacitance and stray capacitance of measuring devices should be less than 2pF

6. Phase difference between rising edge of RD and rising edge of RCLK. (Please refer to Figure 4)

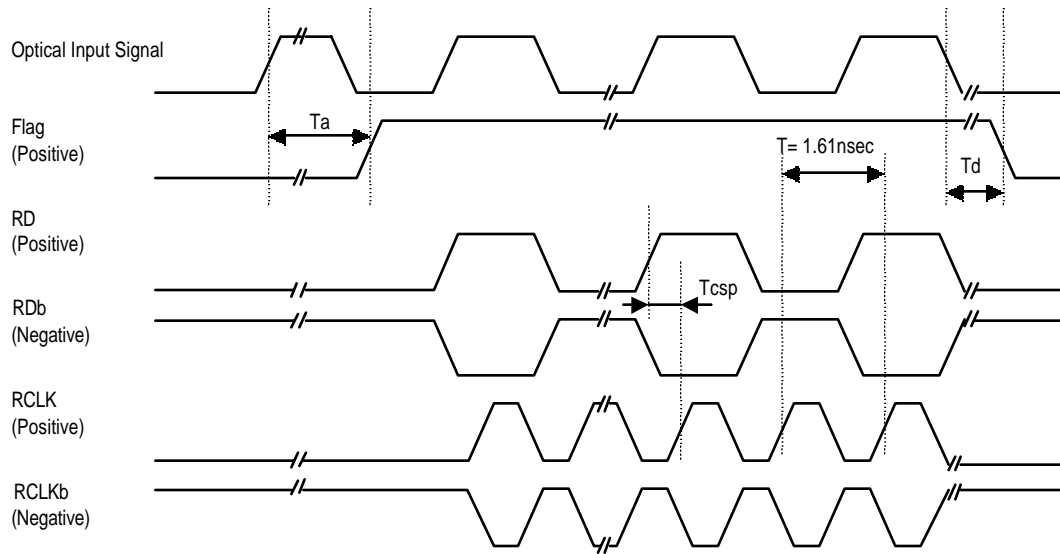


Figure 4. Timing Chart


## 7. Optical Interface

( Unless otherwise specified, Vcc-Vee = 4.75 to 5.25 V and all operating temperature shall apply. )

### 7-1. Transmitter side

Parameter	Symbol	min.	Typ.	Max.	Unit	Note
Average Output Power	Po	-15.0		-8.0	dBm	1
Extinction Ratio	Er	8.2			dB	1
Center Wavelength	$\lambda_c$	1274		1356	nm	
Spectral Width (RMS)	$\Delta\lambda$			7.7	nm	
Eye Mask for Optical Output	Refer to Figure 5					

Note 1. Measured at 155.52Mbps PRBS2<sup>23</sup>-1, 50% duty cycle data

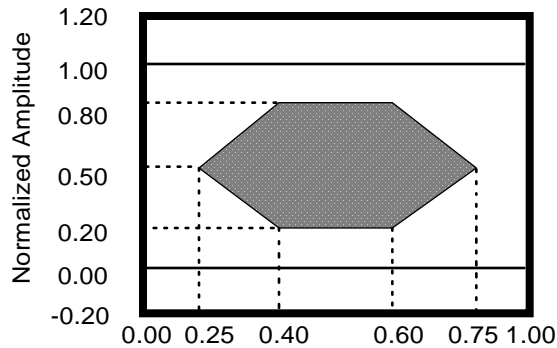

Relation between Input Signal  
and Optical Output Signal

Input Signal		Optical Output Signal
TD	TDb	
High	Low	ON (High)
Low	High	OFF (Low)
High	High	Undefined
Low	Low	Undefined

Figure 5. Optical Pulse Mask with Fourth Order  
Bessel-Thomson Filter Specified in ITU-T G.957

### Warning



Do not look at the laser beam projection area (e.g. end of optical connector) with naked eyes or through optical equipment while the power is supplied to this product. Otherwise, your eyes may be injured.

### 7-2. Receiver side

Parameter	Symbol	min.	Typ.	Max.	Unit	Note
Bit Rate Range	-	622.08 +/- 50ppm			Mbps	
Minimum Sensitivity	Pmin		-33.0	-28.0	dBm	1, 2
Overload	Pmax	-8.0			dBm	1, 2
Clock Jitter (rms)	Tjc			16	psec	2, 3, 4
Clock Duty	Cduty	45.0	50.0	55.0	%	2, 3, 4
Data Jitter (rms)	Tjd			40	psec	2, 3, 4
Consecutive Identical Digit	CID	72	100		bits	5
SD Assert Level	Pa	-48	-37	-28	dBm	2
SD deassert Level	Pd	-49	-39	-28	dBm	
SD Assert time	Ta			100	μsec	2, 3, 6
SD deassert Time	Td			100	μsec	

Note 1. BER=10<sup>-10</sup>

2. Measured at the bit rate of 622.08Mbps, PRBS 2<sup>23</sup>-1, NRZ

3. Optical Input Power: -28.0 ~ -8.0dBm

4. Termination condition for RD, RDb, RCLK, RCLKb : RI=50Ω to Vccrx-2V

5. Duty 50% input signal

6. Refer to Figure 4


## 8. Relation between Disable Input Voltage and Optical Output Power

Disable Input Voltage	Optical Output Power
"L" (0[V] ~ 0.8[V])	Enabled
"H" (2.0[V] ~ VCC <sub>TX</sub> )	Disabled (<-45dBm)


Note. Enabled for no Disable input (pin 7 opened)

## 9.Recommended Interface Circuit


Note1: This IC should be designed just before the Transmitter input Terminals to reduce input signal's jitter.

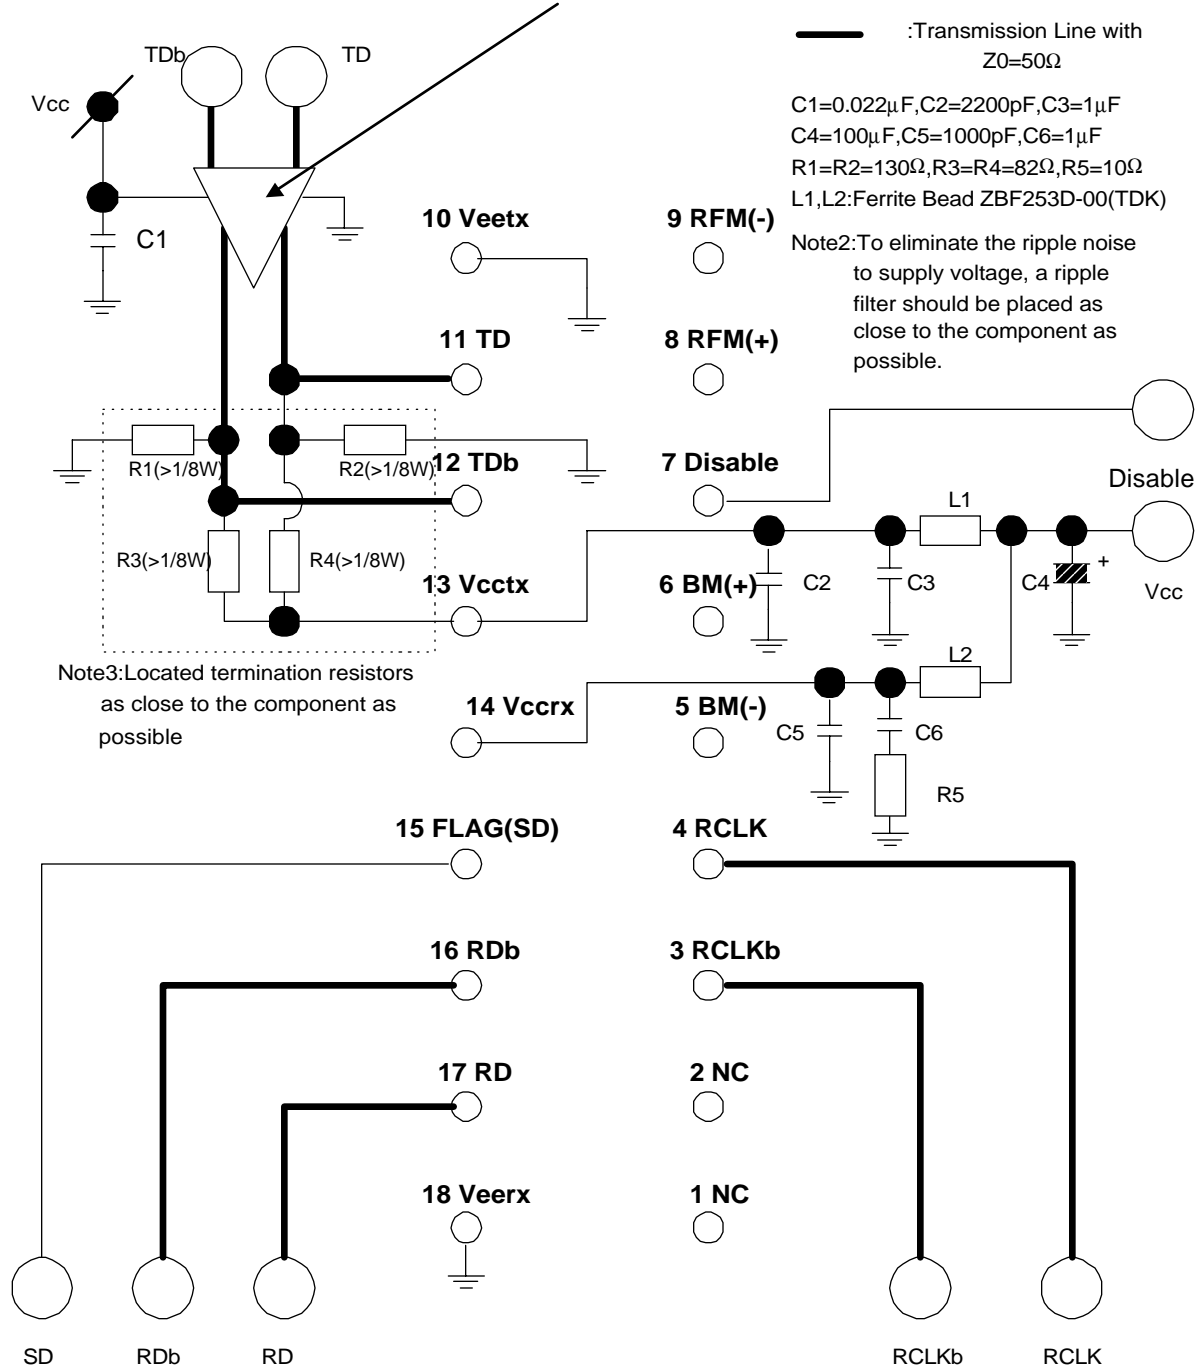

Output signal (RD, RDb, RCLK, RCLKb) are open emitter, so terminated condition as follows

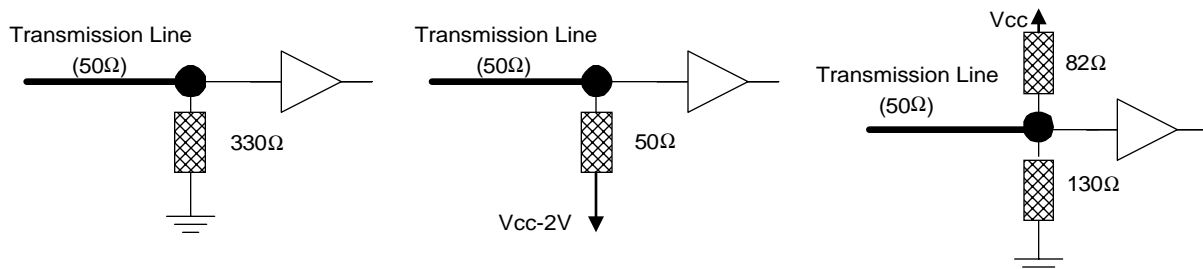

## 10. Characteristic Information

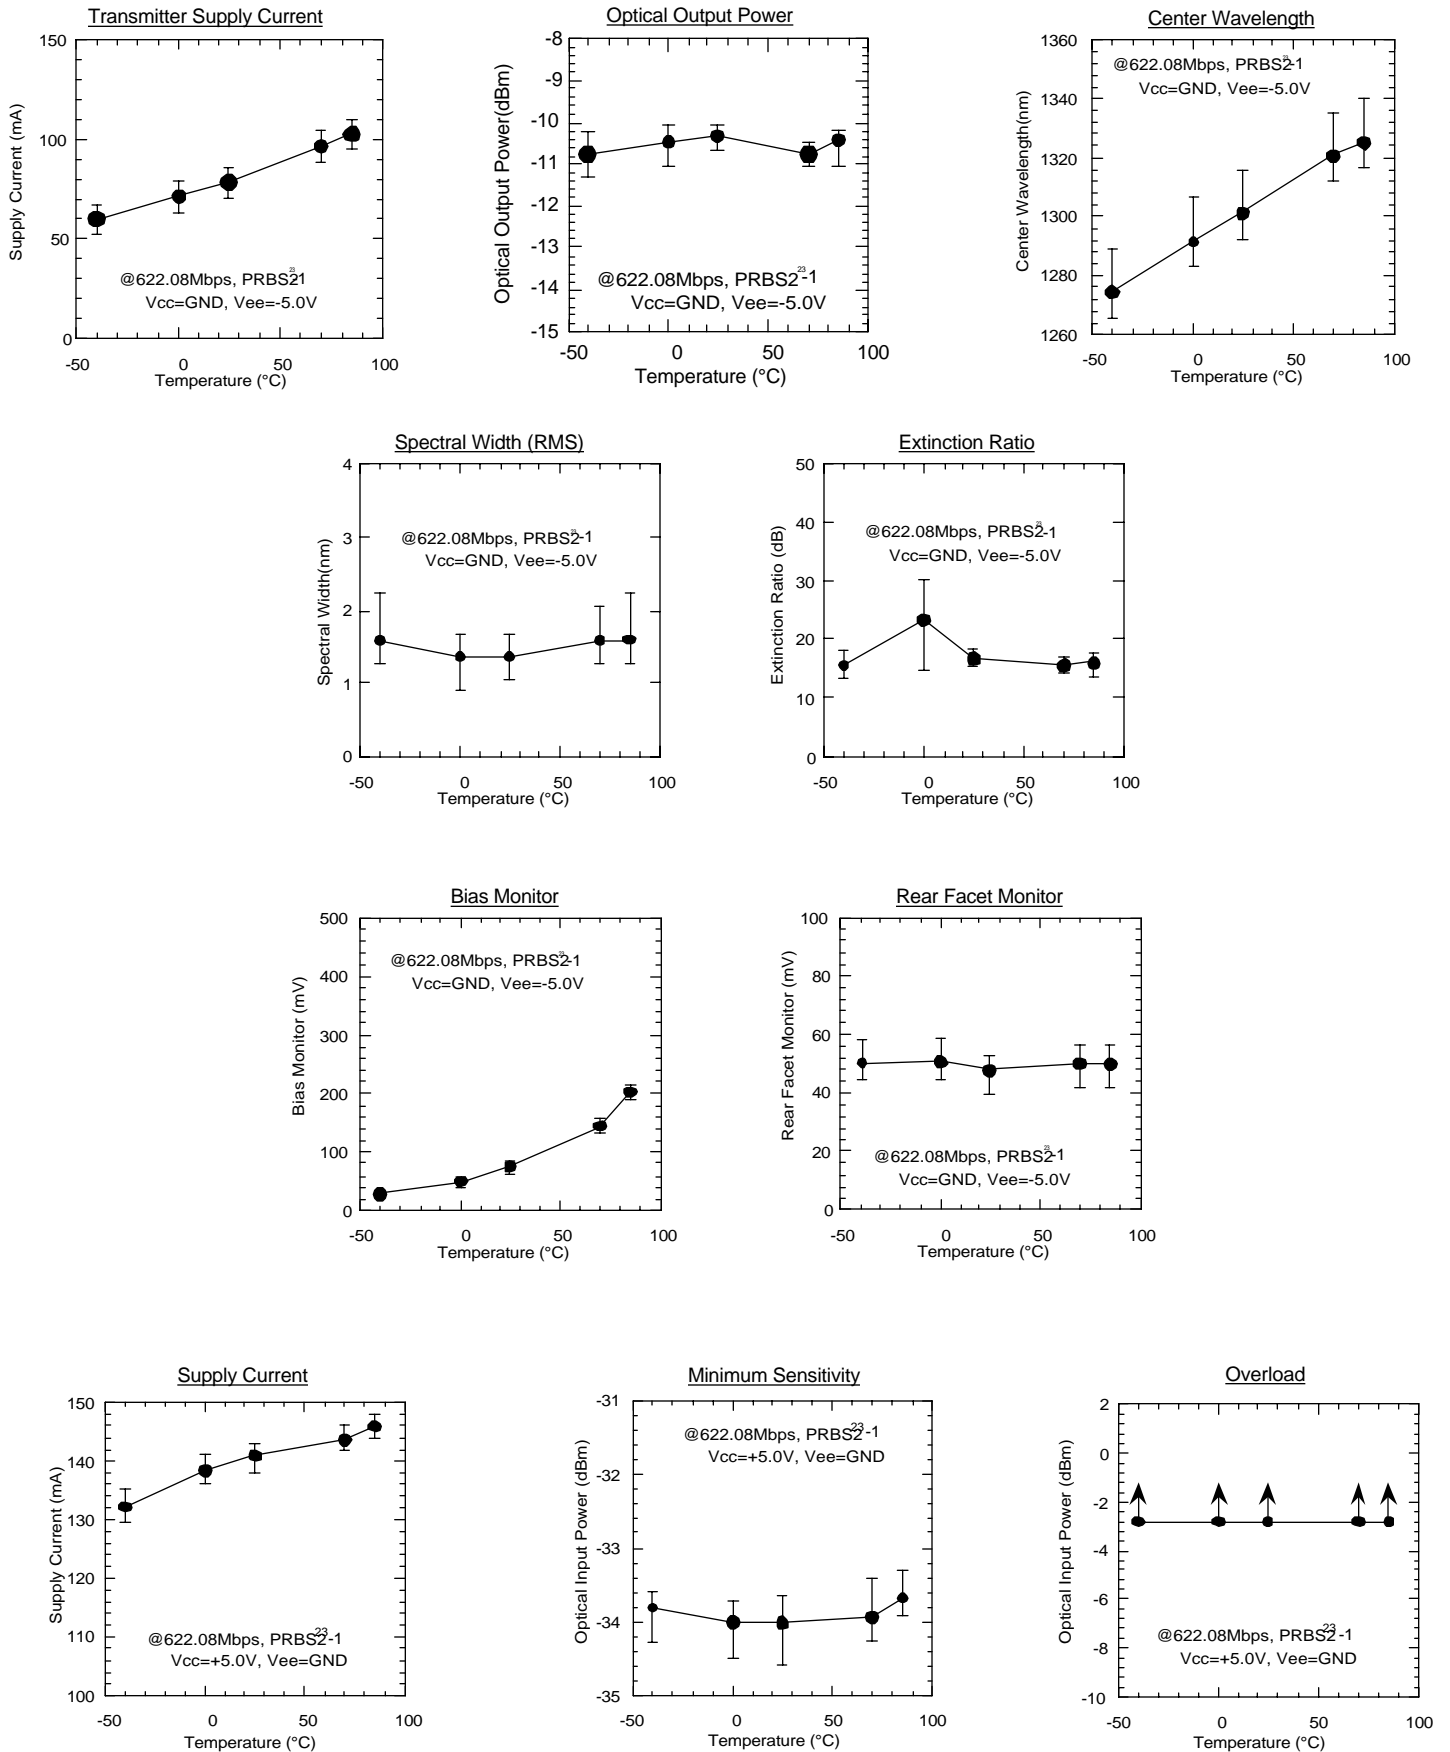

(SDM7302-XC)



## 11. Reliability Test

Bellcore TA-NWT-000983 Issue 2, December 1993								
Heading	Test	Reference	Condition	Sampling			SEI Result	
				LTPD	SS	C	SS	F/C
Mechanical Integrity	Mechanical Shock	MIL-STD-883 Method 2002	Condition B					
			5 times/axis					
	Vibration	MIL-STD-883 Method 2007	500G, 1.0 ms	20%	11	0	---	---
			1,500G, 0.5ms	20%	11	0	11	0
			Condition A	20%	11	0	11	0
			20 G					
Thermal Shock	MIL-STD-883 Method 1011	20-2,000 Hz						
		4 min/cycle; 4 cycles/axis						
Endurance	Solderability	MIL-STD-883 Method 2003	ΔT=100°C	20%	11	0	11	0
			(steam aging not required)	20%	11	0	11	0
	Fiber Pull		1 Kg; 3 times;5sec.	20%	11	0	---	---
			2 Kg; 3 times; 5sec.	20%	11	0	---	---
	Accel. Aging (High Temp.)	(R)-453 Section 5.18	+85C; rated power					
			>5,000hrs.	---	25	---	25	0
Special Tests	High Temp. Storage	-----	>10,000hrs.	---	10	---	---	---
			max. storage T (T=85°C)	20%	11	0	---	---
	Low Temp. Storage	-----	>2,000					
			min. storage T (T=-40°C)	20%	11	0	11	0
	Temperature Cycling	Section 5.20	>2,000					
			- 40°C to +85°C					
			400 times pass/fail	20%	11	0	---	---
			500 times for info.	---	11	---	---	---
	Damp Heat (if using epoxy)	MIL-STD-202 M103 or IEC 68-2-3	500 times pass/fail	20%	11	0	11	0
			1000 times for info.	---	11	---	11	0
Cyclic Moisture Resistance	Section 5.23	40°C , 95%, 56days	20%	11	0	11	0	
		or 85°C /85%RH 2,000hrs.	20%	11	0	---	---	
Special Tests	Internal Moisture	MIL-STD-883 Method 1018	-----	20%	11	0	11	0
			-----	---	6	---	6	0
			-----	---	6	---	6	0

## 12. Laser Safety

This product uses a semiconductor laser system and is a laser class 1 product acc. FDA, complies with 21CFR1040. 10 and 1040.11. Also this product is a laser class 1 product acc. IEC 825-1.

Class 1 Laser Product

### ⚠ Caution



If this product is used under conditions not recommended in the specification or this product is used with unauthorized revision n, classification for laser product safety standard is invalid. Classify the product again at your responsibility and take appropriate actions.

### 13. Ordering Information




Ordering Number	Connector type	Operating Temperature
SDM7302-XC	SC Duplex Connector	0 ~ 70°C
SDM7302-XC-W	SC Duplex Connector	-40 ~ 85°C




### 14. Other Precaution

Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

The governmental approval is required to export this product to other countries. To dispose of these components, the appropriate procedure should be taken to prevent illegal exportation.

This module must be handled, used and disposed of according to your company's safe working practice.

 <b>Warning</b>	
	Be sure to carry out correct soldering for connection to peripheral circuits in order to prevent contact failure or short-circuit. Otherwise, a strong laser beam may cause eye injury, overheating or fire.
	Do not put this product or components of this product into your mouth. This product contains material harmful to health.

 <b>Caution</b>	
	Be sure to turn the power off when you touch this product connected to the printed circuit boards. Otherwise, electric shock may occur.
	Dispose this product or equipment including this product properly as an industrial waste according to the regulations.

### 15. For More Information

#### U.S.A.

Sumitomo Electric Lightwave Corp, 78 Alexander Drive, Research Triangle Park, NC 27709  
 Tel. (919)541-8100 / Fax. (919)541-8376  
 E-mail [info@sumitomoelectric.com](mailto:info@sumitomoelectric.com)  
<http://www.sumitomoelectric.com>

#### Europe

Sumitomo Electric Europe Ltd., Unit 11, Magnolia House, Spring Villa Park, Spring Villa Road  
 Edgware, Middlesex, HA87EB, United Kingdom  
 Tel. (0181)905-6167  
 Fax. (0181)905-6120

#### Japan

Sumitomo Electric Industries, Ltd. ( International Business Division ), 3-12, Moto-Akasaka 1-chome  
 Minato-ku Tokyo 107-8468  
 Tel. (03)3423-5771 / Fax. (03)3423-5099  
 E-mail [product-info@yfoes.sei.co.jp](mailto:product-info@yfoes.sei.co.jp)  
[http://www.sei.co.jp/Electro-optic/eopd\\_home\\_e.html](http://www.sei.co.jp/Electro-optic/eopd_home_e.html)