



RLD30 / No. 707



Dimensions (mm)



Radial Leaded, 30V

Approvals

cULus Recognized: File No. E201431
TÜV: File No. R9956421

Features

Low voltage (30Vdc) overcurrent protection
Low resistance and power dissipation
High hold currents
Low trip-to-hold current ratios
Internationally approved

Wide range of applications, including general electronics, computers, peripherals and automotive electronics

WebLinks

Data Sheet

www.wickmannusa.com/products/707.pdf

Packaging

www.wickmannusa.com/pack

Specifications

Packaging

00: Bulk (Qty.: see table below)
02: Tape/Ampack (Qty.: see table below)

Materials

Insulating Mat: Cured Epoxy Polymer, UL 94V0
Round Pins: Copper alloy, tin plated

Device Surface Temperature in Tripped State

125°C Max.

Operating / Storage Temperature

-40°C to +85°C (see de-rating table)

Humidity Ageing

+85°C, 85% RH, 1000 hrs., ± 5% typical resistance change

Passive Ageing

+85°C, 1000 hrs., ± 5% typical resistance change

Thermal Shock

+125°C to -40°C, 10 times, ±10% typical resistance change (MIL-STD-202F, Method 107G)

Solvent Resistance

MIL-STD-202, Method 215F, no change

Solderability

260°C, ≤ 3 sec. (MIL-STD-202, Method 208E)

Marking

"P", Voltage, Current Code, Lot Number



Dimensions Legend

Packaging Quantity

Rating	A (max.)	B (max.)	C (typ.)	D (min.)	E (max.)	F (Ø)	Bulk	Tape
900mA / 30V	7.4	12.2	5.1	7.6	3.0	0.51	500	3000
1.10A / 30V	7.4	14.2	5.1	7.6	3.0	0.51	500	3000
1.35A / 30V	8.9	13.5	5.1	7.6	3.0	0.51	500	2500
1.60A / 30V	8.9	15.2	5.1	7.6	3.0	0.51	500	2500
1.85A / 30V	10.2	15.7	5.1	7.6	3.0	0.51	500	2500
2.50A / 30V	11.4	18.3	5.1	7.6	3.0	0.51	500	2000
3.00A / 30V	11.4	17.3	5.1	7.6	3.0	0.81	500	2000
4.00A / 30V	14.0	20.1	5.1	7.6	3.0	0.81	100	2000
5.00A / 30V	14.0	24.9	10.2	7.6	3.0	0.81	100	1000
6.00A / 30V	16.5	24.9	10.2	7.6	3.0	0.81	100	1000
7.00A / 30V	19.1	26.7	10.2	7.6	3.0	0.81	100	1000
8.00A / 30V	21.6	29.2	10.2	7.6	3.0	0.81	100	1000
9.00A / 30V	24.1	29.7	10.2	7.6	3.0	0.81	100	1000

Permissible continuous operating current is ≤ 100% at ambient temperature of 20°C (68°F).

Hold Current I_{hold}	Model Code	Trip Current I_{trip} (A)	Voltage Rating (Vdc)	max. Fault Current I_{max} (A)	max. Power Dissipation P_d (W)	max. Time-to-trip (A) (s)	Resistance R_{min} min. (Ω)	R_{1max} max. (Ω)	Model	Approvals cULus TÜV
900mA	09000	1.80	30	40	0.6	4.50 5.9	0.070	0.220	RLD30P090U	• •
1.10A	11100	2.20	30	40	0.7	5.50 6.6	0.050	0.170	RLD30P110U	• •
1.35A	11350	2.70	30	40	0.8	6.75 7.3	0.040	0.130	RLD30P135U	• •
1.60A	11600	3.20	30	40	0.9	8.00 8.0	0.030	0.110	RLD30P160U	• •
1.85A	11850	3.70	30	40	1.0	9.25 8.7	0.020	0.090	RLD30P185U	• •
2.50A	12500	5.00	30	40	1.2	12.50 10.3	0.020	0.070	RLD30P250U	• •
3.00A	13000	6.00	30	40	2.0	15.00 10.8	0.010	0.080	RLD30P300U	• •
4.00A	14000	8.00	30	40	2.5	20.00 12.7	0.010	0.050	RLD30P400U	• •
5.00A	15000	10.00	30	40	3.0	25.00 14.5	0.005	0.050	RLD30P500U	• •
6.00A	16000	12.00	30	40	3.5	30.00 16.0	0.005	0.040	RLD30P600U	• •
7.00A	17000	14.00	30	40	3.8	35.00 17.5	0.005	0.030	RLD30P700U	• •
8.00A	18000	16.00	30	40	4.0	40.00 18.8	0.005	0.020	RLD30P800U	• •
9.00A	19000	18.00	30	40	4.2	40.00 20.0	0.005	0.020	RLD30P900U	• •

I_{hold} = Hold current: maximum current device will pass without tripping in 20°C still air.

I_{trip} = Trip current: minimum current at which the device will trip in 20°C still air.

V_{max} = Maximum voltage device can withstand without damage at rated current (I_{max}).

I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max}).

P_d = Power dissipated from device when in the tripped state at 20°C still air.

R_{min} = Minimum resistance of device in initial (un-soldered) state.

R_{1max} = Maximum resistance of device at 20°C measured one hour after tripping.


Caution: Operation beyond the specified rating may result in damage and possible arcing and flame. Specifications are subject to change without notice.

Order Information

Qty.	Order-Number	Series	Model Code	Packaging
		707		

RLD30 / No. 707

Time-to-trip Characteristics

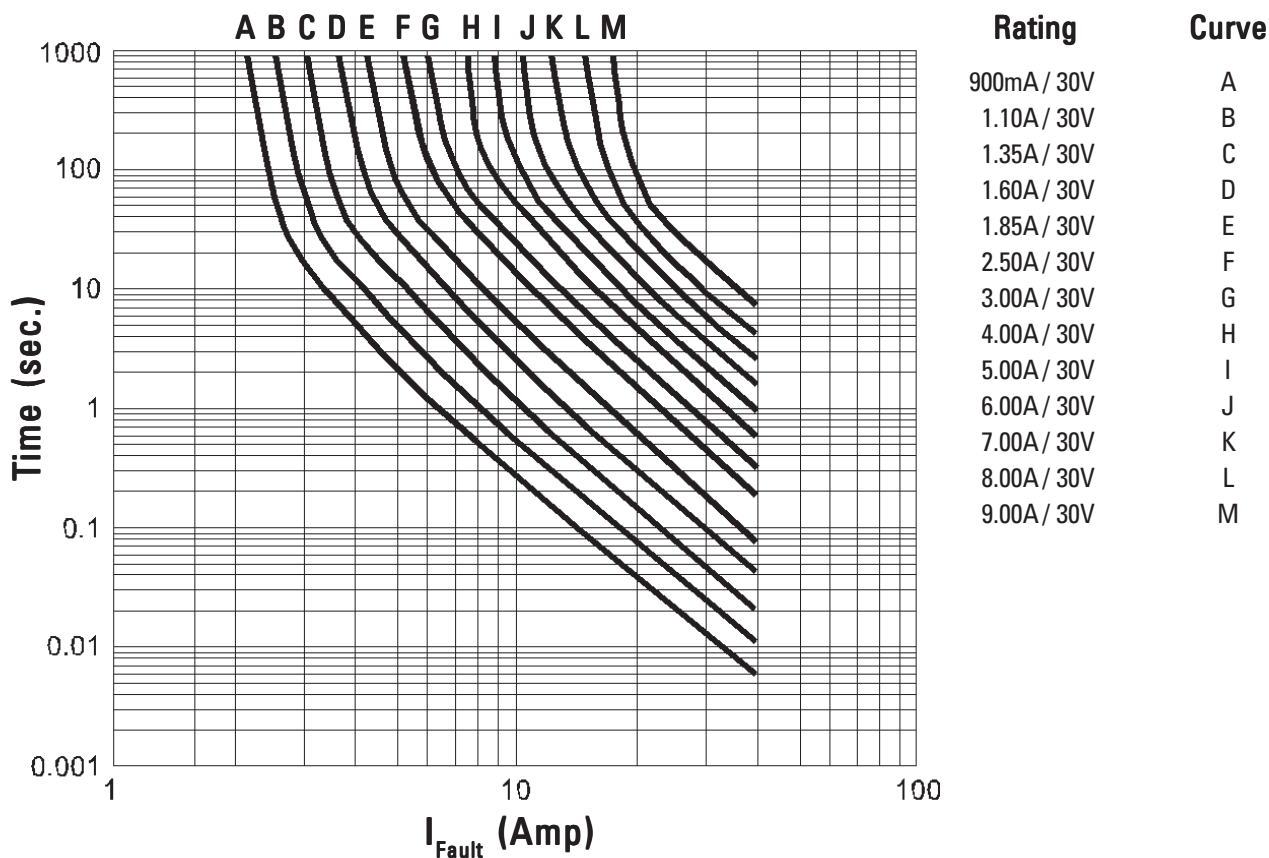

Thermal Derating Chart

Rating	I _{hold} (Amp) / Ambient Operating Temperature								
	-40°C	-20°C	0°C	23°C	40°C	50°C	60°C	70°C	85°C
900mA / 30V	1.31	1.17	1.04	0.90	0.75	0.69	0.61	0.55	0.47
1.10A / 30V	1.60	1.43	1.27	1.10	0.91	0.85	0.75	0.67	0.57
1.35A / 30V	1.96	1.76	1.55	1.35	1.12	1.04	0.92	0.82	0.70
1.60A / 30V	2.32	2.08	1.84	1.60	1.33	1.23	1.09	0.98	0.83
1.85A / 30V	2.68	2.41	2.13	1.85	1.54	1.42	1.26	1.13	0.96
2.50A / 30V	3.63	3.25	2.88	2.50	2.08	1.93	1.70	1.53	1.30
3.00A / 30V	4.35	3.90	3.45	3.00	2.49	2.31	2.04	1.83	1.56
4.00A / 30V	5.80	5.20	4.60	4.00	3.32	3.08	2.72	2.44	2.08
5.00A / 30V	7.25	6.50	5.75	5.00	4.15	3.85	3.40	3.05	2.60
6.00A / 30V	8.70	7.80	6.90	6.00	4.98	4.62	4.08	3.66	3.12
7.00A / 30V	10.15	9.10	8.05	7.00	5.81	5.39	4.76	4.27	3.64
8.00A / 30V	11.60	10.40	9.20	8.00	6.64	6.16	5.44	4.88	4.16
9.00A / 30V	13.05	11.70	10.35	9.00	7.47	6.93	6.12	5.49	4.68