


Product Description

Sirenza Microdevices' SGA-7489 is a high performance cascadeable 50-ohm amplifier designed for operation at 5 Volts DC. This RFIC uses the latest Silicon Germanium Heterostructure Bipolar Transistor (SiGe HBT) process featuring 1 micron emitters with F_T up to 50 GHz.

This circuit uses a darlington pair topology with resistive feedback for broadband performance as well as stability over its entire temperature range. Internally matched to 50 ohm impedance, the SGA-7489 requires only DC blocking and bypass capacitors and a bias inductor for external components. Frequency performance may be extended using the 2 GHz application circuit shown on sheet 5.

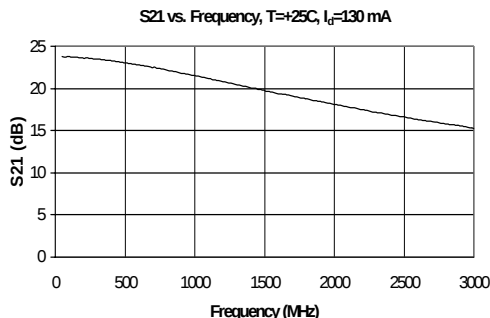


Symbol	Parameters: Test Conditions: Z ₀ = 50 Ohms, I _D = 130 mA, T = 25°C		Units	Min.	Typ.	Max.	Notes
P _{1dB}	Output Power at 1dB Compression	f = 100 MHz f = 500 MHz f = 850 MHz f = 1950 MHz *	dBm dBm dBm dBm		22.8 22.6 22.4 20.3*		* Using 2 GHz App. Ckt. (sheet 5)
OIP ₃	Output Third Order Intercept Point Power out per tone = 0 dBm	f = 100 MHz f = 500 MHz f = 850 MHz f = 1950 MHz *	dBm dBm dBm dBm		38.6 37.2 36.0 35.7*		* Using 2 GHz App. Ckt. (sheet 5)
S ₂₁	Small Signal Gain	f = 100 MHz f = 500 MHz f = 850 MHz f = 1950 MHz *	dB dB dB dB		23.7 23.0 22.0 18.3*		* Using 2 GHz App. Ckt. (sheet 5)
Bandwidth	(Determined by S ₁₁ , S ₂₂ Values)		MHz		3000		
VSWR _{IN}	Input Return Loss	f = DC-3000 MHz	dB		11.8		
VSWR _{OUT}	Output Return Loss	f = DC-3000 MHz	dB		9.3		
S ₁₂	Reverse Isolation	f = 100 MHz f = 500 MHz f = 850 MHz f = 1950 MHz *	dB dB dB dB		25.8 25.8 25.4 22.7*		* Using 2 GHz App. Ckt. (sheet 5)
NF	Noise Figure, Z _s = 50 Ohms	f = 850 MHz	dB		2.9		
V _D	Device Operating Voltage		V		5.0		
I _D	Device Operating Current		mA	117	130	143	
R _{TH} J-I	Thermal Resistance (junction - lead)		° C/W		82		

The information provided herein is believed to be reliable at press time. Sirenza Microdevices assumes no responsibility for inaccuracies or omissions. Sirenza Microdevices assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Sirenza Microdevices does not authorize or warrant any Sirenza Microdevices product for use in life-support devices and/or systems. Copyright 2001 Sirenza Microdevices, Inc. All worldwide rights reserved.

SGA-7489

DC-3000 MHz Silicon Germanium HBT Cascadeable Gain Block



Product Features

- DC-3000 MHz Operation
- Single Voltage Supply
- High Output Intercept: +36 dBm typ. at 850 MHz
- Low Noise Figure: 2.9 dB typ. at 850 MHz

Applications


- Oscillator Amplifiers
- PA for Low / Medium Power Applications
- IF/ RF Buffer Amplifier
- Drivers for CATV Amplifiers
- LO Driver Amplifier

Parameter	Typical	Unit	Test Condition ($I_D = 130 \text{ mA}$, $T_L = 25^\circ\text{C}$ unless otherwise noted)
100 MHz			
Gain	23.7	dB	$Z_s = 50 \text{ Ohms}$ Tone spacing = 1 MHz, Pout per tone = 0 dBm
Noise Figure	2.7	dB	
Output IP3	38.6	dBm	
Output P1dB	22.8	dBm	
Input Return Loss	15.0	dB	
Reverse Isolation	25.8	dB	
500 MHz			
Gain	23.0	dB	$Z_s = 50 \text{ Ohms}$ Tone spacing = 1 MHz, Pout per tone = 0 dBm
Noise Figure	2.7	dB	
Output IP3	37.2	dBm	
Output P1dB	22.6	dBm	
Input Return Loss	16.2	dB	
Reverse Isolation	25.8	dB	
850 MHz			
Gain	22.0	dB	$Z_s = 50 \text{ Ohms}$ Tone spacing = 1 MHz, Pout per tone = 0 dBm
Noise Figure	2.9	dB	
Output IP3	36.0	dBm	
Output P1dB	22.4	dBm	
Input Return Loss	17.3	dB	
Reverse Isolation	25.4	dB	
1950 MHz			
Gain	18.2	dB	$Z_s = 50 \text{ Ohms}$ Tone spacing = 1 MHz, Pout per tone = 0 dBm
Noise Figure	---	dB	
Output IP3 *	33.3	dBm	
Output P1dB *	19.9	dBm	
Input Return Loss	15.5	dB	
Reverse Isolation	22.9	dB	
2400 MHz			
Gain	16.9	dB	$Z_s = 50 \text{ Ohms}$ Tone spacing = 1 MHz, Pout per tone = 0 dBm
Noise Figure	---	dB	
Output IP3 *	31.9	dBm	
Output P1dB *	18.9	dBm	
Input Return Loss	13.8	dB	
Reverse Isolation	21.7	dB	

* NOTE: P1dB and IP3 @1950,2400 MHz may be improved by using the tuned circuit shown on sheet 5


Absolute Maximum Ratings

Parameter	Absolute Limit
Max. Device Current (I_D)	160 mA
Max. Device Voltage (V_D)	7 V
Max. RF Input Power	+10 dBm
Max. Junction Temp. (T_J)	+150°C
Operating Temp. Range (T_L)	-40°C to +85°C
Max. Storage Temp.	+150°C
Operation of this device beyond any one of these limits may cause permanent damage. For reliable continuous operation, the device voltage and current must not exceed the maximum operating values specified in the table on page one. Bias Conditions should also satisfy the following expression: $I_D V_D < (T_J - T_L) / R_{TH} \text{ J-1}$	

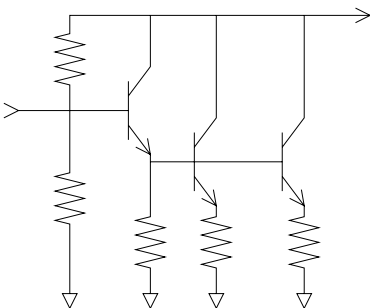Pin #	Function	Description	Device Schematic
1	RF IN	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.	
2	GND	Connection to ground. Use via holes for best performance to reduce lead inductance. Place vias as close to ground leads as possible.	
3	RF OUT/Vcc	RF output and bias pin. Bias should be supplied to this pin through an external series resistor and RF choke inductor. Because DC biasing is present on this pin, a DC blocking capacitor should be used in most applications (see application schematic). The supply side of the bias network should be well bypassed.	
4	GND	Same as Pin 2.	


Recommended Bias Resistor Values			
Supply Voltage (Vs)	7V	8V	9V
Rbias (Ohms)	15	22	30
Power Rating (W)	0.5	0.5	1.0

Application Circuit Component Description	Choose circuit components such that the following conditions are met at the minimum operational frequency:
Bias Inductor	$XLb \geq 250 \text{ Ohms}$
Input / Output Coupling Capacitors	$XCc \leq 10 \text{ Ohms}$
Decoupling Capacitors	$XCd \leq 1 \text{ Ohm}$

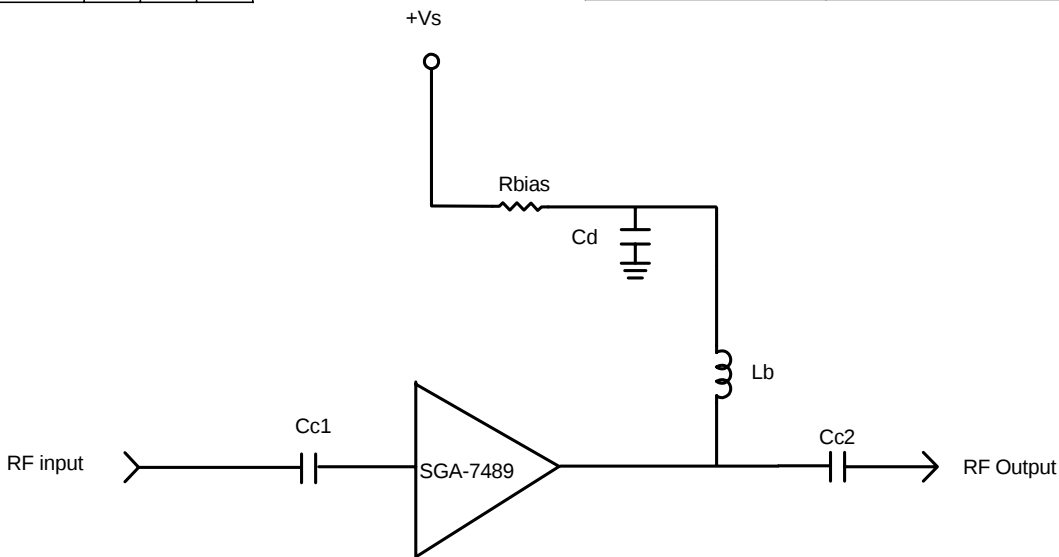


SGA-7489 Basic Application Circuit

S-Parameter Data @ -40C,+25C,+85C , $I_d = 130$ mA

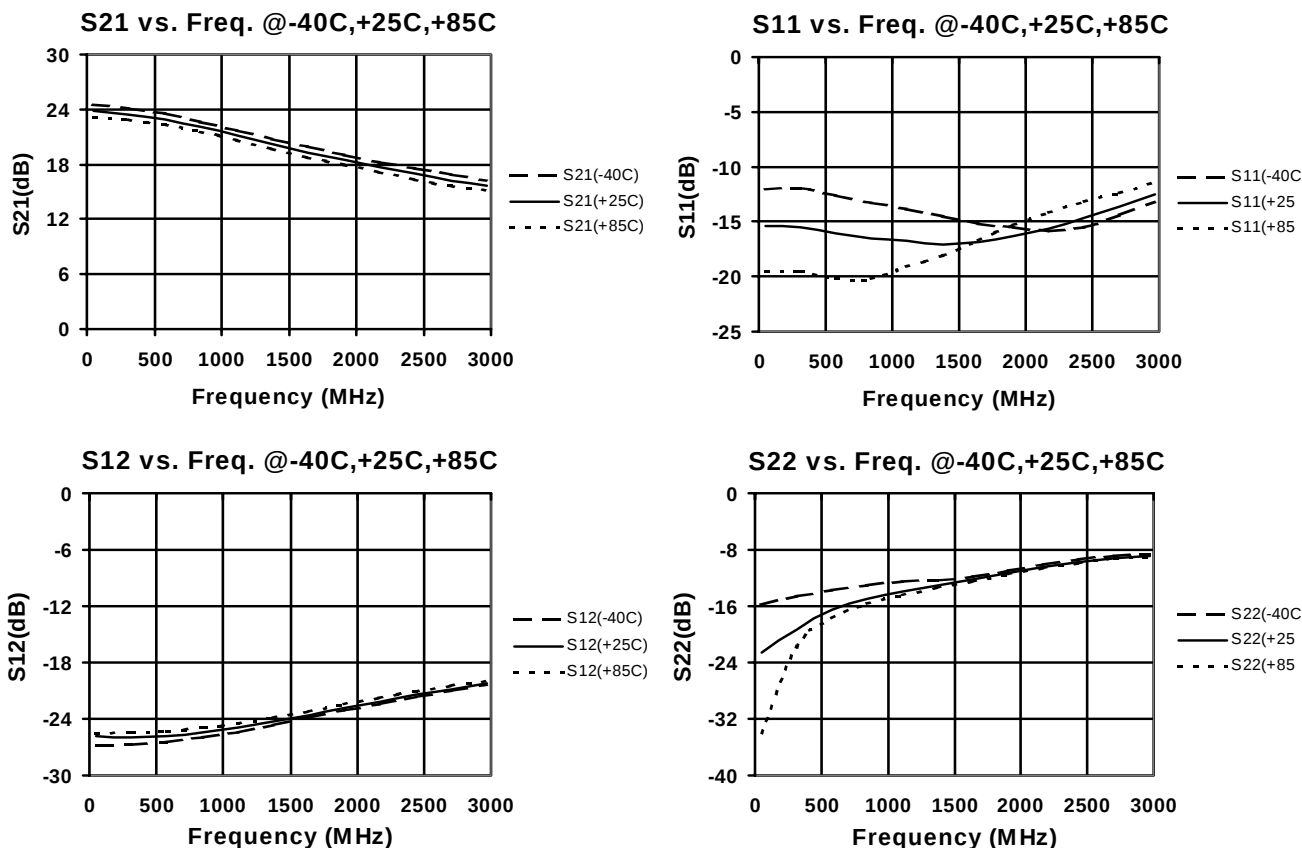

P1dB & IP3 vs. Frequency @ 3 Temps. $I_d = 130$ mA

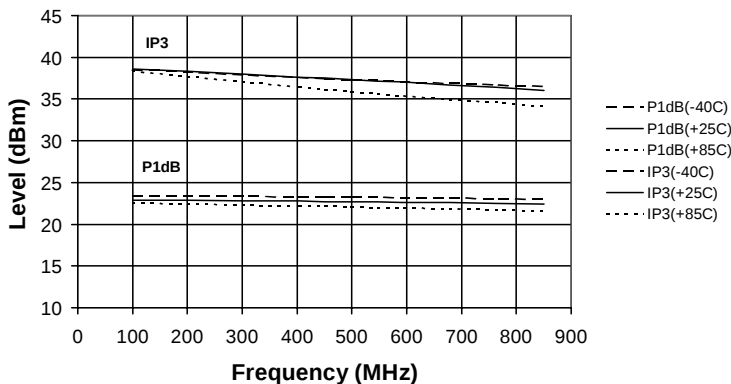

The SGA-7489 may be tuned in the manner shown below for operation at 2 GHz.

Component Parts List


Component Type	Value	Manufacturer	P/N
Cc1, Cc2, Cd1	100 pF	ROHM	MCH185A101JK
CM1	1.2 pF	ROHM	MCH185A1R2JK
CM2	1.5 pF	ROHM	MCH185A1R5JK
Cd2	0.1 uF	ROHM	MCH182FN1042K
Lb	22 nH	TOKO	LL1608FS22NJ
Rb1, Rb2	30 Ohms, 1/4	ROHM	Type MRC 18

Table of Delay Elements

Ref. Desig.	Zo (Ohms)	Phase Delay @ 2 GHz (Degrees)
Z1	50	14.5
Z2	50	34.1
Z3	50	21.5

Note: Separation Distance between via holes on board represents approx. 5.4 Degrees phase shift @ 2GHz for equivalent distance on microstrip.

Board material is GETEK, $\epsilon = 4.1$

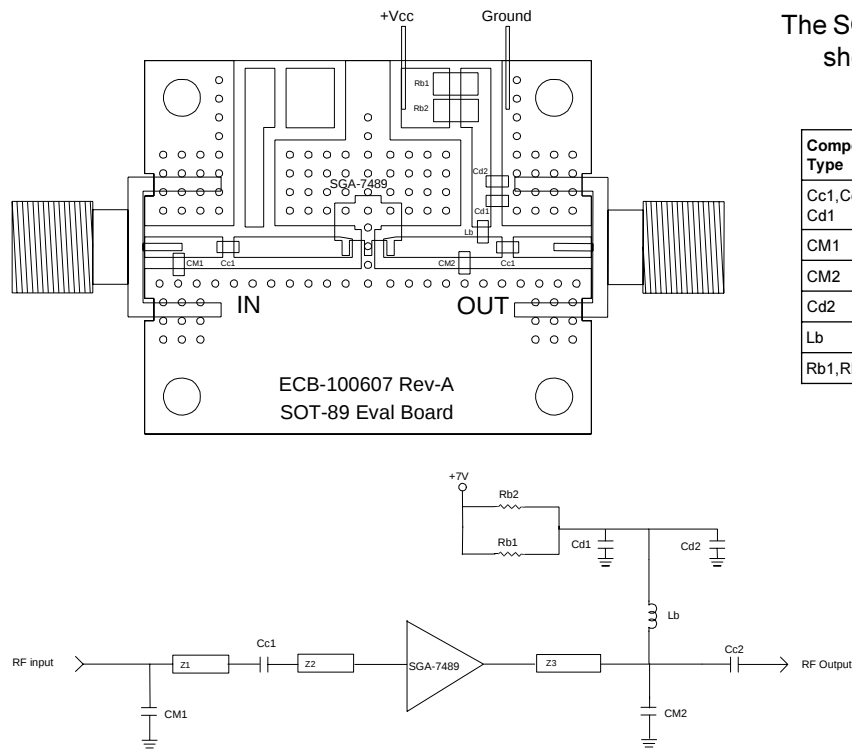


SGA-7489 2 GHz Application Circuit


SGA-7489 2 GHz Tuned Application Ckt. Summary Data Table

Parameter	Typical 25°C	Unit	Test Condition ($I_b = 130$ mA, unless otherwise noted)
1700 MHz			
Gain	18.6	dB	$Z_s = 50$ Ohms Tone spacing = 1 MHz, Pout per tone = 0 dBm
Noise Figure	3.1	dB	
Output IP3	36.1	dBm	
Output P1dB	20.8	dBm	
Input Return Loss	10.0	dB	
Reverse Isolation	23.8	dB	
1900 MHz			
Gain	18.3	dB	$Z_s = 50$ Ohms Tone spacing = 1 MHz, Pout per tone = 0 dBm
Noise Figure	3.3	dB	
Output IP3	36.0	dBm	
Output P1dB	20.4	dBm	
Input Return Loss	11.2	dB	
Reverse Isolation	23.0	dB	
2100 MHz			
Gain	18.2	dB	$Z_s = 50$ Ohms Tone spacing = 1 MHz, Pout per tone = 0 dBm
Noise Figure	3.7	dB	
Output IP3	34.5	dBm	
Output P1dB	19.9	dBm	
Input Return Loss	16.3	dB	
Reverse Isolation	22.1	dB	

Gain vs. Frequency for 2GHz Tuned Circuit, $I_d = 130$ mA, $T = +25^\circ\text{C}$

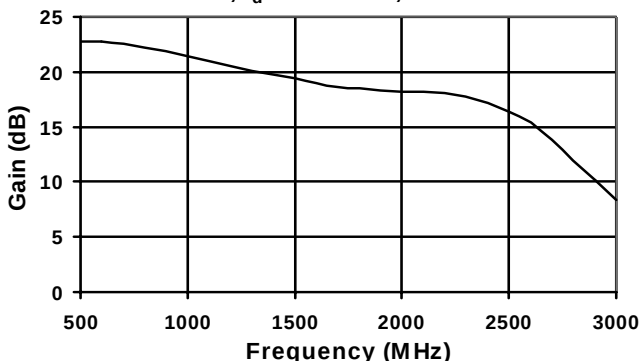


P1dB & IP3 vs. Frequency for 2GHz Tuned Circuit, $I_d = 130$ mA, $T = +25^\circ\text{C}$

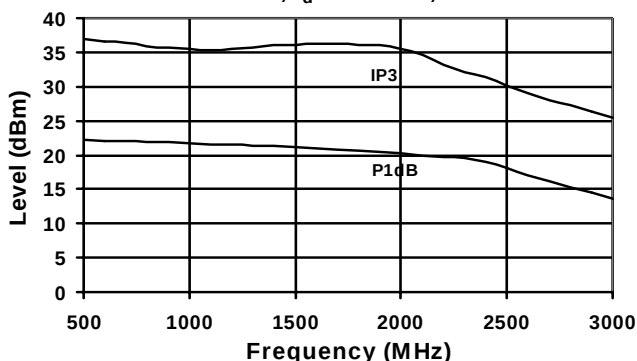


S-Parameter Data for 2 GHz Tuned Application Circuit


S21 vs. Frequency, $I_d = 130$ mA, $T = +25^\circ\text{C}$

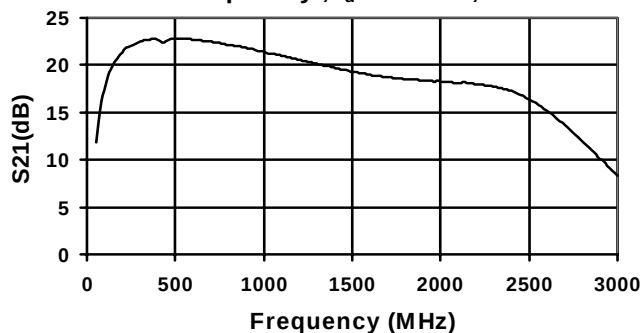


S11 vs. Frequency, $I_d = 130$ mA, $T = +25^\circ\text{C}$

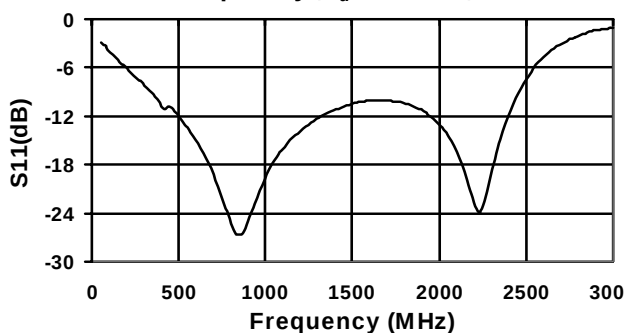




S12 vs. Frequency, $I_d = 130$ mA, $T = +25^\circ\text{C}$

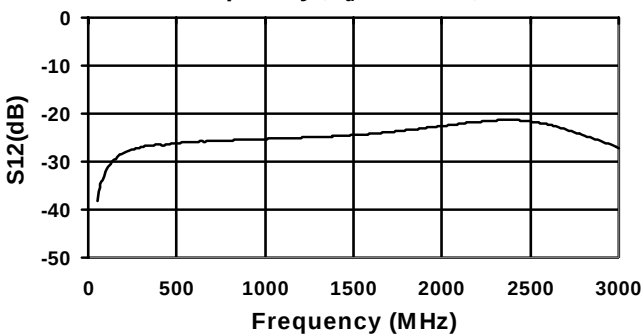

S22 vs. Frequency, $I_d = 130$ mA, $T = +25^\circ\text{C}$

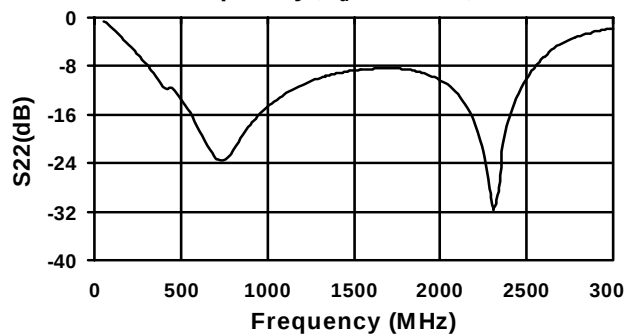

**Noise Figure vs. Frequency for SGA-7489 2GHz
Tuned Circuit, $I_d=130$ mA, $T=+25^\circ\text{C}$**

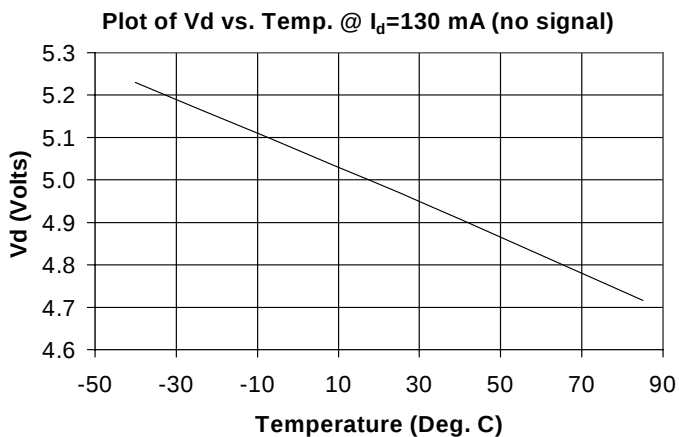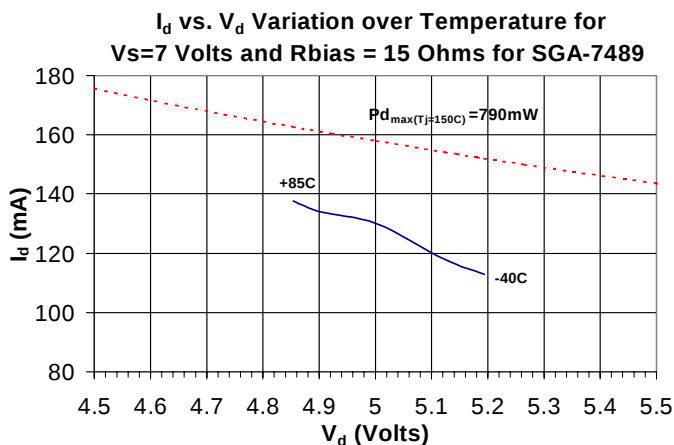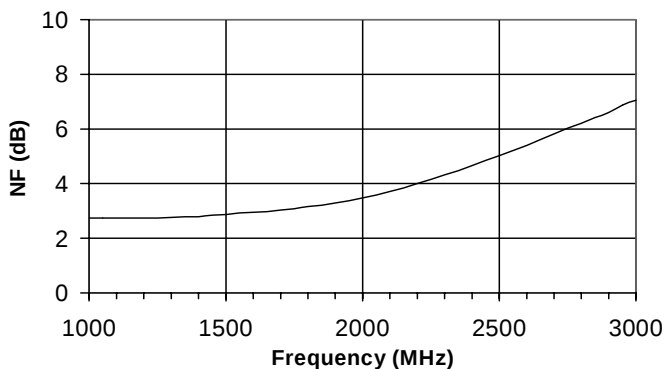



Caution: ESD sensitive

Appropriate precautions in handling, packaging and testing devices must be observed.

Preliminary

SGA-7489 DC-3000 MHz 5V SiGe Amplifier

Part Number Ordering Information


Part Number	Reel Size	Devices/Reel
SGA-7489	13"	3000

Part Symbolization

The part will be symbolized with "A74" designator on the top surface of the package.


Package Dimensions

Pin #	Function
1	RFin
2	Gnd
3	RFout/Vcc
4	Gnd

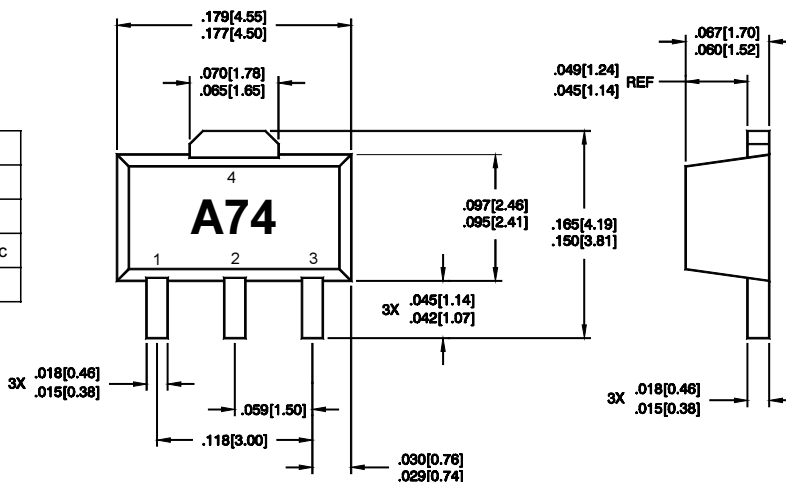

Pin assignments shown for reference only, not marked on part

PCB Pad Layout

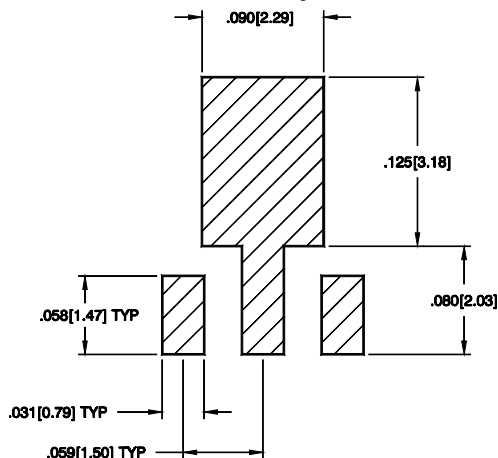

DIMENSIONS ARE IN INCHES [MM]