SGA-5389

DC-4500 MHz, Cascadable SiGe HBT MMIC Amplifier

Product Description

Sirenza Microdevices' SGA-5389 is a high performance SiGe HBT MMIC Amplifier. A Darlington configuration featuring 1 micron emitters provides high F_T and excellent thermal perfomance. The heterojunction increases breakdown voltage and minimizes leakage current between junctions. Cancellation of emitter junction non-linearities results in higher suppression of intermodulation products. At 850 Mhz and 60mA , the SGA-5389 typically provides +31.5 dBm output IP3, 16.4 dB of gain, and +16.3 dBm of 1dB compressed power using a single positive voltage supply. Only 2 DC-blocking capacitors, a bias resistor and an optional RF choke are required for operation.

Gain & Return Loss vs. Frequency

V_D= 3.6 V, I_D= 60 mA (Typ.)

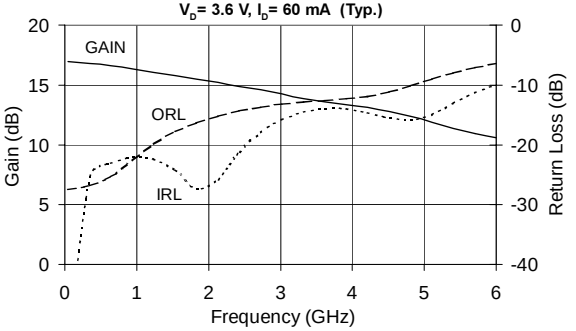

Product Features

- **High Gain : 15.4 dB at 1950 MHz**
- **Cascadable 50 Ohm**
- **Patented SiGe Technology**
- **Operates From Single Supply**
- **Low Thermal Resistance Package**

Applications

- **PA Driver Amplifier**
- **Cellular, PCS, GSM, UMTS**
- **IF Amplifier**
- **Wireless Data, Satellite**

Symbol	Parameter	Units	Frequency	Min.	Typ.	Max.
G	Small Signal Gain	dB dB dB	850 MHz 1950 MHz 2400 MHz	14.8	16.4 15.4 14.9	18.0
P_{1dB}	Output Power at 1dB Compression	dBm dBm	850 MHz 1950 MHz		16.3 15.0	
OIP_3	Output Third Order Intercept Point	dBm dBm	850 MHz 1950 MHz		31.5 28.1	
Bandwidth	Determined by Return Loss (>10dB)	MHz			4500	
IRL	Input Return Loss	dB	1950 MHz		27.6	
ORL	Output Return Loss	dB	1950 MHz		15.9	
NF	Noise Figure	dB	1950 MHz		3.5	
V_D	Device Operating Voltage	V		3.1	3.6	4.1
I_D	Device Operating Current	mA		54	60	66
R_{TH}, j-l	Thermal Resistance (junction to lead)	°C/W			97	

Test Conditions: V_S = 8 V, I_D = 60 mA Typ., OIP_3 Tone Spacing = 1 MHz, Pout per tone = 0 dBm; R_{BIAS} = 75 Ohms, T_L = 25ºC, Z_S = Z_L = 50 Ohms

The information provided herein is believed to be reliable at press time. Sirenza Microdevices assumes no responsibility for inaccuracies or omissions. Sirenza Microdevices assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Sirenza Microdevices does not authorize or warrant any Sirenza Microdevices product for use in life-support devices and/or systems. Copyright 2001 Sirenza Microdevices, Inc.. All worldwide rights reserved.

522 Almanor Ave., Sunnyvale, CA 94085 Phone: (800) SMI-MMIC http://www.sirenza.com

Typical RF Performance at Key Operating Frequencies

Symbol	Parameter	Unit	Frequency (MHz) 100	500	850	1950	2400	3500
G	Small Signal Gain	dB	16.9	16.7	16.4	15.4	14.9	13.7
OIP_3	Output Third Order Intercept Point	dBm		31.8	31.5	28.1	26.6	
P_{1dB}	Output Power at 1dB Compression	dBm		16.7	16.3	15.0	14.1	
IRL	Input Return Loss	dB	37.5	24.0	22.2	27.6	21.6	14.1
ORL	Output Return Loss	dB	27.8	26.2	23.4	15.9	14.4	12.7
S_{12}	Reverse Isolation	dB	20.5	20.6	20.8	21.6	21.7	21.1
NF	Noise Figure	dB		3.4	3.3	2.8	4.1	

Test Conditions: V_S = 8 V, R_{BIAS} = 75 Ohms, I_D = 60 mA Typ., T_L = 25ºC, OIP_3 Tone Spacing = 1 MHz, Pout per tone = 0 dBm, $Z_S = Z_L$ = 50 Ohms

Noise Figure vs. Frequency

V_D=3.6 V, I_D= 60 mA (Typ.)

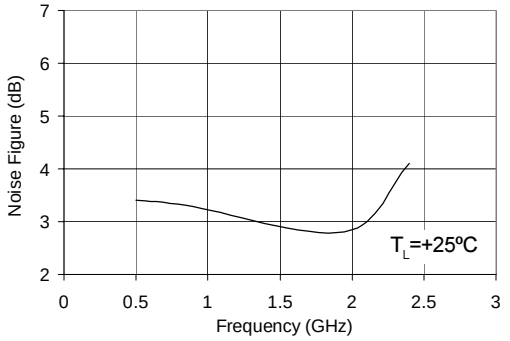

Absolute Maximum Ratings

Parameter	Absolute Limit
Max. Device Current (I_D)	120 mA
Max. Device Voltage (V_D)	5 V
Max. RF Input Power	+16 dBm
Max. Junction Temp. (T_J)	+150°C
Operating Temp. Range (T_L)	-40°C to +85°C
Max. Storage Temp.	+150°C

Operation of this device beyond any one of these limits may cause permanent damage. For reliable continous operation, the device voltage and current must not exceed the maximum operating values specified in the table on page one.

Bias Conditions should also satisfy the following expression:

$I_D V_D < (T_J - T_L) / R_{TH}$, j-l

OIP_3 vs. Frequency

V_D= 3.6 V, I_D= 60 mA (Typ.)

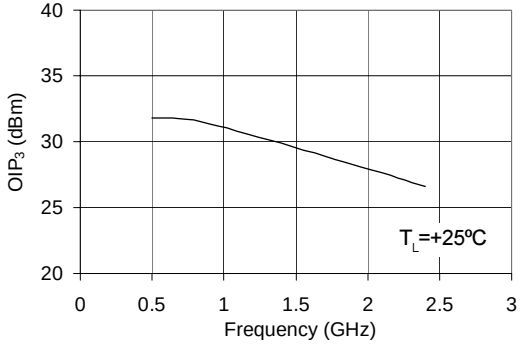

P_{1dB} vs. Frequency

V_D= 3.6 V, I_D= 60 mA (Typ.)

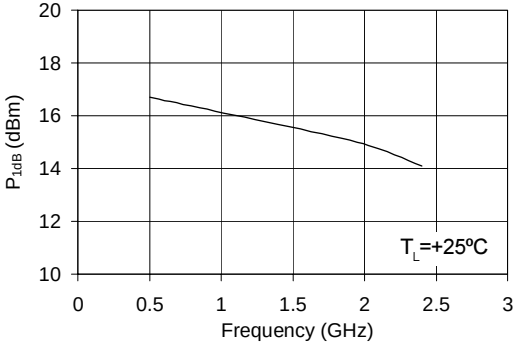

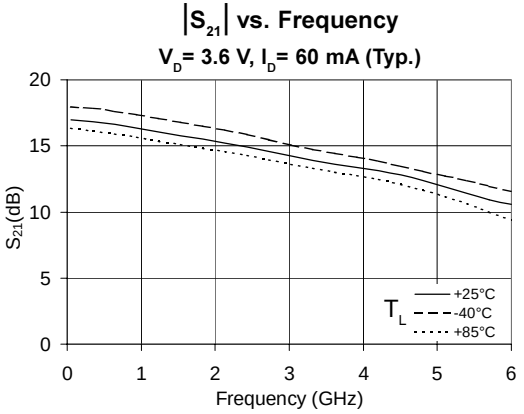

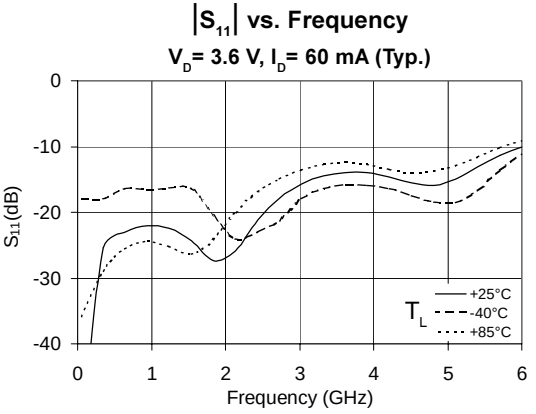

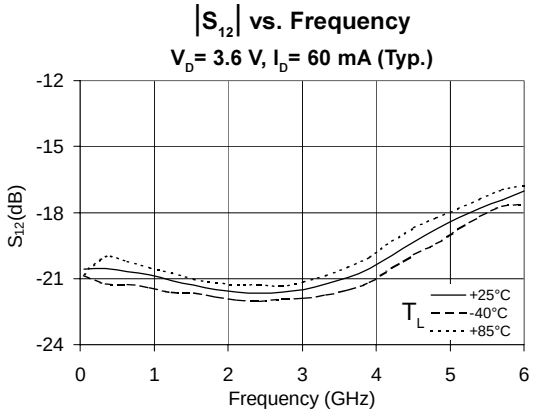

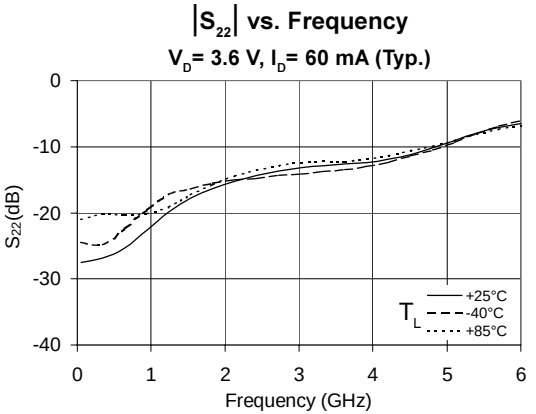

NOTE: Full S-parameter data available at *www.sirenza.com*

Basic Application Circuit

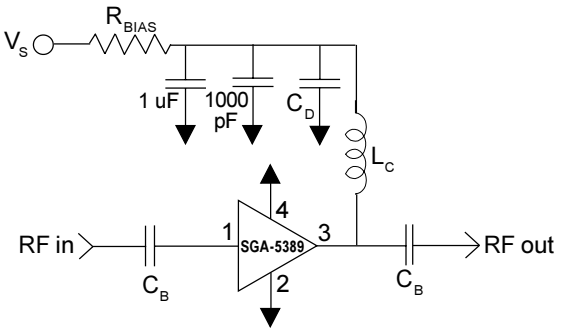

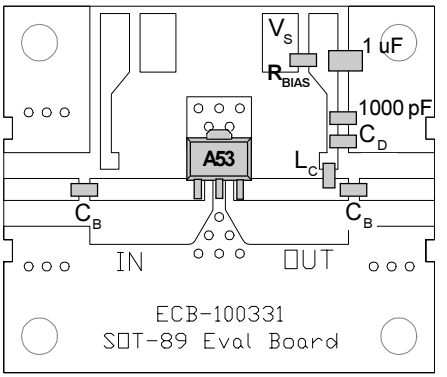

Part Identification Marking

The part will be marked with an "A53" designator on the top surface of the package.



Application Circuit Element Values

Reference Designator	Frequency (Mhz)				
	500	850	1950	2400	3500
C_B	220 pF	100 pF	68 pF	56 pF	39 pF
C_D	100 pF	68 pF	22 pF	22 pF	15 pF
L_C	68 nH	33 nH	22 nH	18 nH	15 nH

Recommended Bias Resistor Values for I_D=60mA R_{BIAS}=(V_S-V_D) / I_D				
Supply Voltage(V_S)	6 V	8 V	10 V	12 V
R_{BIAS}	43 Ω	75 Ω	110 Ω	150 Ω
Note: R_{BIAS} provides DC bias stability over temperature.				

Mounting Instructions

1. Solder the copper pad on the backside of the device package to the ground plane.
2. Use a large ground pad area with many plated through-holes as shown.
3. We recommend 1 or 2 ounce copper. Measurement for this data sheet were made on a 31 mil thick FR-4 board with 1 ounce copper on both sides.

Pin #	Function	Description
1	RF IN	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.
2, 4	GND	Connection to ground. Use via holes for best performance to reduce lead inductance as close to ground leads as possible.
3	RF OUT/ BIAS	RF output and bias pin. DC voltage is present on this pin, therefore a DC blocking capacitor is necessary for proper operation.

Caution: ESD sensitive
Appropriate precautions in handling, packaging and testing devices must be observed.

Part Number Ordering Information

Part Number	Reel Size	Devices/Reel
SGA-5389	7"	1000

PCB Pad Layout

Dimensions in inches [millimeters]

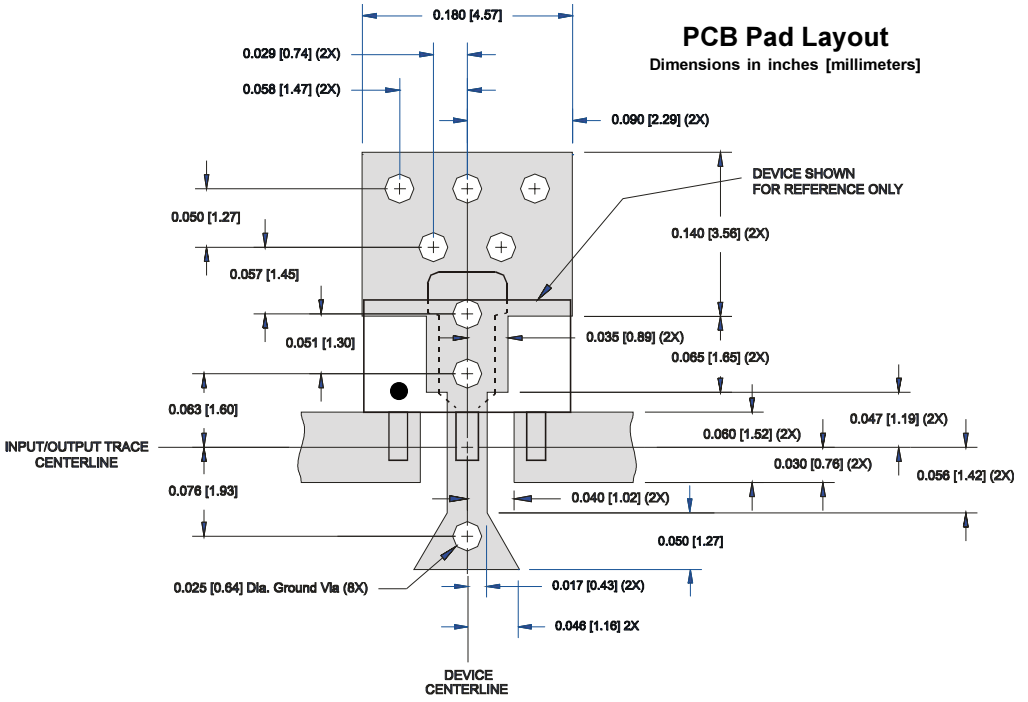

Nominal Package Dimensions

Dimensions in inches [millimeters]
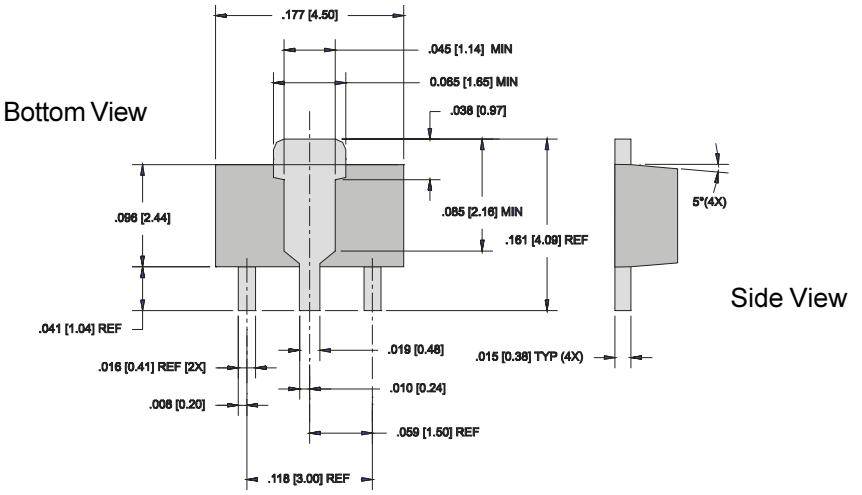
Refer to package drawing posted at *www.sirenza.com* for tolerances.