

CMOS Area Image Sensor


TCM5030T

1/4-inch 330 k-Pixel CMOS Image Sensor
with Built-in ADC for VGA

The TCM5030T is a B/W CMOS image sensor with a built-in ADC for VGA. It outputs a signal for each pixel in sequence every 1/30 s. (This is known as progressive scanning.)

This element is equipped with 492 vertical and 660 horizontal signal pixels, and the image size conforms to the 1/4-inch optical format.

Use of the CMOS process enables low power-consumption using a single power supply voltage. The device is perfect for use as an image input device for machine vision, 2-D barcode use and surveillance camera.

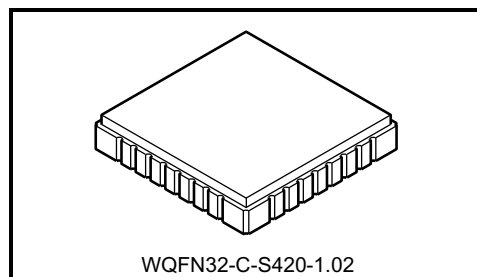

Weight: 0.54 g (typ.)

Features

- Optical size: 1/4-inch optical format
- Total number of pixels: 698 (H) × 502 (V)
- Number of signal pixels: 660 (H) × 492 (V)
- Pixel pitch: 5.6 μm (H) × 5.6 μm (V) (square pixel)
- Image size: 3.696 mm (H) × 2.755 mm (V)
- Package: 32-pin CLCC
- Color filter: N/A. Micro-lens is applicable.
- Frame frequency: 30 Hz
- Power supply voltage: 2.8 V
- Additional functions: Variable speed electronic shutter (1/30 s~1/8000 s)
Gain control amplifier
Internal feedback clamp circuit
Built-in sync. signal generator

Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Power supply voltage	V _{DD}	-0.5~4.2	V
Input voltage	V _{IN}	-0.3~V _{DD} + 0.3	V
Storage temperature	T _{stg}	-30~85	°C


000707EBA2

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.

Recommended Operating Conditions

Characteristics	Symbol	Min	Typ.	Max	Unit
Power supply voltage	V _{AVDD}	2.6	2.8	3.0	V
	V _{DVDD}	2.6	2.8	3.0	
	V _{DVDDIO}	2.3	2.8	3.6	
Input voltage	V _{IN}	0~V _{DVDDIO}			V
Operating temperature	T _{opr}	-20~60			°C

Pin Connection (top view) and Application Circuit

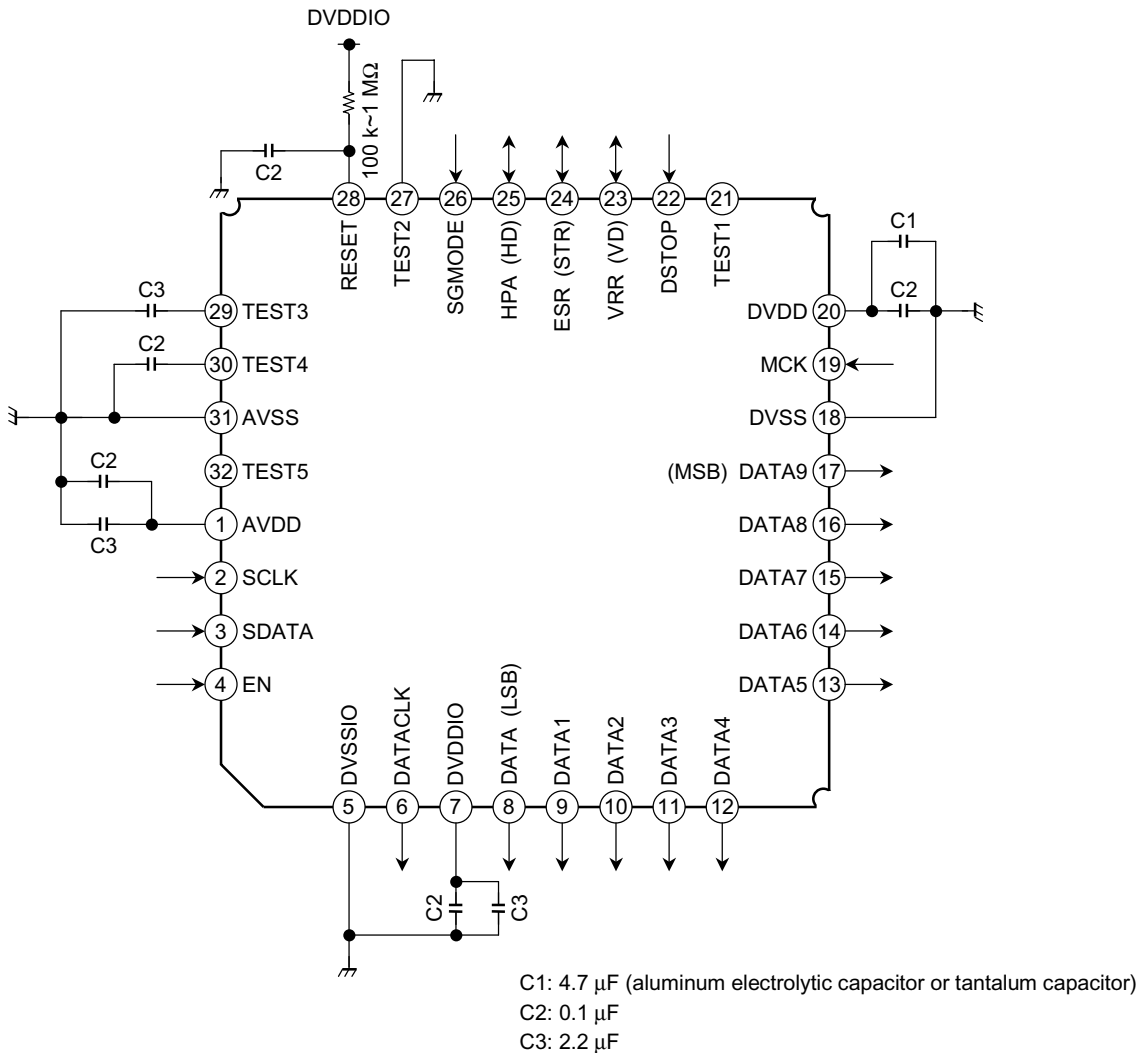

Recommended output impedance of DVDD supply circuit: less than 0.5 Ω at 10 kHz

000707EBA2

• The products described in this document are subject to the foreign exchange and foreign trade laws.
• The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
• The information contained herein is subject to change without notice.


Block Diagram

The SGMODE pin can be used to select either internal or external synchronization.


The SGMODE pin is pulled down. When the SGMODE pin is open, External Synchronization Mode is selected. When the SGMODE pin is High, Internal Synchronization Mode is selected.

In External Synchronization Mode, the HPA and VDD sync. signals and the electronic shutter signal are input from an external source. In Internal Synchronization Mode, HD and VD sync. signals are output and the value of the electronic shutter signal must be set using a command.

(i) External Synchronization Mode

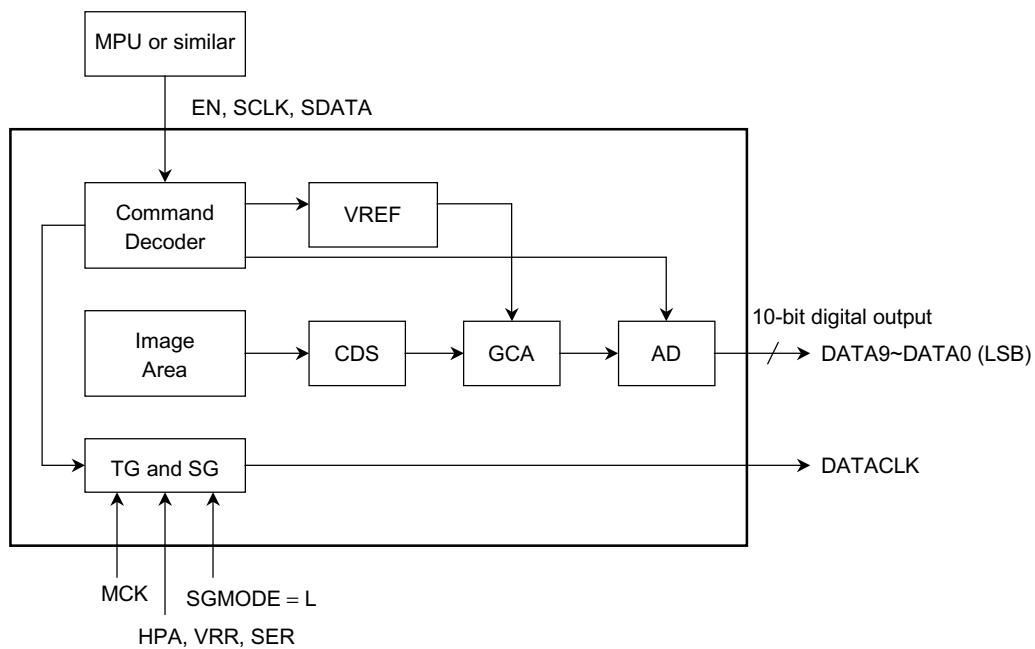

(ii) Internal Synchronization Mode

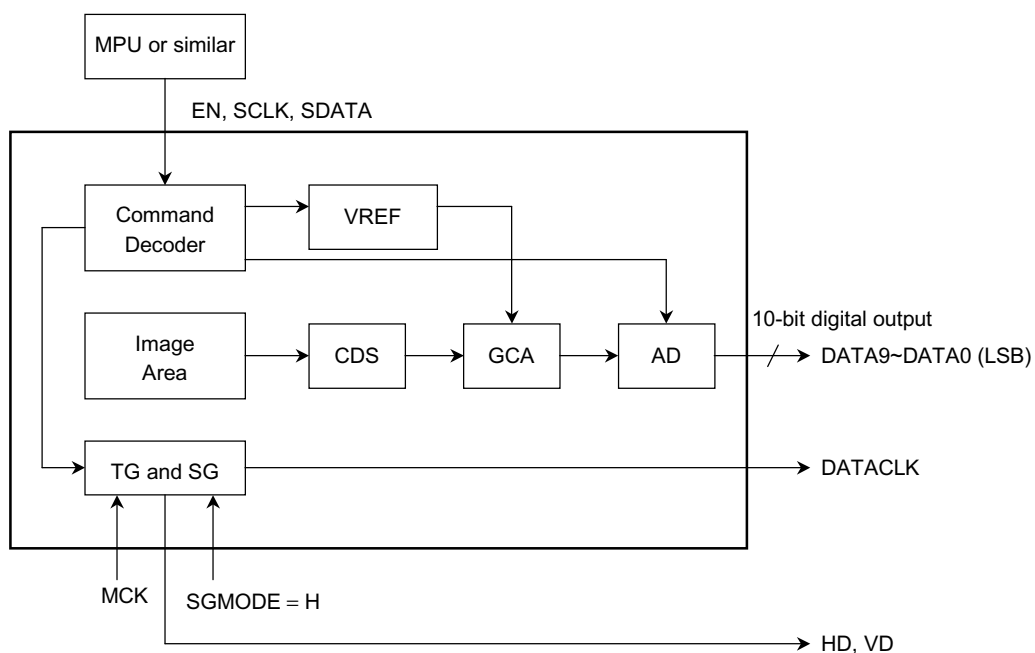

Pin Configuration

Pin No.	Symbol	I/O	Function
1	AVDD	—	Analog power supply. $V_{DD} = 2.8 \text{ V} \pm 0.2 \text{ V}$
2	SCLK	I	Serial clock input for commands
3	SDATA	I	Serial data input for commands
4	EN	I	Data enable input for commands
5	DVSSIO	—	Digital I/O VSS
6	DATACLK	O	Data clock output (half of master clock)
7	DVDDIO	—	Digital I/O power supply
8	DATA0	I/O	AD output (LSB)
9	DATA1	I/O	AD output
10	DATA2	I/O	AD output
11	DATA3	I/O	AD output
12	DATA4	I/O	AD output
13	DATA5	I/O	AD output
14	DATA6	I/O	AD output
15	DATA7	I/O	AD output
16	DATA8	I/O	AD output
17	DATA9	I/O	AD output (MSB)
18	DVSS	—	Digital VSS
19	MCK	I	Master clock input
20	DVDD	—	Digital power supply. $2.8 \text{ V} \pm 0.2 \text{ V}$
21	TEST1	—	TEST terminal 1
22	DSTOP	I	Read stop control input H: Active L: Read stop
23	VRR (VD)	I/O	Vertical timing start pulse input/VD pulse output
24	ESR	I	Electrical shutter start pulse input
25	HPA (HD)	I/O	Horizontal timing start pulse input/HD pulse output
26	SGMODE	I	Internal/External sync select pin Pulled low (0 V) L: HPA, VRR, ESR input H: HD, VD output
27	TEST2	—	TEST terminal 2 Must be connected to GND
28	RESET	I	Parameter Mode reset input Pulled up L: Level H: Active reset
29	TEST3	—	TEST terminal 3 Normally this pin is connected to AVSS (2.2 μF) via a bypass capacitor.
30	TEST4	—	TEST terminal 4 Normally this pin is connected to AVSS (0.1 μF) via a bypass capacitor.
31	AVSS	—	Analog VSS
32	TEST5	—	TEST terminal 5

Optical Characteristics (Note 1)

Characteristics	Symbol	Test Conditions	Min	Typ.	Max	Unit
Sensitivity	R	Standard conditions (Note 2)	250 (479 LSB)	300 (575 LSB)	—	mV
Saturation voltage	V _{SAT}	Saturation exposure Output	500 (959 LSB)	—	—	mV
Blooming margin	BLM	Light intensity is 500 times standard conditions (Note 3)	No blooming			—
S/N (dark)	S/N	Output	55	57	—	dB
Decay lag	LAG	Output = 20 mV	—	—	2	mV

Note 1: Amplifier gain setting: $\times 1$ (0dB)
Actual digital output includes black level (64 LSB).


Note 2: Standard conditions for measuring sensitivity

- 100 nt
- Other conditions are based on Note 3.

Note 3: Standard conditions (TC = 60°C centigrade) as follows

- Light source: 3200 K, halogen light box
- Optical filter: IR cut filter (cut in half at 650 nm)
- Optical lense: Fujinon f = 25 mm, F number 2.8
- Standard signal level: Output = 250 mV
- Driving conditions: frame rate = 30 fps, electronic shutter OFF

The analog output level can be estimated as follows when a $\times 1$ gain DA converter (500 mVpp) is used.

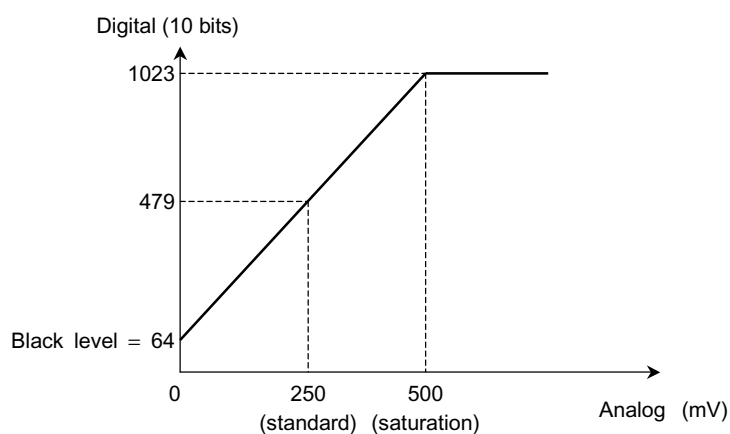

Optical lens performance influences sensor characteristics.

- (1) F number: Less than F2.8 is recommended to maintain a high level of sensitivity and an acceptable S/N ratio.
- (2) Exit pupil may influence shading level.

Electrical Characteristics

DC Characteristics (Ta = 25°C, VDD = 2.8 V)

Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
High level input voltage	V _{IH}	—	(Note 4)	2	—	—	V
Low level input voltage	V _{IL}	—	(Note 4)	—	—	0.8	V
High level input current	I _{IH}	—	V _{IN} = V _{DD} (Note 7)	150	—	250	μA
			(Note 4 except DSTOP)	−10	—	10	
Low level input current	I _{IL}	—	V _{IN} = V _{SS} (Note 4 except SGMODE)	−10	—	10	μA
			V _{IN} = V _{SS} (Note 6)	−220	—	−80	
High level output voltage	V _{OH}	—	I _{OH} = −4 mA (Note 5)	V _{DD} − 0.4	—	—	V
Low level output voltage	V _{OL}	—	I _{OL} = 4 mA (Note 5)	—	—	0.4	V
Power supply current	I _{DD}	—	30fps	—	30	—	mA

Note 4: DSTOP, VRR, ESR, HPA, SGMODE, RESET, SCLK, SDATA, EN, MCK

Note 5: VD, STR, HD, DATACLK, DATA0~DATA9

Note 6: DSTOP

Note 7: SGMODE



AC Characteristics (Ta = 25°C, VDD = 2.8 V)

Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Timing margin for input pulse	t _{m1}	—	Based on MCK (Note 8)	−10	—	10	ns
	t _{m2}	—		−1/4 SCLK	—	1/4 SCLK	
	t _{m3}	—		−1/4 SCLK	—	1/4 SCLK	
Output delay time	t _{pd1}	—	Based on MCK, C = 15 pF (Note 9)	—	—	20	ns
	t _{pd2}	—		—	—	30	
	t _{pd3}	—		—	—	30	
Command clock frequency	f _{sclk}	—	(Note 10)	—	—	6	MHz


Note 8: DSTOP, VRR, ESR, HPA,

Note 9: DATACLK, DATA0~DATA9

Note 10: SCLK

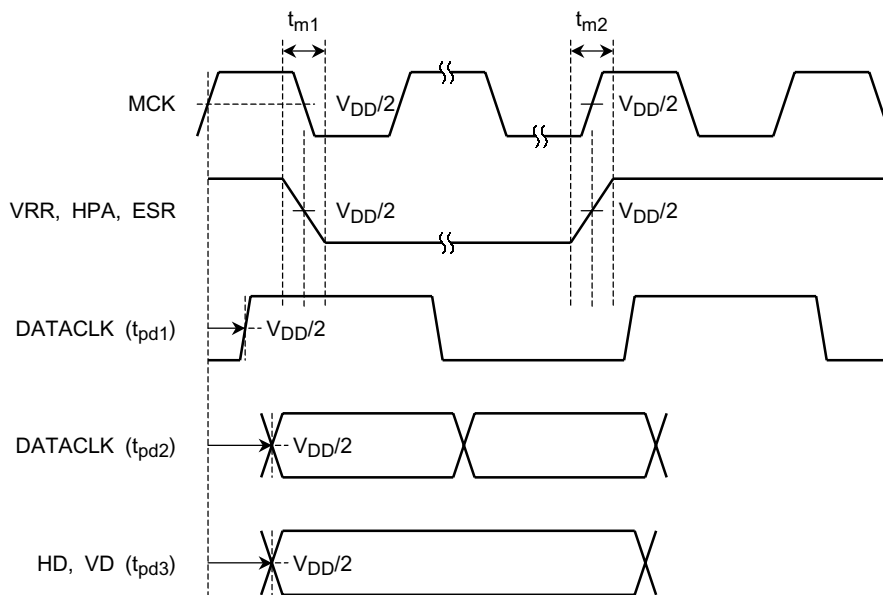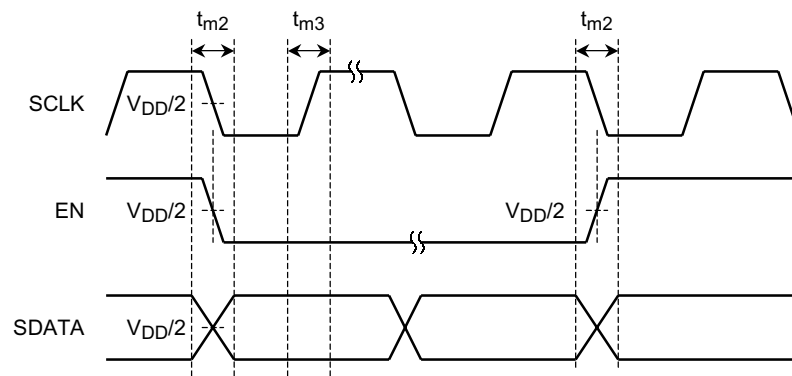Inputs/Outputs Other than Commands

Command Inputs

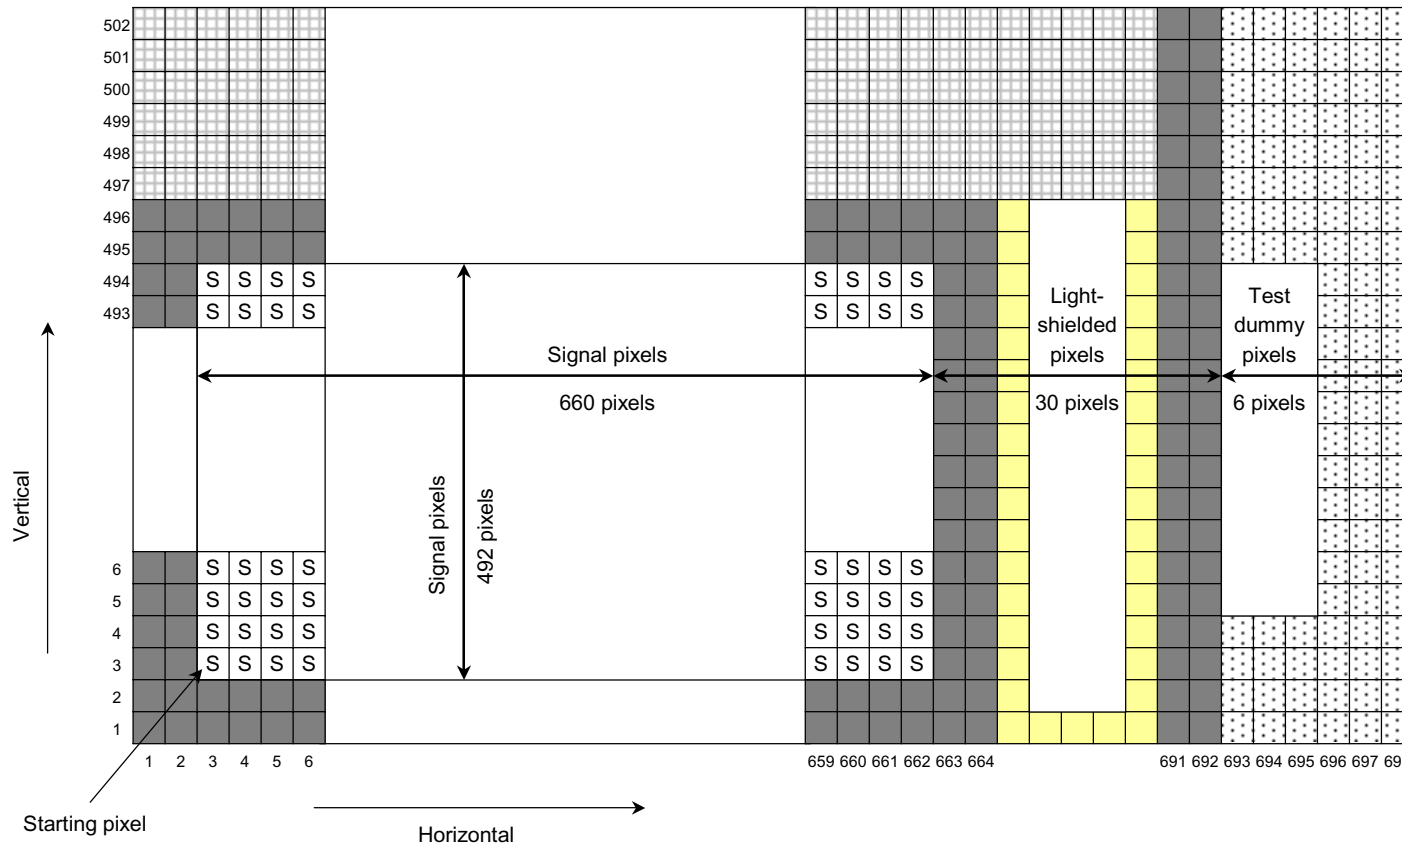
Pixel Configuration



Definition of pixels S: Signal pixel

Light-shielded dummy pixels

Light-shielded pixels

Test dummy pixels


Dummy pixels

Light-shielded pixels are used as optical black reference.

Command Input

- (1) Amplifier gain
- (2) Electronic shutter speed in Internal Synchronization Mode
- (3) Monitoring mode

Timing Diagram

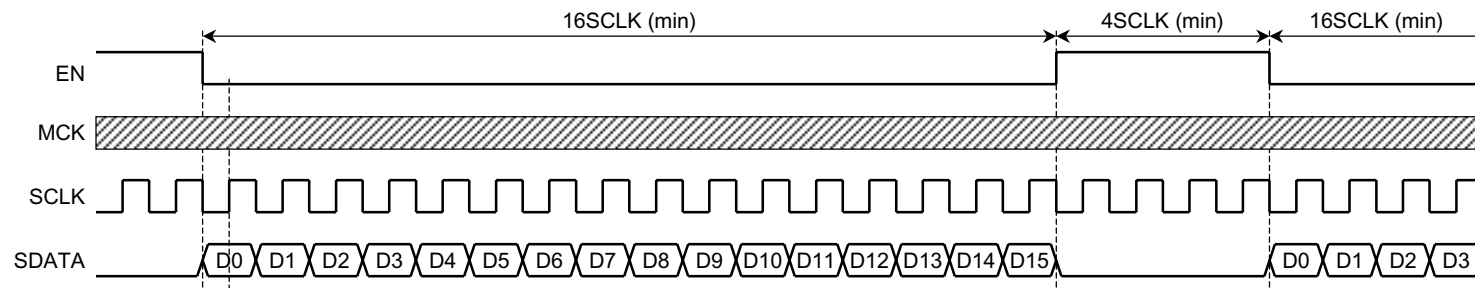

Settings

Item	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	Note
Pixel gain	0	0	0	0	MSB DATA (10 bit) LSB										×	×	Normally same value is set.
Pixel gain	0	0	0	1	MSB DATA (10 bit) LSB										×	×	Normally same value is set.
Pixel gain	0	0	1	0	MSB DATA (10 bit) LSB										×	×	Normally same value is set.
Pixel gain	0	0	1	1	MSB DATA (10 bit) LSB										×	×	Normally same value is set.
Electronic shutter speed	1	0	1	0	MSB DATA (10 bit) LSB										×	×	From 2H to 524H
Monitoring mode	1	1	1	1	0	0/1	0	0	0	0	0	0	0	0	0	0	0: Normal 1: Monitoring mode

Command Input Settings

(1) Amplifier gain setting

◆ Examples

Settings										Value	Gain Factor
1	1	1	1	1	1	1	1	1	1	1023	0.75 (min)
1	1	0	0	0	0	0	0	0	0	768	1 (default)
0	1	1	0	0	0	0	0	0	0	384	2
0	0	1	1	0	0	0	0	0	0	192	4
0	0	0	1	1	0	0	0	0	0	96	8
0	0	0	1	0	0	1	1	0	1	77	10 (recommended max)

(2) Electronic shutter speed in Internal Synchronization Mode

◆ Examples

Settings										Storage Time
0	0	0	0	0	0	0	0	0	0	OFF (default)
0	0	0	0	0	0	0	0	0	1	2H
0	0	0	0	0	0	0	0	1	0	3H
1	1	1	1	1	1	1	1	1	1	1
1	0	0	0	0	0	1	0	1	0	523H
1	0	0	0	0	0	1	0	1	1	524H


(3) Monitoring mode

0: Progressive scanning (Normal Mode)


1: Alternate line pairs scanned (Monitoring Mode)

External Synchronization Mode

Vertical period

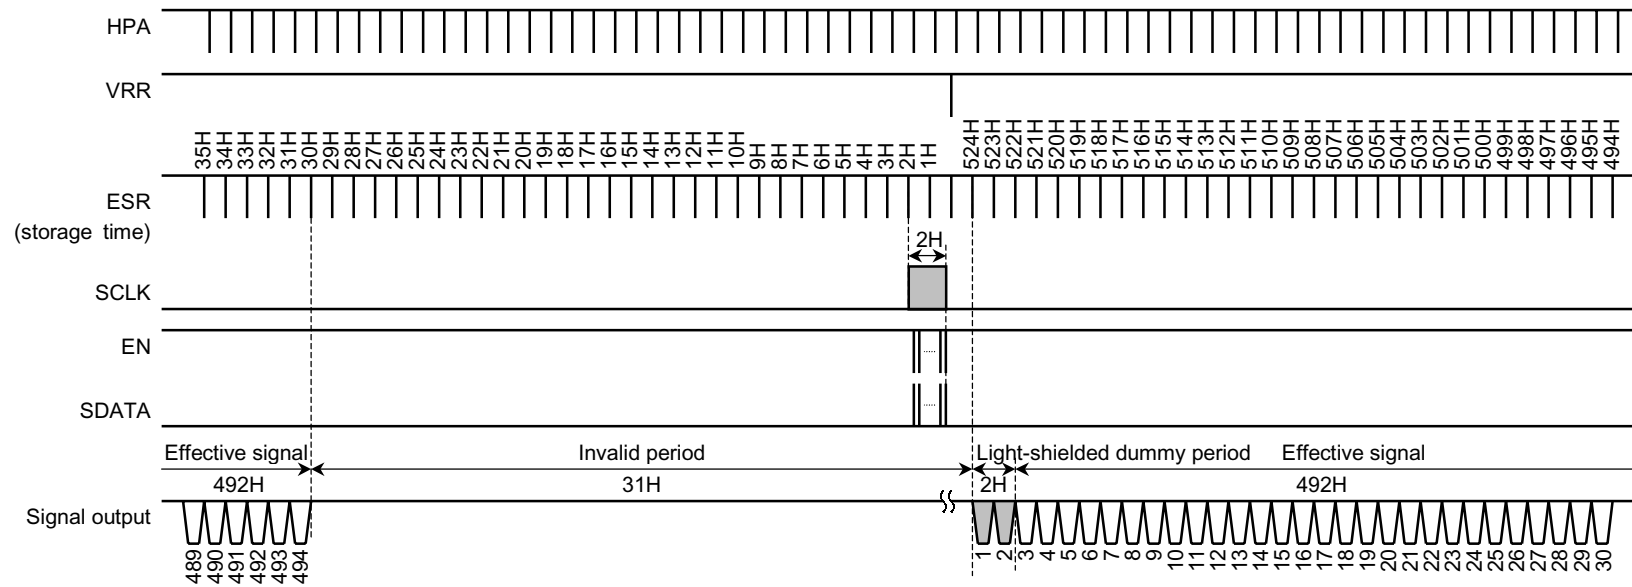


Horizontal period

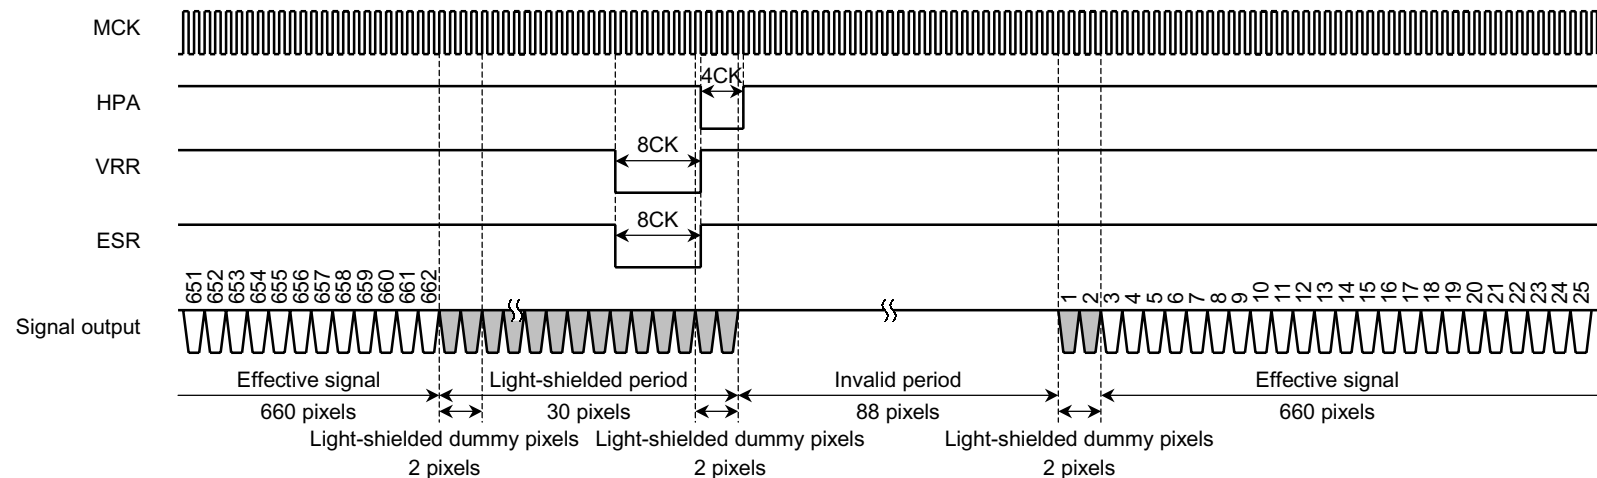


External Synchronization and Monitoring Mode

Vertical period

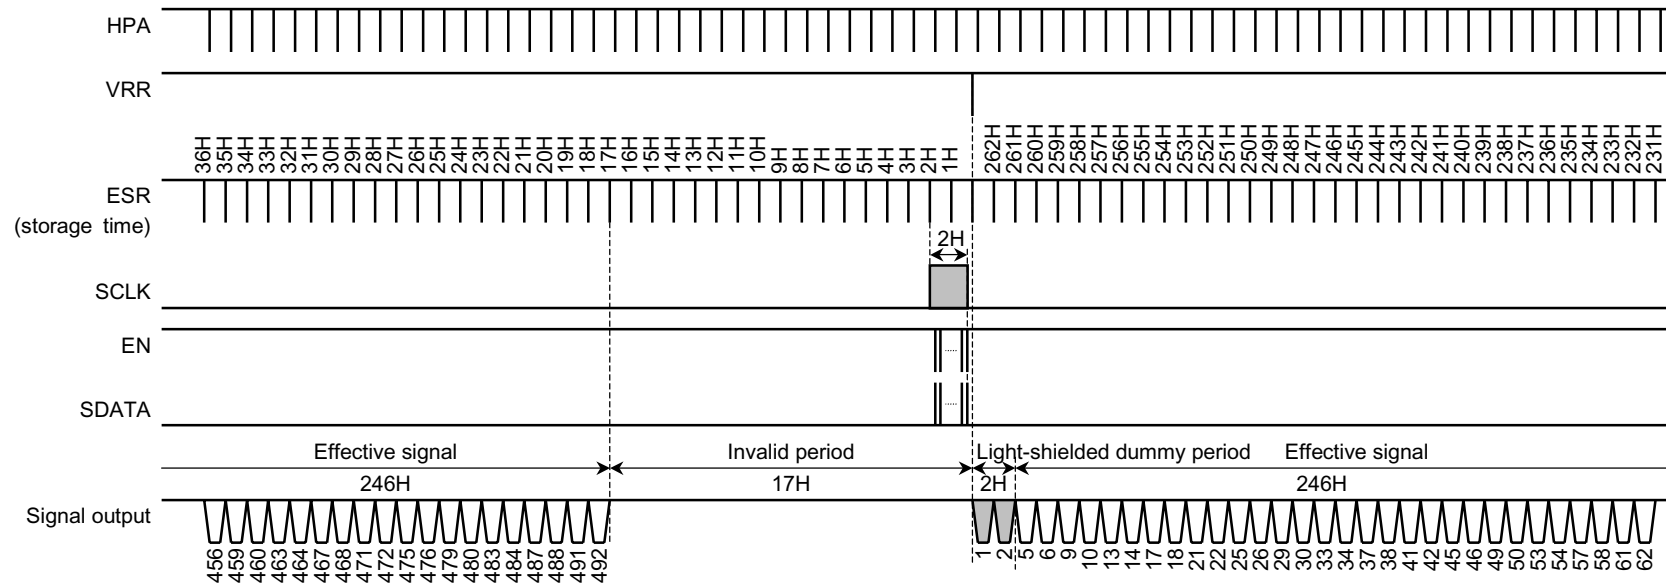


Horizontal period

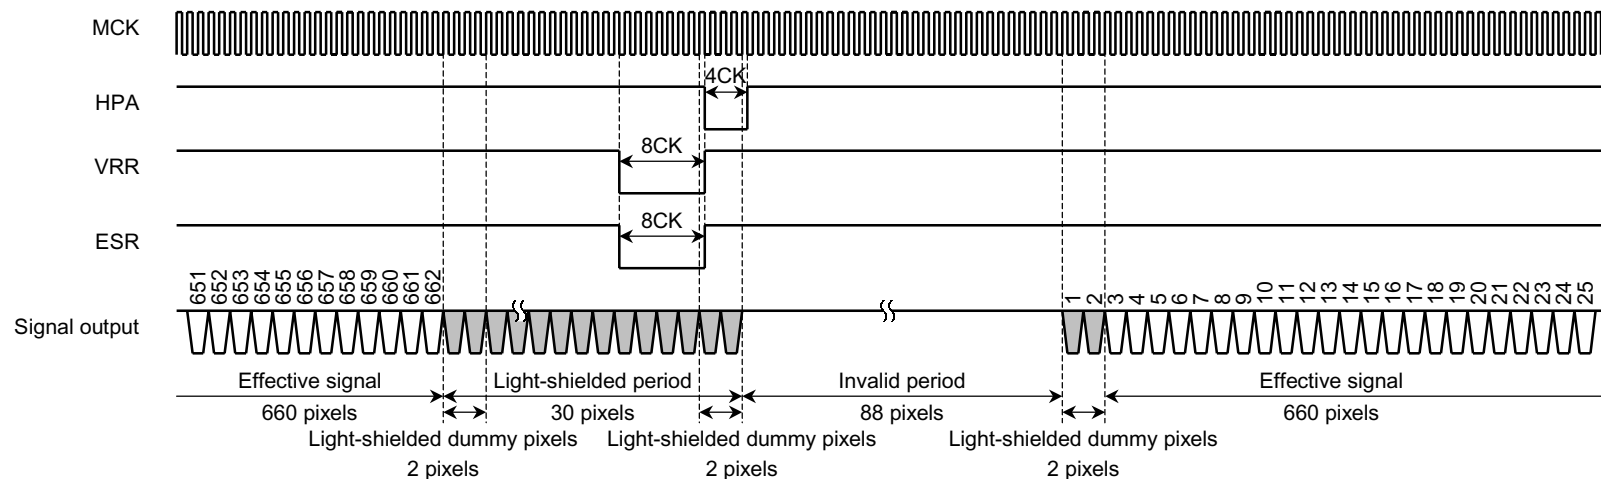


Internal Synchronization and Normal Mode

Vertical period

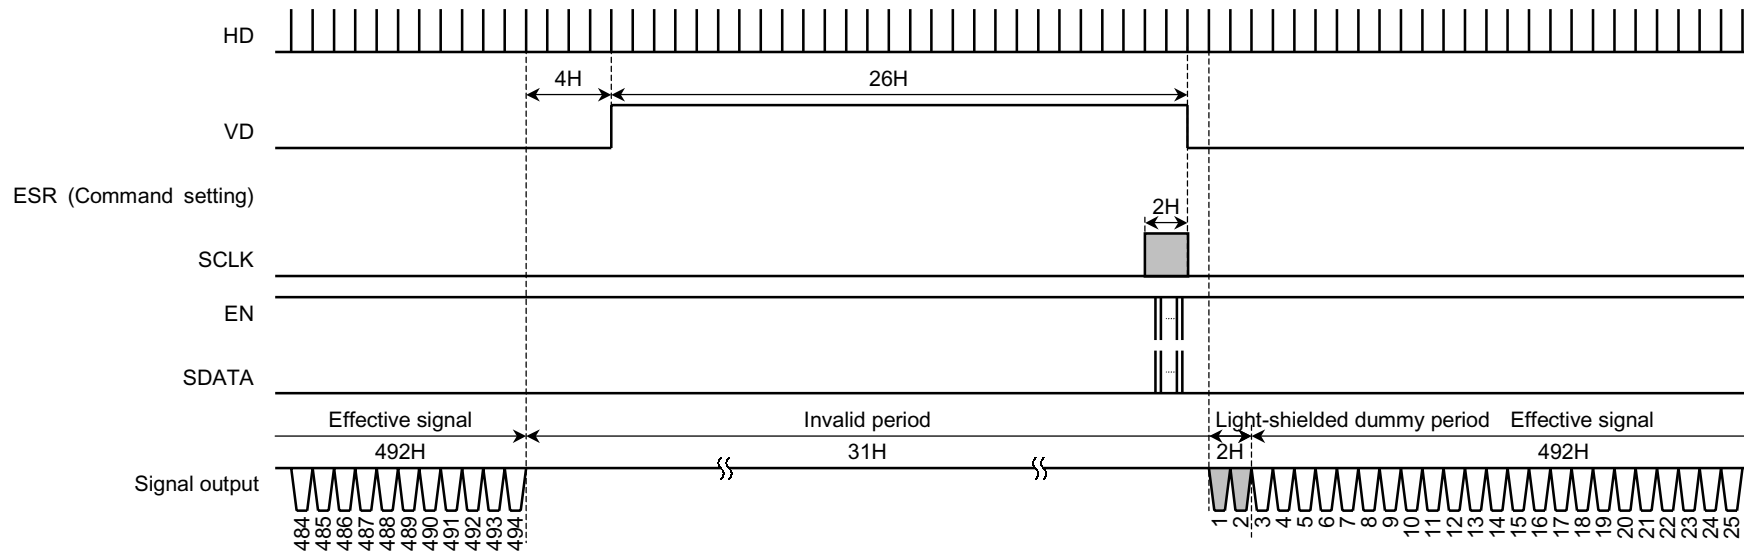


Horizontal period

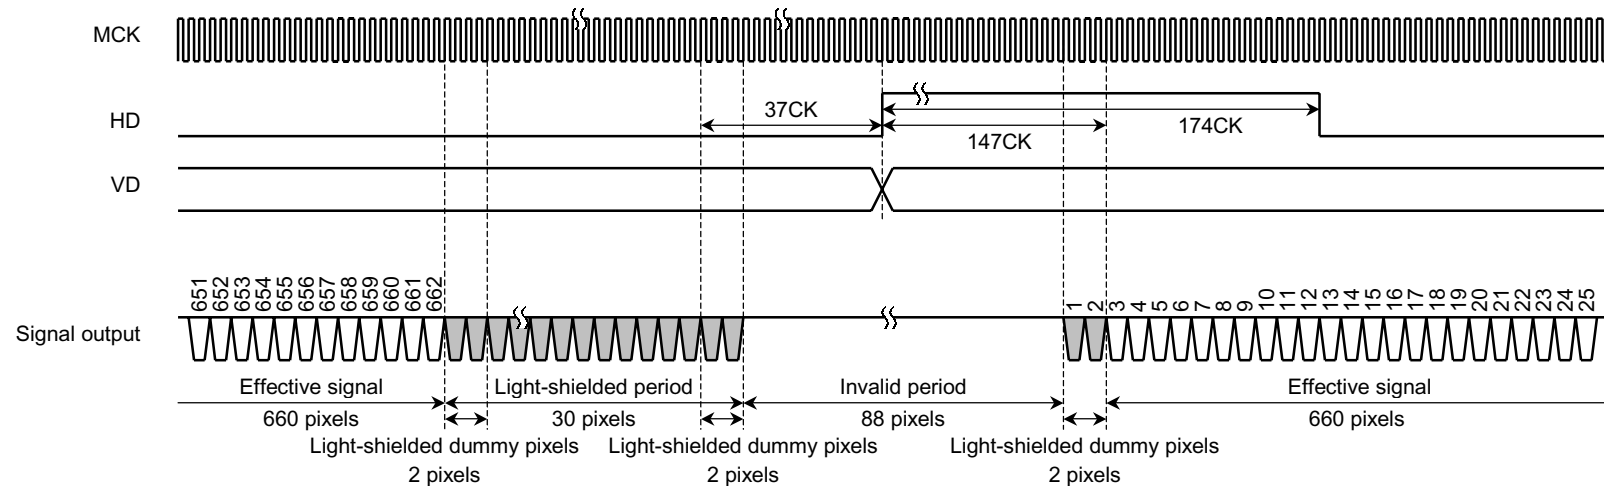



Internal Synchronization and Monitoring Mode

Vertical period

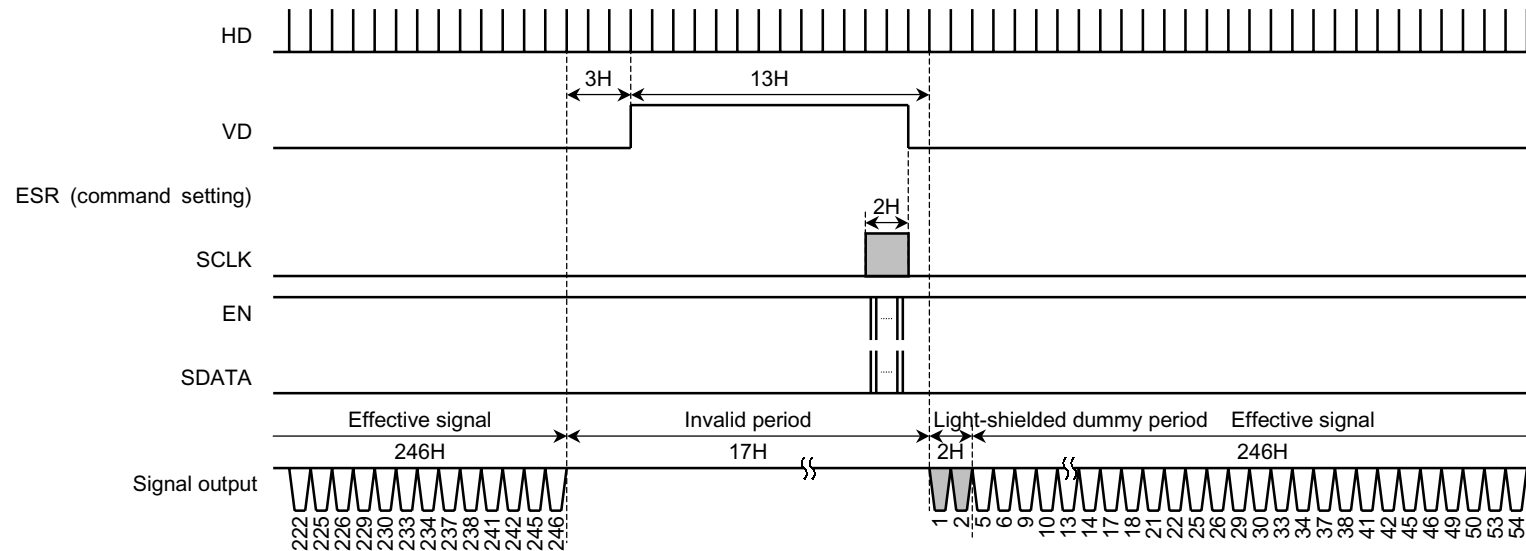

Horizontal period

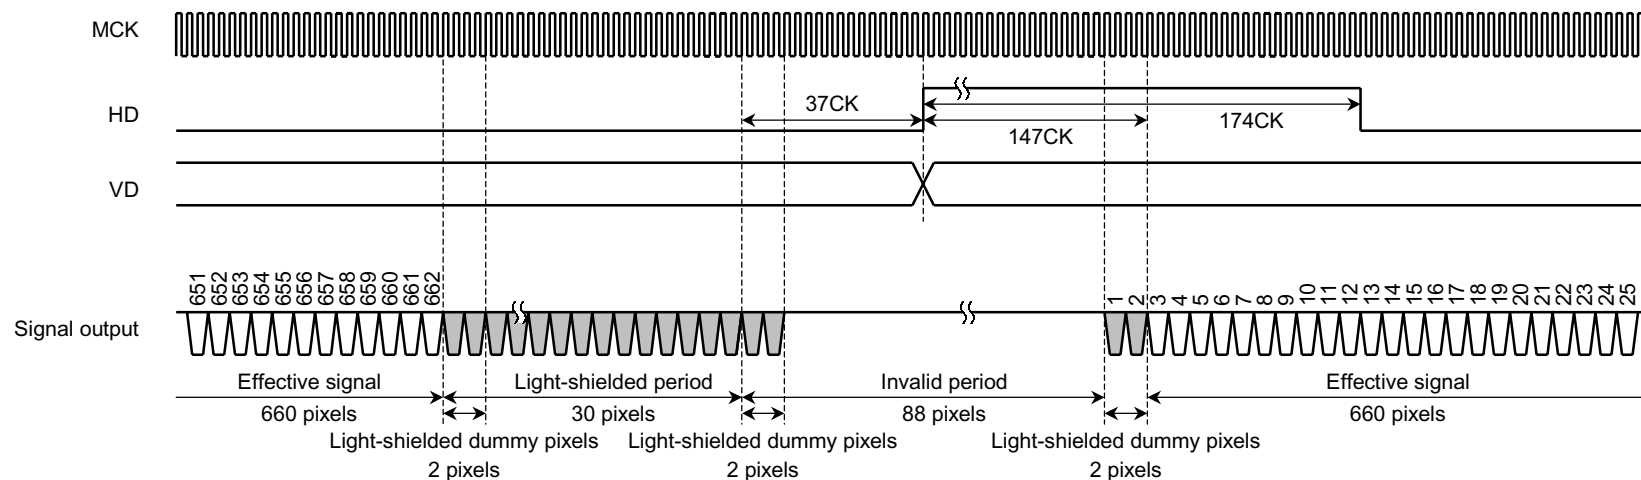


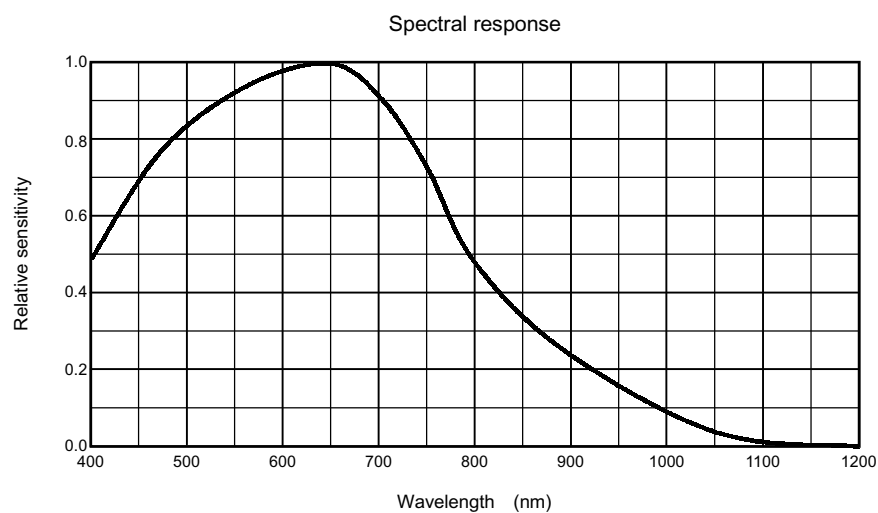

Package Dimensions

WQFN32-C-S420-1.02(A)

Unit: mm

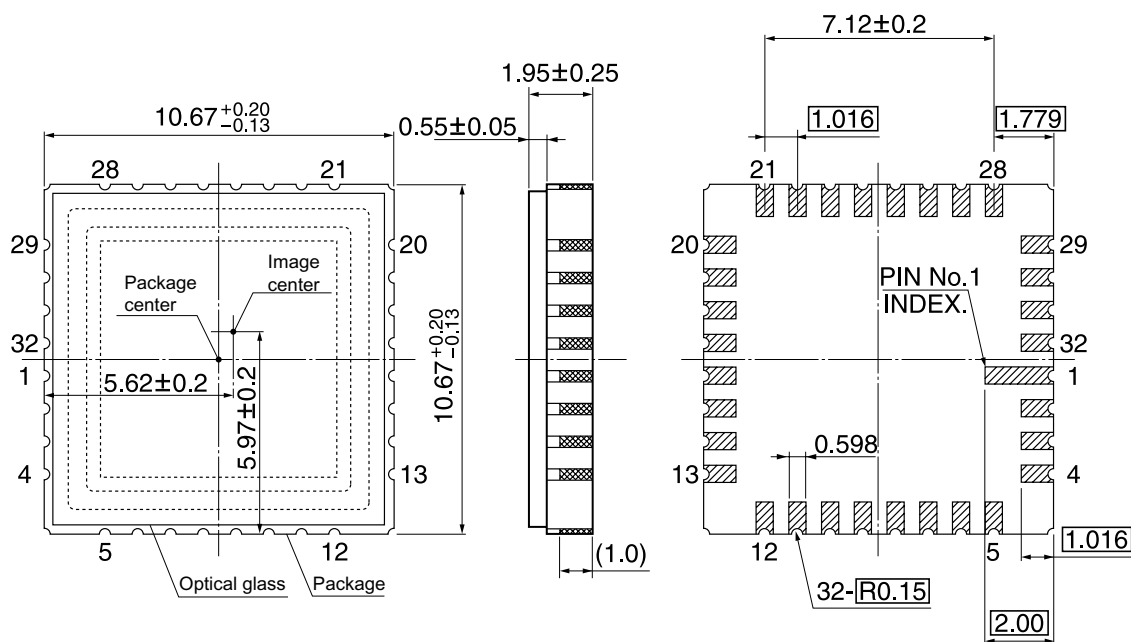

- Note)
- Glass size: 10.10 ± 0.05 mm, $t = 0.55 \pm 0.05$ mm
 - Glass refractive index: $n = 1.52$ mm
 - Sensor chip direction of rotation accuracy: $\theta = 1.0^\circ$ (max)
 - The distance from sensor photosensitive face to package rear face: 1.06 ± 0.08 mm

Weight: 0.54 g (typ.)