


TC74VCX157FT

LOW-VOLTAGE QUAD 2-CHANNEL MULTIPLEXER WITH 3.6 V TOLERANT INPUTS AND OUTPUTS

The TC74VCX157FT is a high performance CMOS MULTIPLEXER. Designed for use in 1.8, 2.5 or 3.3 Volt systems, it achieves high speed operation while maintaining the CMOS low power dissipation. It is also designed with over voltage tolerant inputs and outputs up to 3.6 V. It consists of four 2-input digital multiplexers with common select and strobe inputs. When the STROBE input is held "H" level, selection of data is inhibited and all the outputs become "L" level. The SELECT decoding determines whether the A or B inputs get routed to their corresponding Y outputs. All inputs are equipped with protection circuits against static discharge.

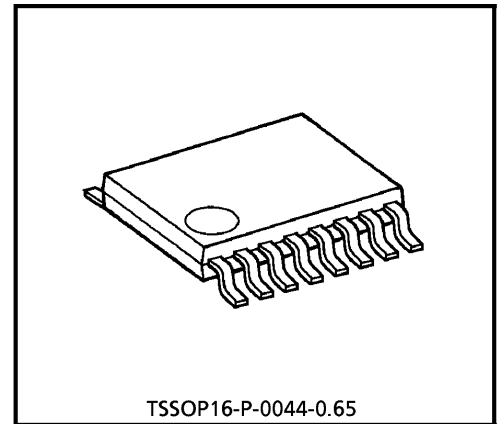


Weight : 0.06 g (Typ.)

FEATURES

- Low Voltage Operation : $V_{CC} = 1.8 \sim 3.6 \text{ V}$
- High Speed Operation : $t_{pd} = 3.0 \text{ ns (max)}$ at $V_{CC} = 3.0 \sim 3.6 \text{ V}$
 $t_{pd} = 3.5 \text{ ns (max)}$ at $V_{CC} = 2.3 \sim 2.7 \text{ V}$
 $t_{pd} = 7.0 \text{ ns (max)}$ at $V_{CC} = 1.8 \text{ V}$
- Output Current : $I_{OH}/I_{OL} = \pm 24 \text{ mA (min)}$ at $V_{CC} = 3.0 \text{ V}$
 $I_{OH}/I_{OL} = \pm 18 \text{ mA (min)}$ at $V_{CC} = 2.3 \text{ V}$
 $I_{OH}/I_{OL} = \pm 6 \text{ mA (min)}$ at $V_{CC} = 1.8 \text{ V}$
- Latch-up Performance : $\pm 300 \text{ mA}$
- ESD Performance : Human Body Model $> \pm 2000 \text{ V}$
Machine Model $> \pm 200 \text{ V}$
- Package : TSSOP
(Thin Shrink Small Outline Package)
- Power Down Protection is provided on all inputs and outputs.

PIN ASSIGNMENT

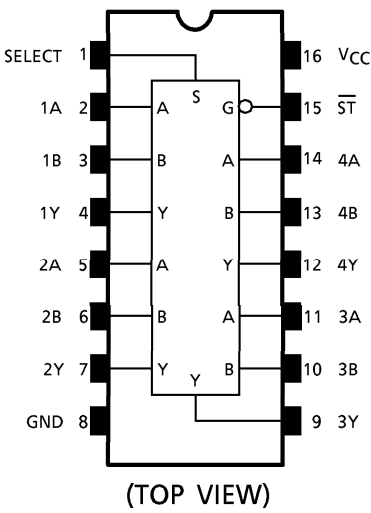


TRUTH TABLE


INPUTS				OUTPUTS
\overline{ST}	SELECT	A	B	Y
H	X	X	X	L
L	L	L	X	L
L	L	H	X	H
L	H	X	L	L
L	H	X	H	H

X : Don't Care

IEC LOGIC SYMBOL

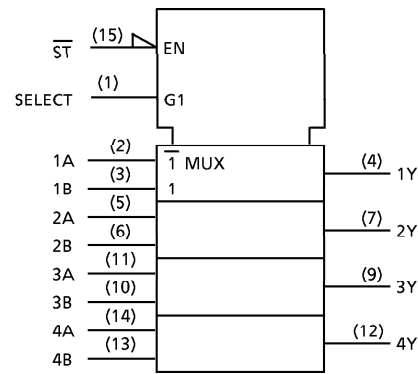

SYSTEM DIAGRAM

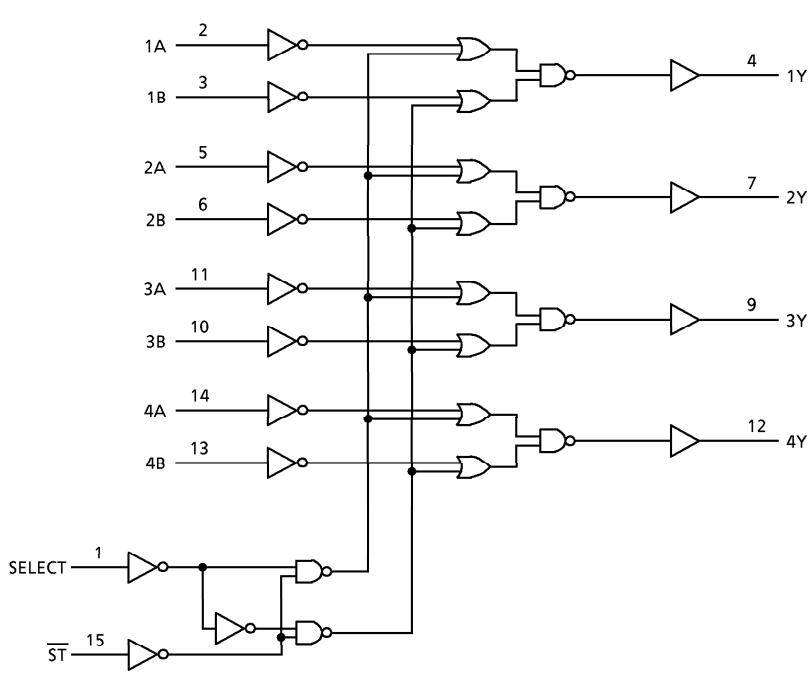

MAXIMUM RATINGS

PARAMETER	SYMBOL	RATING	UNIT
Power Supply Voltage	V_{CC}	$-0.5 \sim 4.6$	V
DC Input Voltage	V_{IN}	$-0.5 \sim 4.6$	V
DC Output Voltage	V_{OUT}	$-0.5 \sim 4.6$ (Note 1)	V
		$-0.5 \sim V_{CC} + 0.5$ (Note 2)	
Input Diode Current	I_{IK}	-50	mA
Output Diode Current	I_{OK}	± 50 (Note 3)	mA
DC Output Current	I_{OUT}	± 50	mA
Power Dissipation	P_D	180	mW
DC V_{CC} / Ground Current	I_{CC} / I_{GND}	± 100	mA
Storage Temperature	T_{stg}	$-65 \sim 150$	$^{\circ}\text{C}$

(Note 1): $V_{CC} = 0\text{ V}$

(Note 2): High or Low State. I_{OUT} absolute maximum rating must be observed.

(Note 3): $V_{OUT} < \text{GND}$, $V_{OUT} > V_{CC}$

RECOMMENDED OPERATING RANGE

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V_{CC}	1.8~3.6	V
		1.2~3.6 (Note 4)	
Input Voltage	V_{IN}	$-0.3 \sim 3.6$	V
Output Voltage	V_{OUT}	0~3.6 (Note 5)	V
		0~ V_{CC} (Note 6)	
Output Current	I_{OH} / I_{OL}	± 24 (Note 7)	mA
		± 18 (Note 8)	
		± 6 (Note 9)	
Operating Temperature	T_{opr}	$-40 \sim 85$	$^{\circ}\text{C}$
Input Rise And Fall Time	dt / dv	0~10 (Note 10)	ns / V

(Note 4): Data Retention Only

(Note 5): $V_{CC} = 0\text{ V}$

(Note 6): High or Low State

(Note 7): $V_{CC} = 3.0 \sim 3.6\text{ V}$

(Note 8): $V_{CC} = 2.3 \sim 2.7\text{ V}$

(Note 9): $V_{CC} = 1.8\text{ V}$

(Note 10): $V_{IN} = 0.8 \sim 2.0\text{ V}$, $V_{CC} = 3.0\text{ V}$

ELECTRICAL CHARACTERISTICS

DC Characteristics (Ta = -40~85°C, 2.7 V < V_{CC} ≤ 3.6 V)

PARAMETER		SYMBOL	TEST CONDITION		V _{CC} (V)	Min	Max	UNIT
Input Voltage	“H” Level	V _{IH}			2.7~3.6	2.0	—	V
	“L” Level	V _{IL}			2.7~3.6	—	0.8	
Output Voltage	“H” Level	V _{OH}	V _{IN} = V _{IH} or V _{IL}	I _{OH} = - 100 μA	2.7~3.6	V _{CC} - 0.2	—	V
				I _{OH} = - 12 mA	2.7	2.2	—	
				I _{OH} = - 18 mA	3.0	2.4	—	
				I _{OH} = - 24 mA	3.0	2.2	—	
	“L” Level	V _{OL}	V _{IN} = V _{IH} or V _{IL}	I _{OL} = 100 μA	2.7~3.6	—	0.2	
				I _{OL} = 12 mA	2.7	—	0.4	
				I _{OL} = 18 mA	3.0	—	0.4	
				I _{OL} = 24 mA	3.0	—	0.55	
Input Leakage Current		I _{IN}	V _{IN} = 0~3.6 V	2.7~3.6	—	± 5.0	μA	
Power Off Leakage Current		I _{OFF}	V _{IN} , V _{OUT} = 0~3.6 V	0	—	10.0	μA	
Quiescent Supply Current		I _{CC}	V _{IN} = V _{CC} or GND	2.7~3.6	—	20.0	μA	
			V _{CC} ≤ V _{IN} ≤ 3.6 V	2.7~3.6	—	± 20.0		
Increase In I _{CC} Per Input		ΔI _{CC}	V _{IH} = V _{CC} - 0.6 V	2.7~3.6	—	750	μA	

ELECTRICAL CHARACTERISTICS

DC Characteristics (Ta = -40~85°C, 2.3 V ≤ V_{CC} ≤ 2.7 V)

PARAMETER		SYMBOL	TEST CONDITION			V _{CC} (V)	Min	Max	UNIT
Input Voltage	“H” Level	V _{IH}				2.3~2.7	1.6	—	V
	“L” Level	V _{IL}				2.3~2.7	—	0.7	
Output Voltage	“H” Level	V _{OH}	V _{IN} = V _{IH} or V _{IL}	I _{OH} = - 100 μA	2.3~2.7	V _{CC} - 0.2	—	V	
				I _{OH} = - 6 mA	2.3	2.0	—		
				I _{OH} = - 12 mA	2.3	1.8	—		
				I _{OH} = - 18 mA	2.3	1.7	—		
	“L” Level	V _{OL}	V _{IN} = V _{IH} or V _{IL}	I _{OL} = 100 μA	2.3~2.7	—	0.2		
				I _{OL} = 12 mA	2.3	—	0.4		
				I _{OL} = 18 mA	2.3	—	0.6		
Input Leakage Current		I _{IN}	V _{IN} = 0~3.6 V			2.3~2.7	—	± 5.0	μA
Power Off Leakage Current		I _{OFF}	V _{IN} , V _{OUT} = 0~3.6 V			0	—	10.0	μA
Quiescent Supply Current		I _{CC}	V _{IN} = V _{CC} or GND			2.3~2.7	—	20.0	μA
			V _{CC} ≤ V _{IN} ≤ 3.6 V			2.3~2.7	—	± 20.0	

ELECTRICAL CHARACTERISTICS

DC Characteristics ($T_a = -40 \sim 85^\circ\text{C}$, $1.8\text{ V} \leq V_{CC} < 2.3\text{ V}$)

PARAMETER		SYMBOL	TEST CONDITION		V _{CC} (V)	Min	Max	UNIT
Input Voltage	“H” Level	V _{IH}			1.8~2.3	0.7 × V _{CC}	—	V
	“L” Level	V _{IL}			1.8~2.3	—	0.2 × V _{CC}	
Output Voltage	“H” Level	V _{OH}	V _{IN} = V _{IH} or V _{IL}	I _{OH} = −100 μA	1.8	V _{CC} − 0.2	—	V
				I _{OH} = −6 mA	1.8	1.4	—	
	“L” Level	V _{OL}	V _N = V _{IH} or V _{IL}	I _{OL} = 100 μA	1.8	—	0.2	
				I _{OL} = 6 mA	1.8	—	0.3	
Input Leakage Current		I _{IIN}	V _{IN} = 0~3.6 V		1.8	—	± 5.0	μA
Power Off Leakage Current		I _{OFF}	V _{IN} , V _{OUT} = 0~3.6 V		0	—	10.0	μA
Quiescent Supply Current		I _{CC}	V _{IN} = V _{CC} or GND		1.8	—	20.0	μA
			V _{CC} ≤ V _{IN} ≤ 3.6 V		1.8	—	± 20.0	

AC Characteristics ($T_a = -40 \sim 85^\circ\text{C}$, Input $t_r = t_f = 2.0\text{ ns}$, $C_L = 30\text{ pF}$, $R_L = 500\text{ }\Omega$)

PARAMETER		SYMBOL	TEST CONDITION		V_{CC} (V)	Min	Max	UNIT
Propagation Delay Time (A, B-Y)	t_{PLH} t_{PHL}	(Fig.1, 2)			1.8	1.0	7.0	ns
					2.5 ± 0.2	0.8	3.5	
					3.3 ± 0.3	0.6	3.0	
Propagation Delay Time (SELECT-Y)	t_{PLH} t_{PHL}	(Fig.1, 2)			1.8	1.0	9.0	ns
					2.5 ± 0.2	0.8	4.5	
					3.3 ± 0.3	0.6	3.5	
Propagation Delay Time ($\overline{\text{ST}}$ -Y)	t_{PLH} t_{PHL}	(Fig.1, 2)			1.8	1.0	9.0	ns
					2.5 ± 0.2	0.8	4.5	
					3.3 ± 0.3	0.6	3.5	
Output To Output Skew	t_{osLH} t_{osHL}	(Note 11)			1.8	—	0.5	ns
					2.5 ± 0.2	—	0.5	
					3.3 ± 0.3	—	0.5	

For $C_L = 50\text{ pF}$, add approximately 300 ps to the AC maximum specification.

(Note 11): Parameter guaranteed by design.

$$(t_{osLH} = |t_{pLHm} - t_{pLHn}|, t_{osHL} = |t_{pHLm} - t_{pHLn}|)$$

Dynamic Switching Characteristics ($T_a = 25^\circ\text{C}$, Input $t_r = t_f = 2.0\text{ ns}$, $C_L = 30\text{ pF}$)

PARAMETER	SYMBOL	TEST CONDITION	V _{CC} (V)	Typ.	UNIT
Quiet Output Maximum Dynamic V _{OL}	V _{OLP}	V _{IH} = 1.8 V, V _{IL} = 0 V (Note 12)	1.8	0.25	V
		V _{IH} = 2.5 V, V _{IL} = 0 V (Note 12)	2.5	0.6	
		V _{IH} = 3.3 V, V _{IL} = 0 V (Note 12)	3.3	0.8	
Quiet Output Minimum Dynamic V _{OL}	V _{OLV}	V _{IH} = 1.8 V, V _{IL} = 0 V (Note 12)	1.8	-0.25	V
		V _{IH} = 2.5 V, V _{IL} = 0 V (Note 12)	2.5	-0.6	
		V _{IH} = 3.3 V, V _{IL} = 0 V (Note 12)	3.3	-0.8	
Quiet Output Minimum Dynamic V _{OH}	V _{OHV}	V _{IH} = 1.8 V, V _{IL} = 0 V (Note 12)	1.8	1.5	V
		V _{IH} = 2.5 V, V _{IL} = 0 V (Note 12)	2.5	1.9	
		V _{IH} = 3.3 V, V _{IL} = 0 V (Note 12)	3.3	2.2	

(Note 12): Parameter guaranteed by design.

Capacitive Characteristics ($T_a = 25^\circ\text{C}$)

PARAMETER	SYMBOL	TEST CONDITION	V _{CC} (V)	Typ.	UNIT
Input Capacitance	C _{IN}		1.8, 2.5, 3.3	6	pF
Power Dissipation Capacitance	C _{PD}	f _{IN} = 10 MHz (Note 13)	1.8, 2.5, 3.3	20	pF


(Note 13): C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation :

$$I_{CC(\text{opr.})} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}$$


TEST CIRCUIT

Fig.1

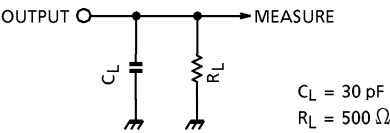

AC WAVEFORM




Fig.2 t_{pLH} , t_{pHL}

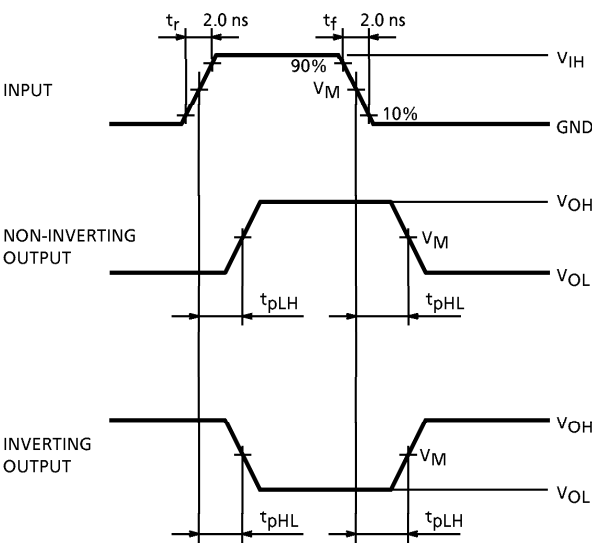

SYMBOL	V_{CC}		
	$3.3 \pm 0.3 \text{ V}$	$2.5 \pm 0.2 \text{ V}$	1.8 V
V_{IH}	2.7 V	V_{CC}	V_{CC}
V_M	1.5 V	$V_{CC}/2$	$V_{CC}/2$

PACKAGE DIMENSIONS
TSSOP16-P-0044-0.65

Unit : mm

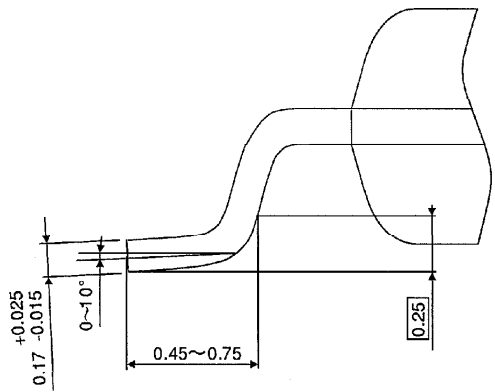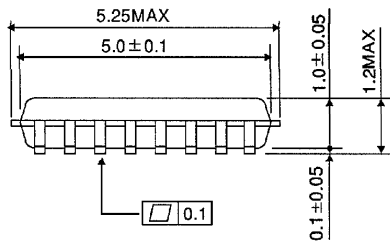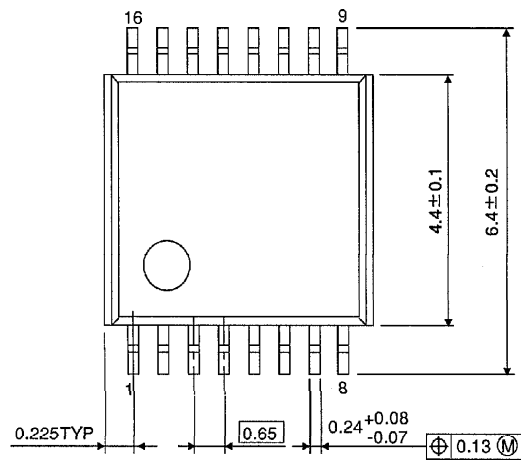

Weight : 0.06 g (typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.