

TOSHIBA SOLID STATE AC RELAY

**TSZ1G48, TSZ1J48**

OPTICALLY ISOLATED, NORMALLY OPEN SSR

Unit in mm

COMPUTER PERIPHERALS  
MACHINE TOOL CONTROLS  
PROCESS CONTROL SYSTEMS  
TRAFFIC CONTROL SYSTEMS


- R.M.S On-State Current :  $I_T(\text{RMS}) = 1\text{A}$
- Non-Repetitive Peak Off-State Voltage :  $V_{\text{DSM}} = 400, 600\text{V}$
- TTL Compatible
- Isolation Voltage :  $2000\text{V AC (}t = 1\text{min.)}$

MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )  
INPUT (CONTROL)

| CHARACTERISTIC                         | SYMBOL           | RATING | UNIT |
|----------------------------------------|------------------|--------|------|
| Control Input Voltage (DC)<br>(Note 1) | $V_F(\text{IN})$ | 5.5    | V    |
| Control Input Current (DC)             | $I_F(\text{IN})$ | 30     | mA   |

OUTPUT (LOAD)

|                                                           |         |                      |           |    |
|-----------------------------------------------------------|---------|----------------------|-----------|----|
| Non-Repetitive Peak<br>Off-State Voltage                  | TSZ1G48 | V <sub>DSM</sub>     | 400       | V  |
|                                                           | TSZ1J48 |                      | 600       |    |
| Nominal AC Line<br>Voltage                                | TSZ1G48 | V <sub>AC</sub>      | 120       | V  |
|                                                           | TSZ1J48 |                      | 240       |    |
| R.M.S On-State Current                                    |         | I <sub>T</sub> (RMS) | 1         | A  |
| Peak One Cycle Surge On-State<br>Current (Non-Repetitive) |         | I <sub>TSM</sub>     | 20 (50Hz) | A  |
|                                                           |         |                      | 22 (60Hz) |    |
| Operating Frequency Range                                 |         | f                    | 45~65     | Hz |
| Isolation Voltage<br>(t=1min., Input to Output)           |         | BV <sub>S</sub> /AC  | 2000      | V  |
| Operating Temperature Range                               |         | T <sub>opr</sub>     | −20~80    | °C |
| Storage Temperature Range                                 |         | T <sub>stg</sub>     | −30~80    | °C |

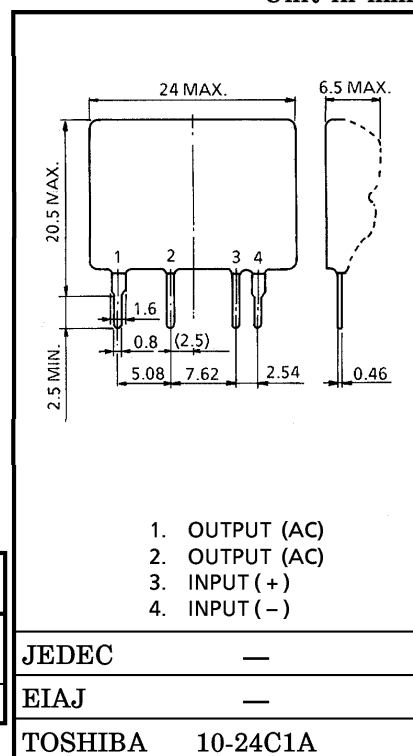

Weight : 5g

Note 1 : Driving input rating : Insert an external resistance into SSR when the power supply over 5.5V is used.

Note 2 : Snubber network (C-R) is necessary to protect from surge voltage and  $dv/dt$  fire. Snubber network is to be connected between #1 #2 terminal.

Note 3 : Mounting : Soldering of printed wiring board should be used under  $260^\circ\text{C}$  and 10 second.

ELECTRICAL CHARACTERISTICS (Ta = 25°C)  
INPUT (CONTROL)

| CHARACTERISTIC   | SYMBOL     | TEST CONDITION                          | MIN. | TYP. | MAX. | UNIT     |
|------------------|------------|-----------------------------------------|------|------|------|----------|
| Pick Up Voltage  | $V_{FT}$   | $V_{AC} = 100V_{rms}$<br>Resistive Load | —    | —    | 4.0  | V        |
| Drop Out Voltage | $V_{FD}$   |                                         | 0.5  | —    | —    | V        |
| Input Resistance | $R_{(IN)}$ |                                         | —    | 160  | —    | $\Omega$ |

OUTPUT (LOAD)

|                           |           |                                                 |                                 |           |   |       |             |
|---------------------------|-----------|-------------------------------------------------|---------------------------------|-----------|---|-------|-------------|
| Off-State Leakage Current | TSZ1G48   | $I_{OL}$                                        | $V_{AC} = 100V_{rms}, f = 50Hz$ | —         | — | 0.1   | mA          |
|                           | TSZ1J48   |                                                 | $V_{AC} = 200V_{rms}, f = 50Hz$ | —         | — | 0.2   |             |
| Peak On-State Voltage     | $V_{TM}$  | $I_T (RMS) = 1A$                                |                                 | —         | — | 1.5   | V           |
| dv / dt (Off-State)       | dv / dt   | $V_{DSM} = 0.7 \times \text{Rated}$             |                                 | 10        | — | —     | V / $\mu s$ |
| Minimum Load Current      | —         |                                                 |                                 | 100       | — | —     | mA          |
| Turn-On Time              | $t_{on}$  | $V_{AC} = 100V_{rms}$<br>Resistive Load (Fig.1) |                                 | —         | — | 1     | ms          |
| Turn-Off Time             | $t_{off}$ |                                                 |                                 | —         | — | 1 / 2 | Cycle       |
| Isolation Resistance      | $R_S$     | $V = 500V, R.H = 40 \sim 60\%$                  |                                 | $10^{10}$ | — | —     | $\Omega$    |

EQUIVALEN CIRCUIT





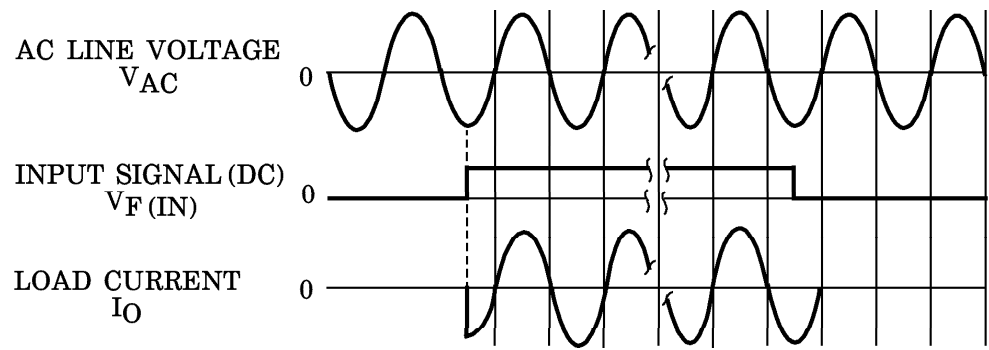


Fig.1 SWITCHING WAVEFORM

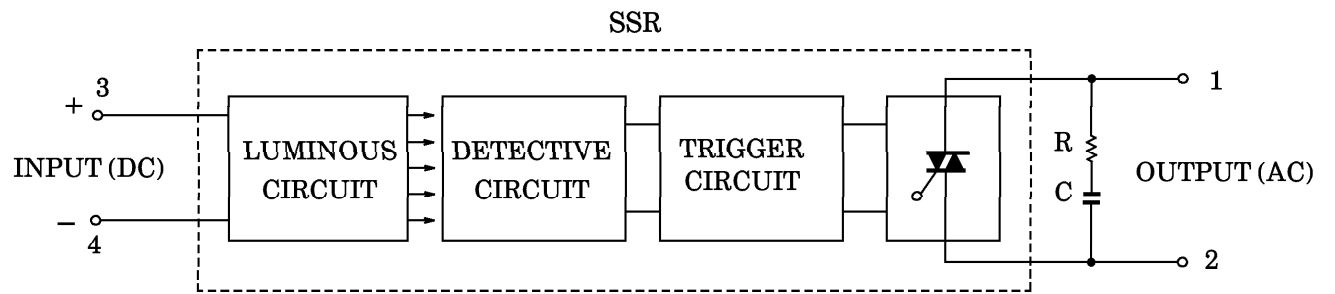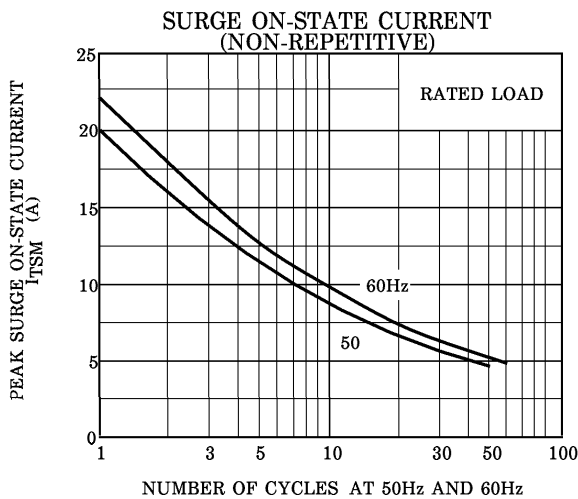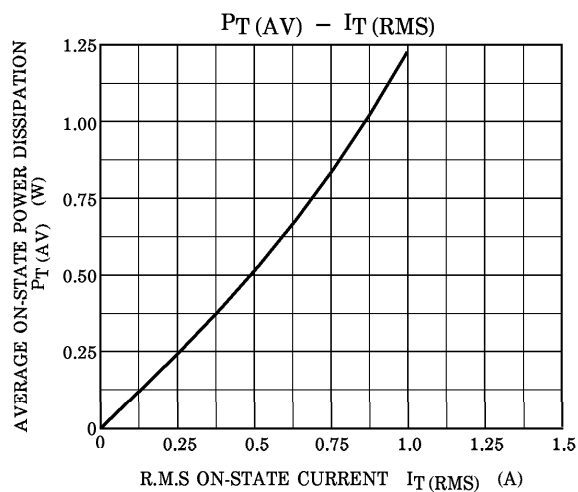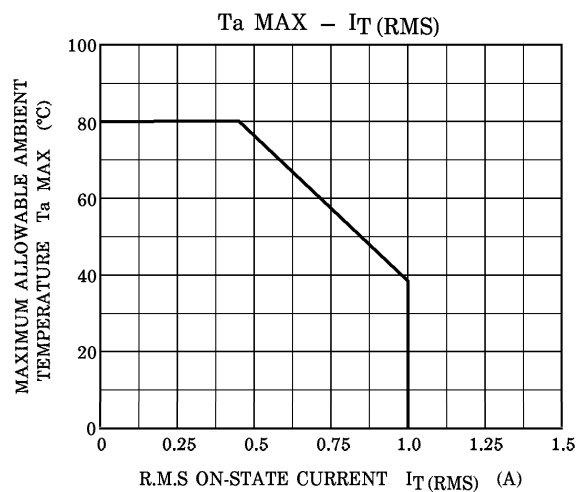

**RESTRICTIONS ON PRODUCT USE**

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.