


TLV431, TLV431A


LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139F – JULY 1996 – REVISED JUNE 2003


- Low-Voltage Operation . . . Down to 1.24 V
- 1% Reference-Voltage Tolerance (TLV431A)
- Adjustable Output Voltage, $V_O = V_{ref}$ to 6 V
- Low Operational Cathode Current . . . 80 μ A Typ
- 0.25- Ω Typical Output Impedance

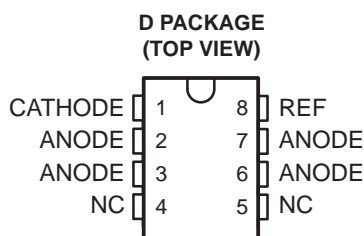

NC – No internal connection

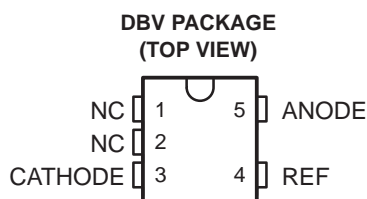

NC – No internal connection



description/ordering information

The TLV431 and TLV431A are low-voltage three-terminal adjustable voltage references, with specified thermal stability over applicable industrial and commercial temperature ranges. Output voltage can be set to any value between V_{ref} (1.24 V) and 6 V with two external resistors (see Figure 2). The TLV431 and TLV431A operate from a lower voltage (1.24 V) than the widely used TL431 and TL1431 shunt-regulator references.

When used with an optocoupler, the TLV431 and TLV431A are ideal voltage references in isolated feedback circuits for 3-V to 3.3-V switching-mode power supplies. These devices have a typical output impedance of 0.25 Ω . Active output circuitry provides a very sharp turn-on characteristic, making the TLV431 and TLV431A excellent replacements for low-voltage Zener diodes in many applications, including onboard regulation and adjustable power supplies.

The TLV431C and TLV431AC devices are characterized for operation from 0°C to 70°C. The TLV431I and TLV431AI devices are characterized for operation from –40°C to 85°C.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2003, Texas Instruments Incorporated

TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139F – JULY 1996 – REVISED JUNE 2003

ORDERING INFORMATION


T _A	PACKAGE†		ORDERABLE PART NUMBER	TOP-SIDE MARKING
0°C to 70°C	SOT-23 (DBV)	Reel of 3000	TLV431CDBVR	VAIC
		Reel of 250	TLV431CDBVT	
		Reel of 3000	TLV431ACDBVR	VAHC
		Reel of 250	TLV431ACDBVT	
	TO-92 (LP)	Bulk of 1000	TLV431CLP	V431C
		Reel of 2000	TLV431CLPR	
		Bulk of 1000	TLV431ACLP	V431AC
		Reel of 2000	TLV431ACLPR	
–40°C to 85°C	SOIC (D)	Tube of 75	TLV431AID	TY431A
		Reel of 2500	TLV431AIDR	
	SOT-23 (DBV)	Reel of 3000	TLV431IDBVR	VAII
		Reel of 250	TLV431IDBVT	
		Reel of 3000	TLV431AIDBVR	VAHI
		Reel of 250	TLV431AIDBVT	
	TO-92 (LP)	Bulk of 1000	TLV431ILP	V431I
		Reel of 2000	TLV431ILPR	
		Bulk of 1000	TLV431AILP	V431AI
		Reel of 2000	TLV431AILPR	

† Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

logic symbol



logic diagram (positive logic)

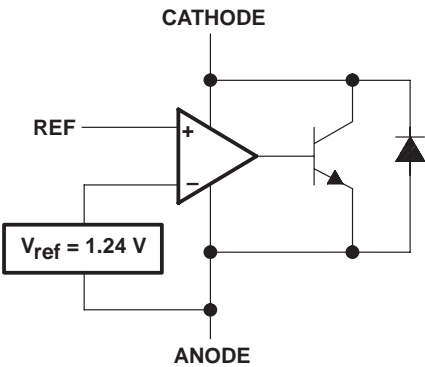


TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139F – JULY 1996 – REVISED JUNE 2003

equivalent schematic

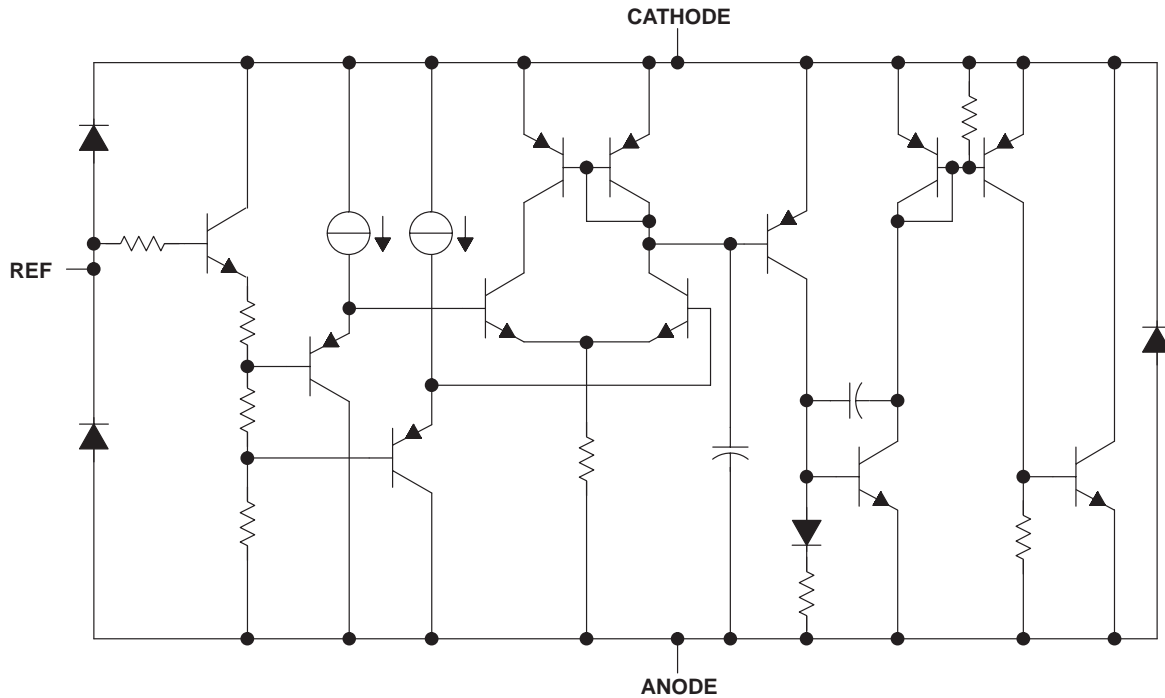

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Cathode voltage, V_{KA} (see Note 1)	7 V
Continuous cathode current range, I_K	–20 mA to 20 mA
Reference current range, I_{ref}	–0.05 mA to 3 mA
Operating virtual junction temperature, T_J	150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C
Storage temperature range, T_{stg}	–65°C to 150°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: Voltage values are with respect to the anode terminal unless otherwise noted.

package thermal data (see Note 2)

PACKAGE	BOARD	θ_{JC}	θ_{JA}
SOIC (D)	High K, JESD 51-7	39°C/W	97°C/W
SOT-23 (DBV)	High K, JESD 51-7	131°C/W	206°C/W
TO-92 (LP)	High K, JESD 51-7	55°C/W	140°C/W

NOTE 2: Maximum power dissipation is a function of $T_J(\max)$, θ_{JA} , and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(\max) - T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of 150°C can affect reliability.

TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139F – JULY 1996 – REVISED JUNE 2003

recommended operating conditions

			MIN	MAX	UNIT
V _{KA}	Cathode voltage		V _{ref}	6	V
I _K	Cathode current		0.1	15	mA
T _A	Operating free-air temperature range	TLV431C, TLV431AC	0	70	°C
		TLV431I, TLV431AI	−40	85	

electrical characteristics, $T_A = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		TLV431C			TLV431I			UNIT	
				MIN	TYP	MAX	MIN	TYP	MAX		
V _{ref}	Reference voltage	V _{KA} = V _{ref} , I _K = 10 mA	T _A = 25°C	1.222	1.24	1.258	1.222	1.24	1.258	V	
			T _A = full range (see Note 3 and Figure 1)	1.21		1.27		1.202			1.278
V _{ref(dev)}	V _{ref} deviation over full temperature range (see Note 4)	V _{KA} = V _{ref} , I _K = 10 mA (see Note 3 and Figure 1)		4			12		6	20	mV
$\frac{\Delta V_{ref}}{\Delta V_{KA}}$	Ratio of V _{ref} change in cathode voltage change	I _K = 10 mA, V _{KA} = V _{ref} to 6 V (see Figure 2)		–1.5			–2.7		–1.5	–2.7	mV/V
I _{ref}	Reference terminal current	I _K = 10 mA, R1 = 10 kΩ, R2 = open (see Figure 2)		0.15			0.5		0.15	0.5	μA
I _{ref(dev)}	I _{ref} deviation over full temperature range (see Note 4)	I _K = 10 mA, R1 = 10 kΩ, R2 = open (see Note 3 and Figure 2)		0.05			0.3		0.1	0.4	μA
I _{K(min)}	Minimum cathode current for regulation	V _{KA} = V _{ref} (see Figure 1)		55			80		55	80	μA
I _{K(off)}	Off-state cathode current	V _{KA} = 6 V, V _{ref} = 0 (see Figure 3)		0.001			0.1		0.001	0.1	μA
z _{KA}	Dynamic impedance (see Note 5)	V _{KA} = V _{ref} , f ≤ 1 kHz, I _K = 0.1 mA to 15 mA (see Figure 1)		0.25			0.4		0.25	0.4	Ω

- NOTES: 3. Full range is -40°C to 85°C for the TLV431I, and 0°C to 70°C for the TLV431C.
4. The deviation parameters $V_{ref}(\text{dev})$ and $I_{ref}(\text{dev})$ are defined as the differences between the maximum and minimum values obtained over the rated temperature range. The average full-range temperature coefficient of the reference input voltage, $\alpha_{V_{ref}}$, is defined as:

$$|\alpha_{V_{ref}}| \left(\frac{\text{ppm}}{^\circ\text{C}} \right) = \frac{\left(\frac{V_{ref}(\text{dev})}{V_{ref} \text{ at } 25^\circ\text{C}} \right) \times 10^6}{\Delta T_A}$$

where:

ΔT_A is the rated operating temperature range of the device.

$\alpha_{V_{ref}}$ can be positive or negative, depending on whether minimum V_{ref} or maximum V_{ref} , respectively, occurs at the lower temperature.

5. The dynamic impedance is defined as: $|z_{KA}| = \frac{\Delta V_{KA}}{\Delta I_{KA}}$

When the device is operating with two external resistors (see Figure 2), the total dynamic impedance of the circuit is given by:

$$|z_{KA}| = \frac{\Delta V}{\Delta I} \approx |z_{KA}| \times \left(1 + \frac{R_1}{R_2} \right)$$



TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139F – JULY 1996 – REVISED JUNE 2003

electrical characteristics, $T_A = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	TLV431AC			TLV431AI			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	
V_{ref} Reference voltage	$V_{\text{KA}} = V_{\text{ref}}, I_{\text{K}} = 10\text{ mA}$ $T_A = 25^\circ\text{C}$ $T_A = \text{full range}$ (see Note 3 and Figure 1)	1.228	1.24	1.252	1.228	1.24	1.252	V
		1.221		1.259	1.215		1.265	
$V_{\text{ref(dev)}}$ V_{ref} deviation over full temperature range (see Note 4)	$V_{\text{KA}} = V_{\text{ref}}, I_{\text{K}} = 10\text{ mA}$ (see Note 3 and Figure 1)		4	12		6	20	mV
$\frac{\Delta V_{\text{ref}}}{\Delta V_{\text{KA}}}$ Ratio of V_{ref} change in cathode voltage change	$I_{\text{K}} = 10\text{ mA}, V_{\text{KA}} = V_{\text{ref}}$ to 6 V (see Figure 2)		-1.5	-2.7		-1.5	-2.7	mV/V
I_{ref} Reference terminal current	$I_{\text{K}} = 10\text{ mA}, R_1 = 10\text{ k}\Omega$ (see Figure 2)		0.15	0.5		0.15	0.5	μA
$I_{\text{ref(dev)}}$ I_{ref} deviation over full temperature range (see Note 4)	$I_{\text{K}} = 10\text{ mA}, R_1 = 10\text{ k}\Omega, R_2 = \text{open}$ (see Note 3 and Figure 2)		0.05	0.3		0.1	0.4	μA
$I_{\text{K(min)}}$ Minimum cathode current for regulation	$V_{\text{KA}} = V_{\text{ref}}$ (see Figure 1)		55	80		55	80	μA
$I_{\text{K(off)}}$ Off-state cathode current	$V_{\text{KA}} = 6\text{ V}, V_{\text{ref}} = 0$ (see Figure 3)		0.001	0.1		0.001	0.1	μA
$ z_{\text{KA}} $ Dynamic impedance (see Note 5)	$V_{\text{KA}} = V_{\text{ref}}, f \leq 1\text{ kHz}, I_{\text{K}} = 0.1\text{ mA}$ to 15 mA (see Figure 1)		0.25	0.4		0.25	0.4	Ω

NOTES: 3. Full range is -40°C to 85°C for the TLV431AI, and 0°C to 70°C for the TLV431AC.

4. The deviation parameters $V_{\text{ref(dev)}}$ and $I_{\text{ref(dev)}}$ are defined as the differences between the maximum and minimum values obtained over the rated temperature range. The average full-range temperature coefficient of the reference input voltage, $\alpha_{V_{\text{ref}}}$, is defined as:

$$|\alpha_{V_{\text{ref}}}|\left(\frac{\text{ppm}}{^\circ\text{C}}\right) = \frac{\left(\frac{V_{\text{ref(dev)}}}{V_{\text{ref at } 25^\circ\text{C}}}\right) \times 10^6}{\Delta T_A}$$

where:

ΔT_A is the rated operating temperature range of the device.

$\alpha_{V_{\text{ref}}}$ can be positive or negative, depending on whether minimum V_{ref} or maximum V_{ref} , respectively, occurs at the lower temperature.

5. The dynamic impedance is defined as: $|z_{\text{KA}}| = \frac{\Delta V_{\text{KA}}}{\Delta I_{\text{KA}}}$

When the device is operating with two external resistors (see Figure 2), the total dynamic impedance of the circuit is given by:

$$|z_{\text{KA}}| = \frac{\Delta V}{\Delta I} \approx |z_{\text{KA}}| \times \left(1 + \frac{R_1}{R_2}\right)$$



TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139F – JULY 1996 – REVISED JUNE 2003

PARAMETER MEASUREMENT INFORMATION




Figure 1. Test Circuit for $V_{KA} = V_{ref}$,
 $V_O = V_{KA} = V_{ref}$

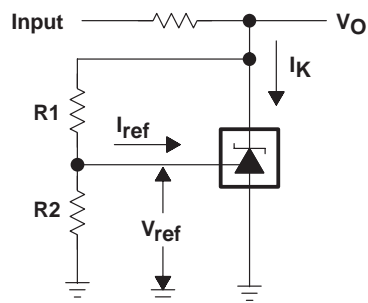


Figure 2. Test Circuit for $V_{KA} > V_{ref}$,
 $V_O = V_{KA} = V_{ref} \times (1 + R1/R2) + I_{ref} \times R1$








Figure 3. Test Circuit for $I_{K(off)}$

PARAMETER MEASUREMENT INFORMATION†

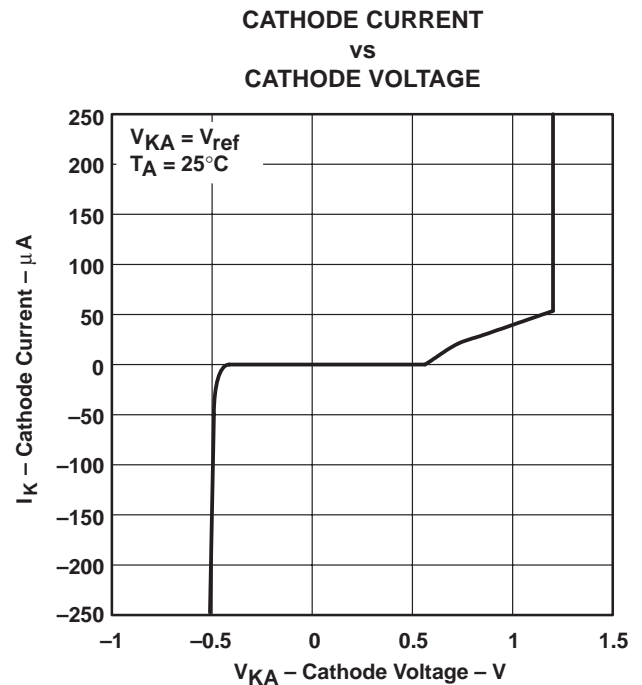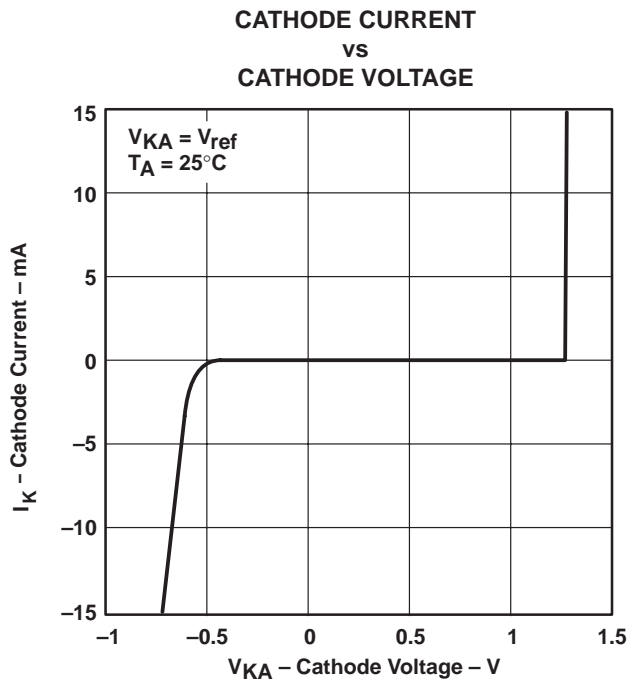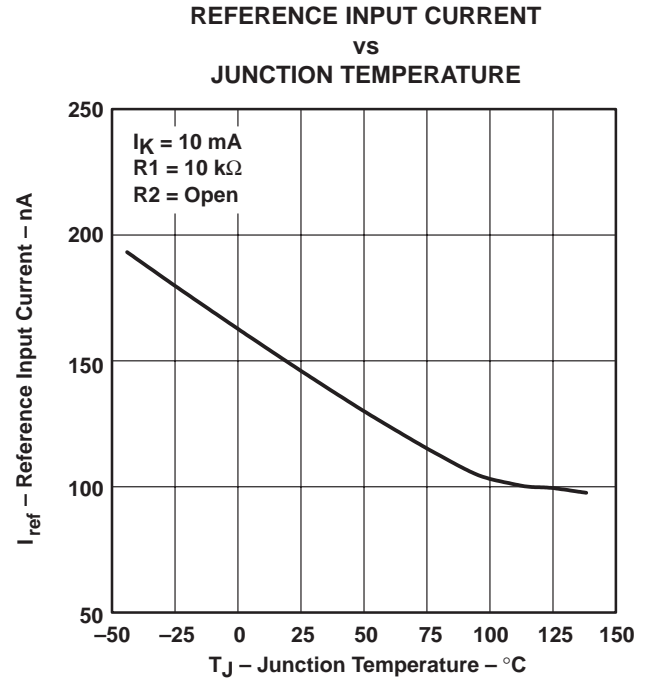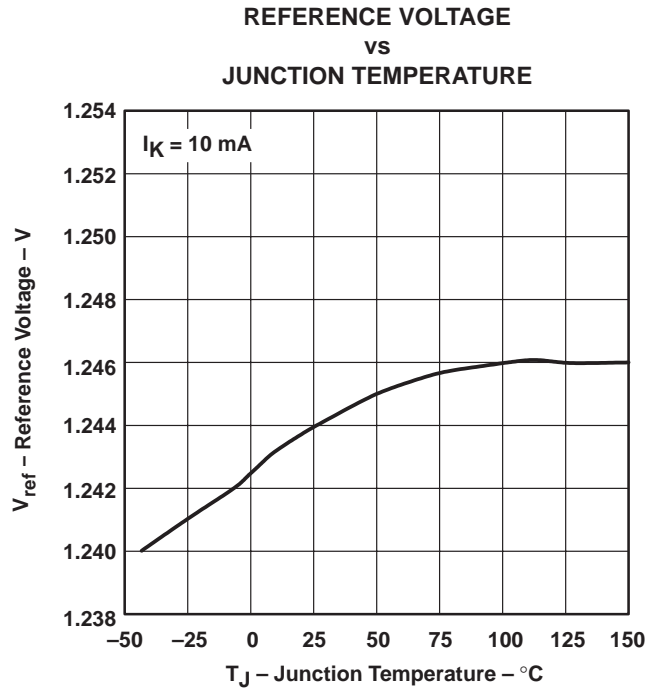

† Operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied.

TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139F – JULY 1996 – REVISED JUNE 2003

PARAMETER MEASUREMENT INFORMATION†

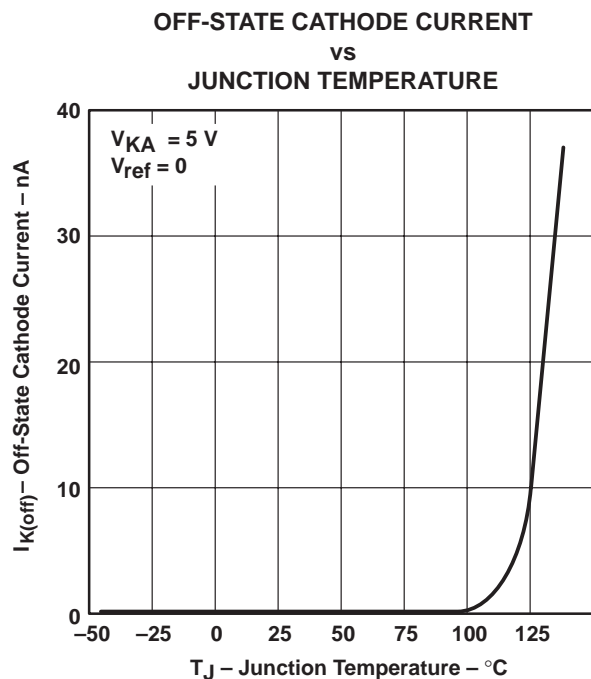


Figure 8

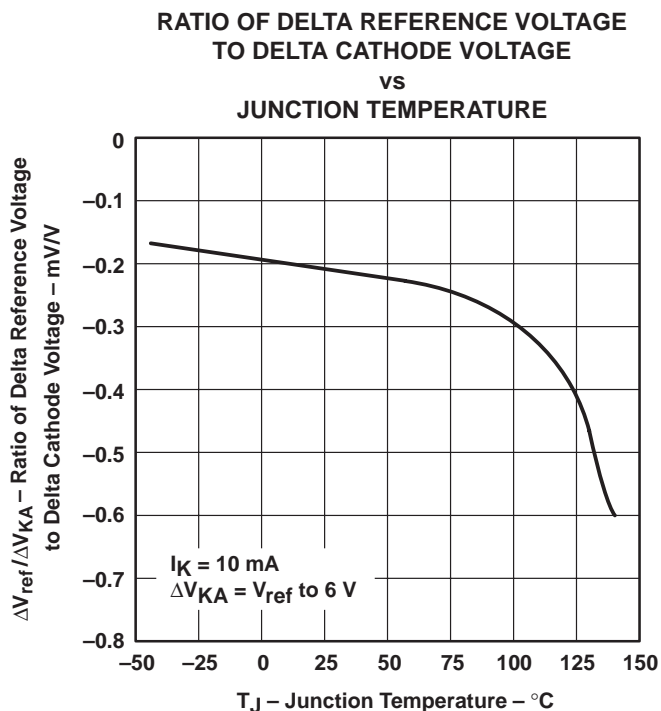


Figure 9

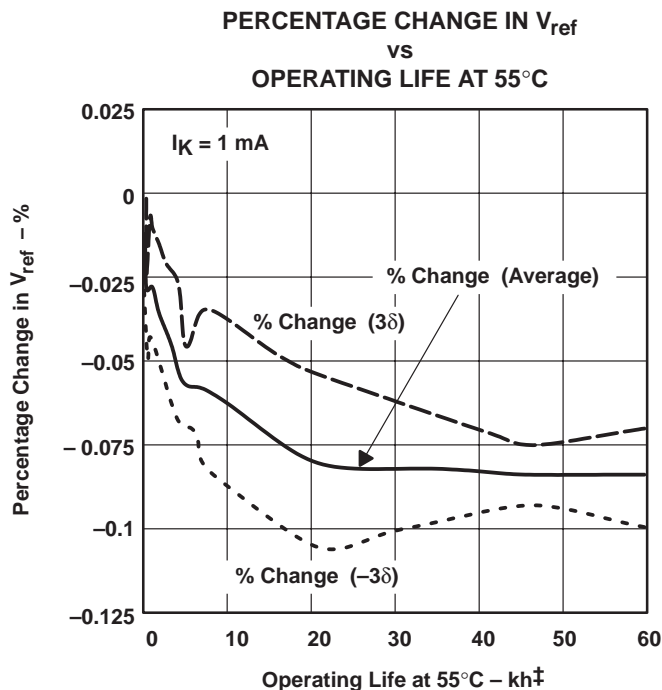


Figure 10

† Extrapolated from life-test data taken at 125°C; the activation energy assumed is 0.7 eV.

† Operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

PARAMETER MEASUREMENT INFORMATION

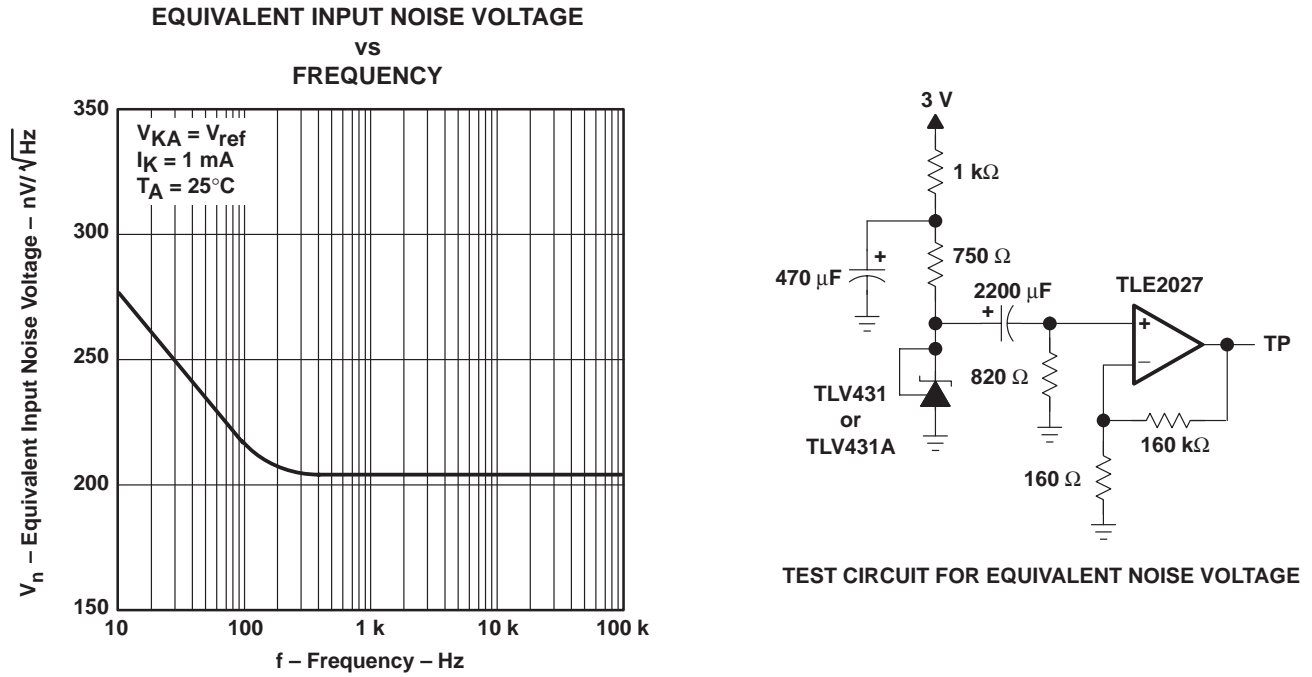


Figure 11



TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139F – JULY 1996 – REVISED JUNE 2003

PARAMETER MEASUREMENT INFORMATION



EQUIVALENT INPUT NOISE VOLTAGE
OVER A 10-SECOND PERIOD

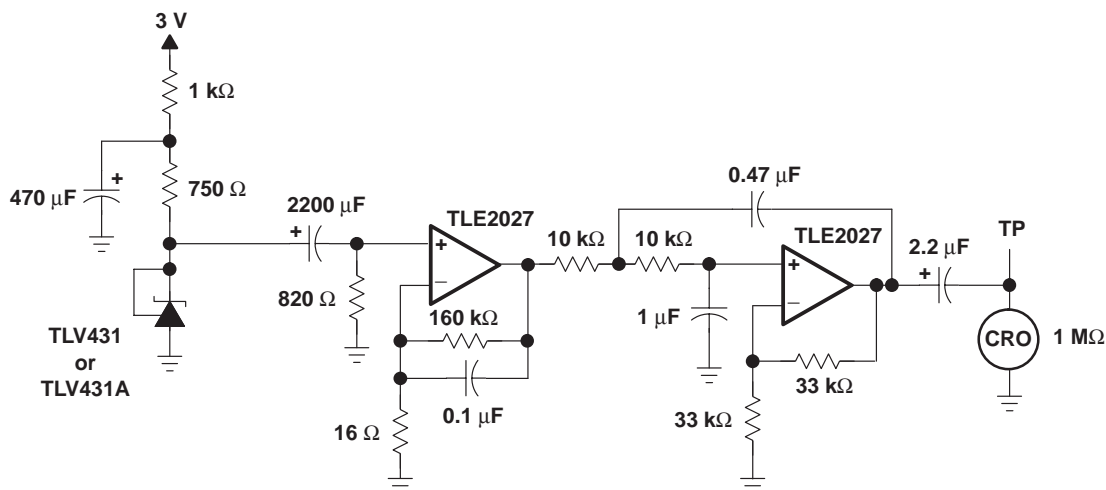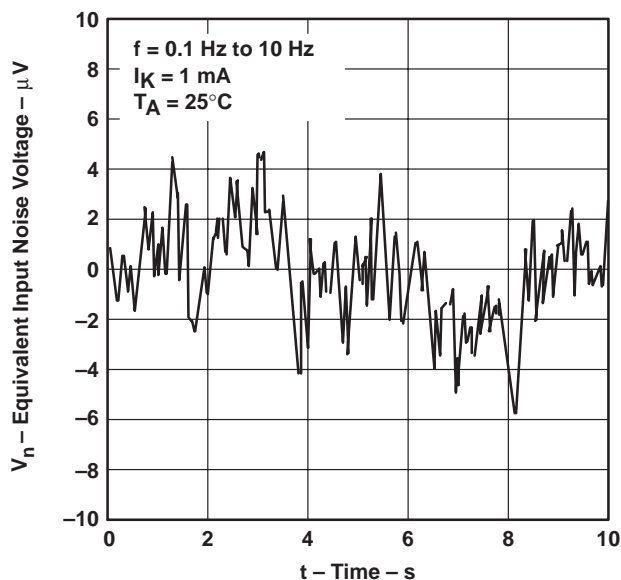

TEST CIRCUIT FOR 0.1-Hz TO 10-Hz EQUIVALENT NOISE VOLTAGE



Figure 12

PARAMETER MEASUREMENT INFORMATION

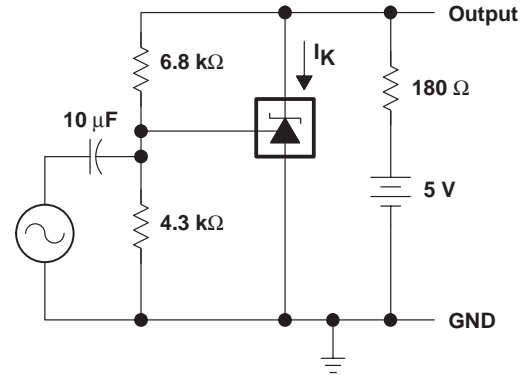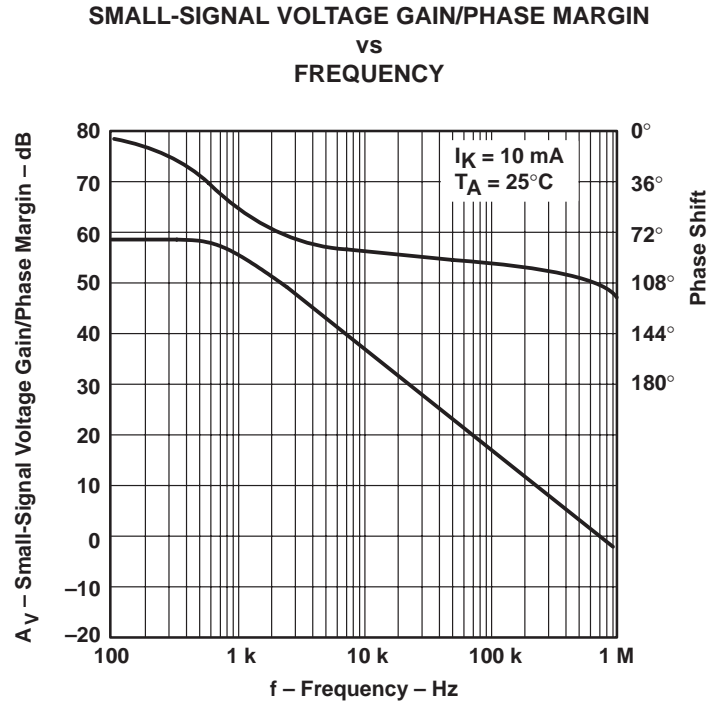

TEST CIRCUIT FOR VOLTAGE GAIN AND PHASE MARGIN

Figure 13

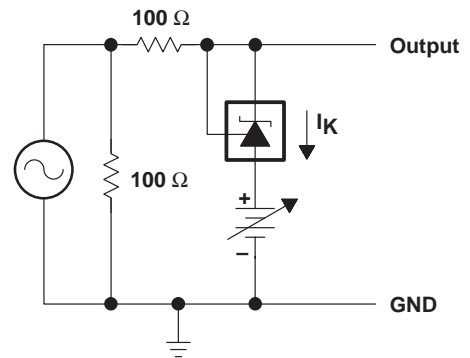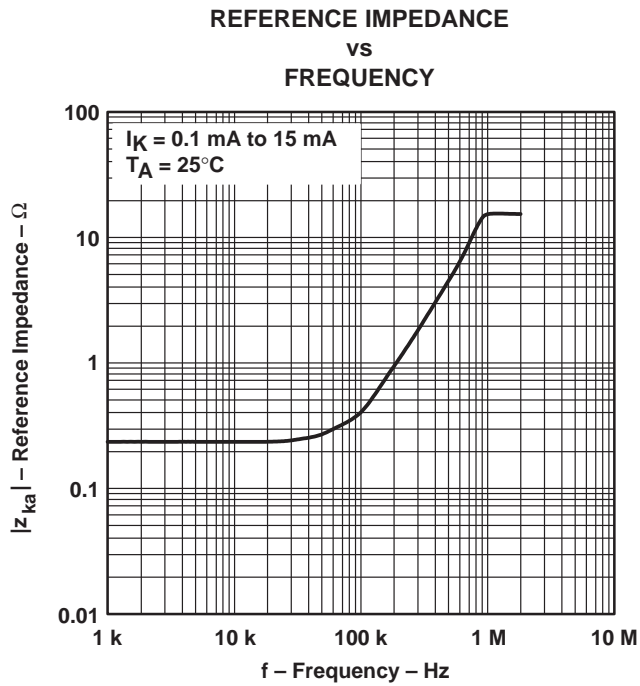

TEST CIRCUIT FOR REFERENCE IMPEDANCE

Figure 14

TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139F – JULY 1996 – REVISED JUNE 2003

PARAMETER MEASUREMENT INFORMATION

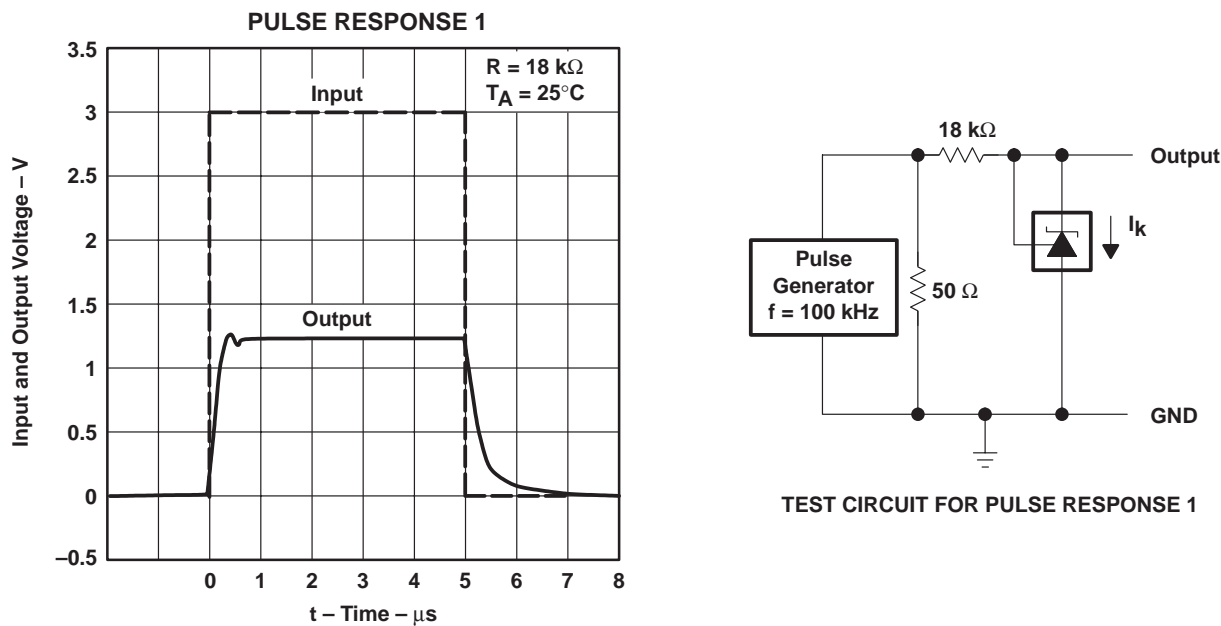


Figure 15



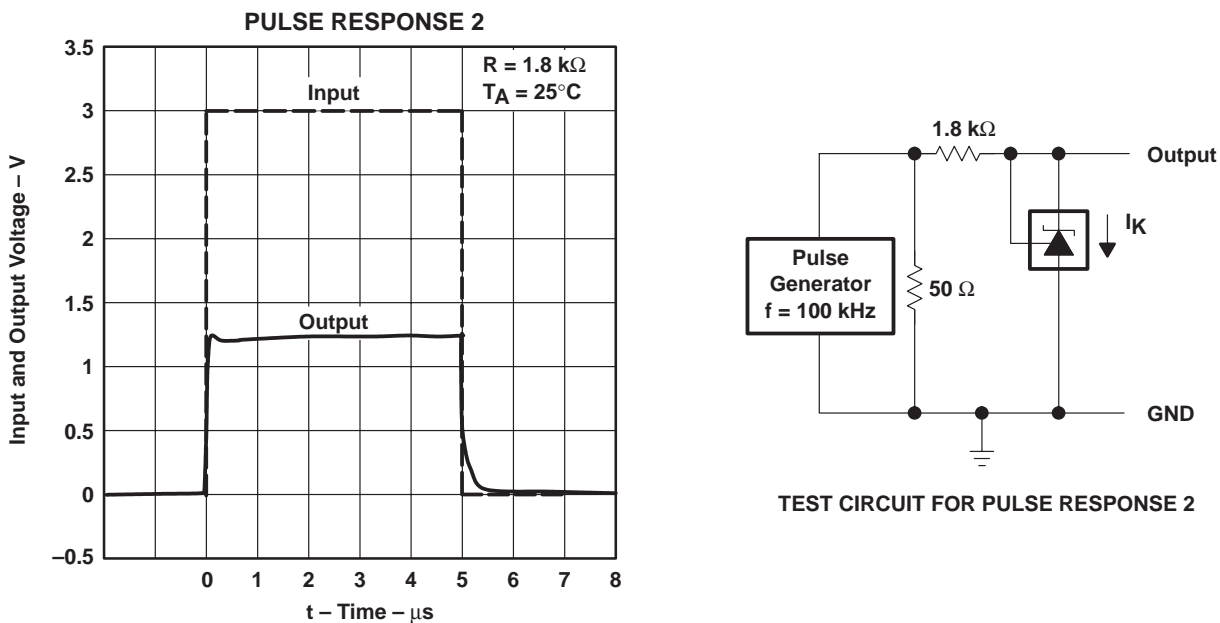



Figure 16

PARAMETER MEASUREMENT INFORMATION†

STABILITY BOUNDARY CONDITION‡

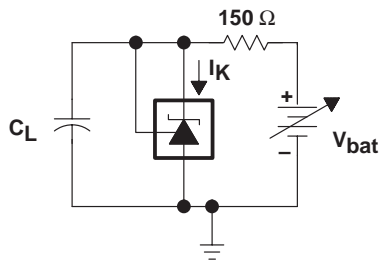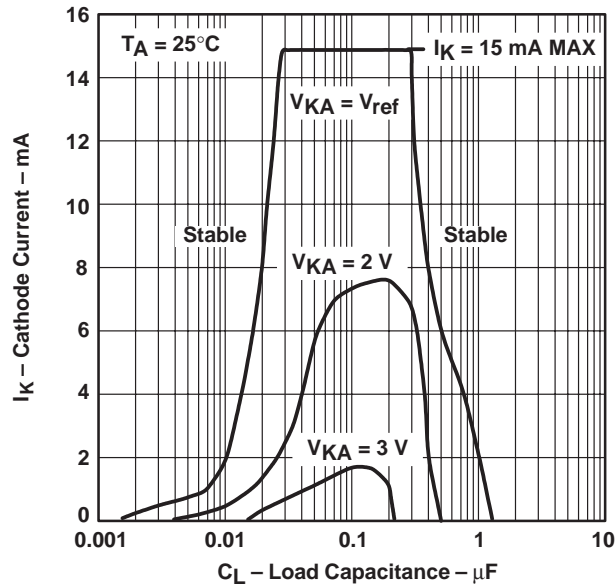

TEST CIRCUIT FOR $V_{KA} = V_{ref}$

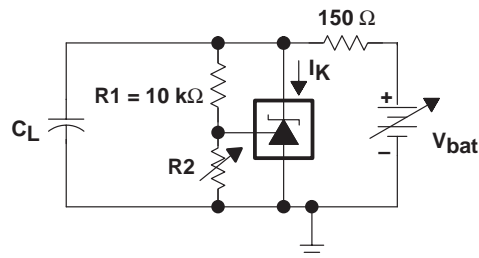

TEST CIRCUIT FOR $V_{KA} = 2\text{ V}, 3\text{ V}$

‡ The areas under the curves represent conditions that may cause the device to oscillate. For $V_{KA} = 2\text{-V}$ and 3-V curves, $R2$ and V_{bat} were adjusted to establish the initial V_{KA} and I_K conditions with $C_L = 0$. V_{bat} and C_L then were adjusted to determine the ranges of stability. For best results, use low-ESR tantalum or aluminum electrolytic capacitors.

Figure 17

† Operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied.

TLV431, TLV431A

SLVS139F – JULY 1996 – REVISED JUNE 2003

APPLICATION INFORMATION

Figure 18 shows the TLV431 or TLV431A used in a 3.3-V isolated flyback supply. Output voltage V_O can be as low as reference voltage V_{ref} ($1.24\text{ V} \pm 1\%$). The output of the regulator plus the forward voltage drop of the optocoupler LED ($1.24 + 1.4 = 2.64\text{ V}$) determine the minimum voltage that can be regulated in an isolated supply configuration. Regulated voltage as low as 2.7 Vdc is possible using the circuit in Figure 18.


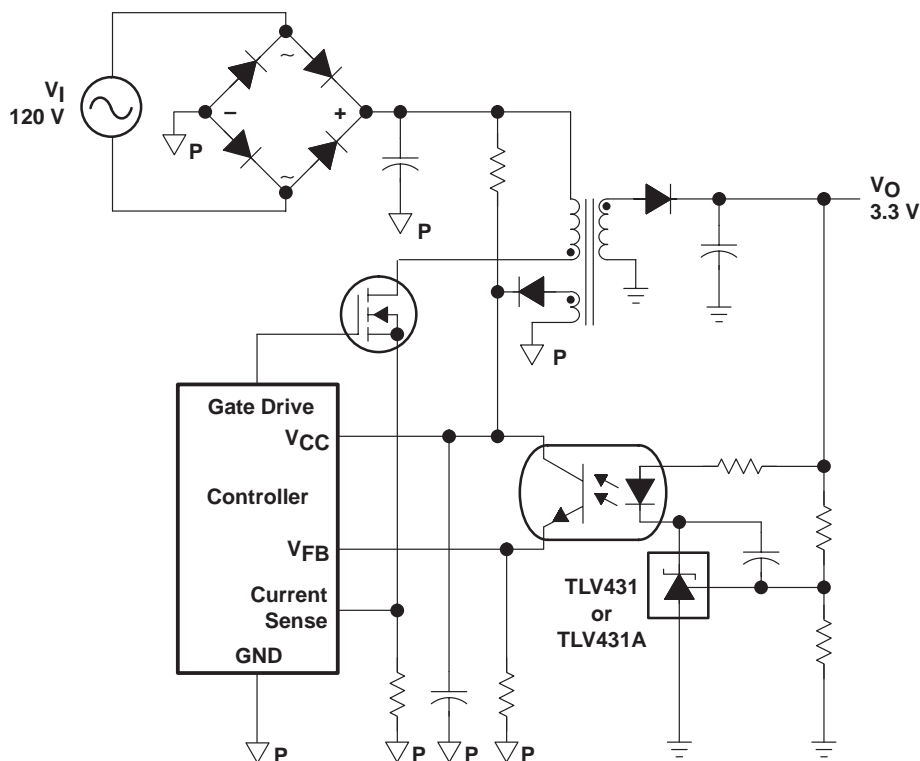


Figure 18. Flyback With Isolation Using TLV431 or TLV431A as Voltage Reference and Error Amplifier

DBV (R-PDSO-G5)

PLASTIC SMALL-OUTLINE

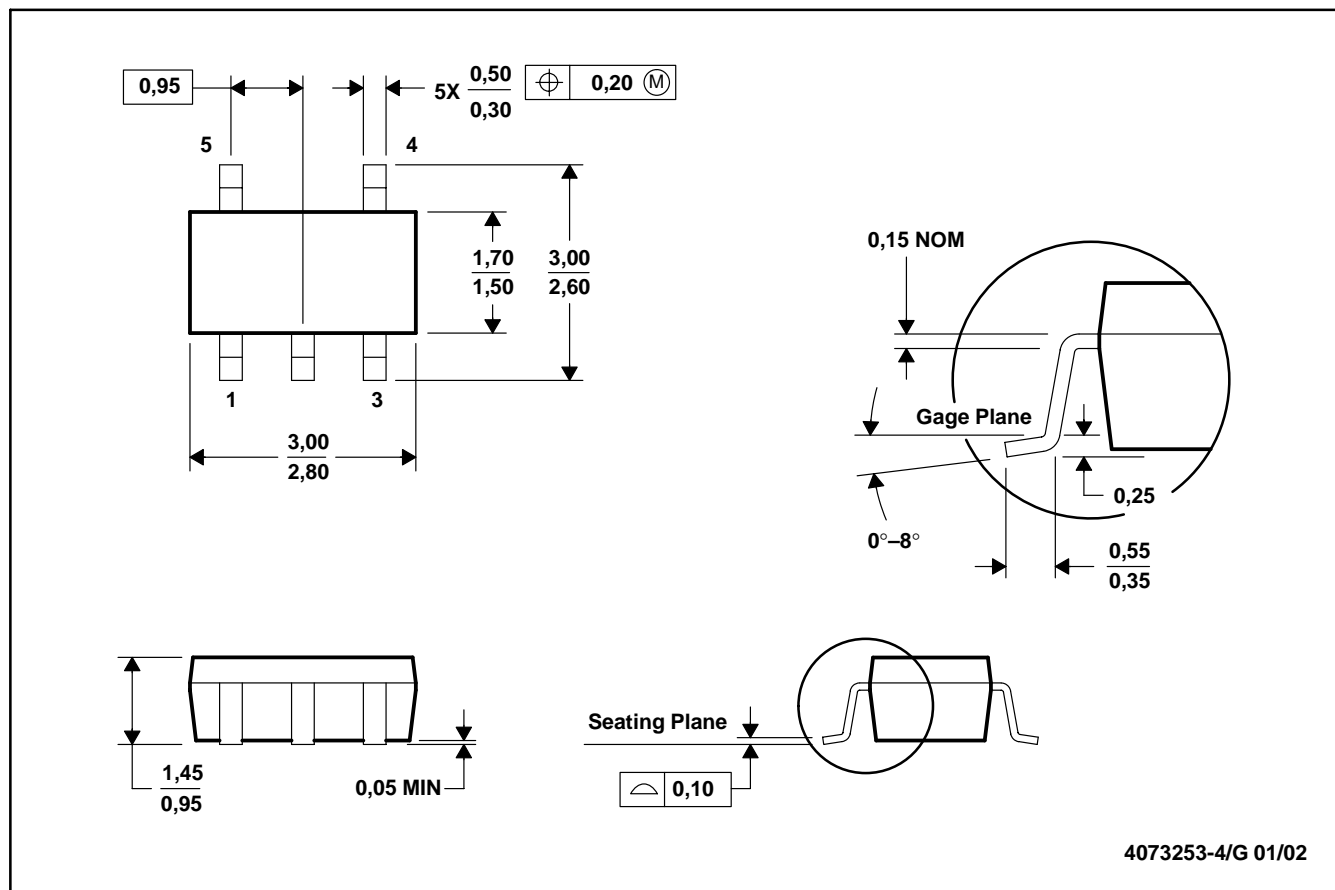


- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Body dimensions do not include mold flash or protrusion.
 - D. Falls within JEDEC MO-178

D (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE


8 PINS SHOWN

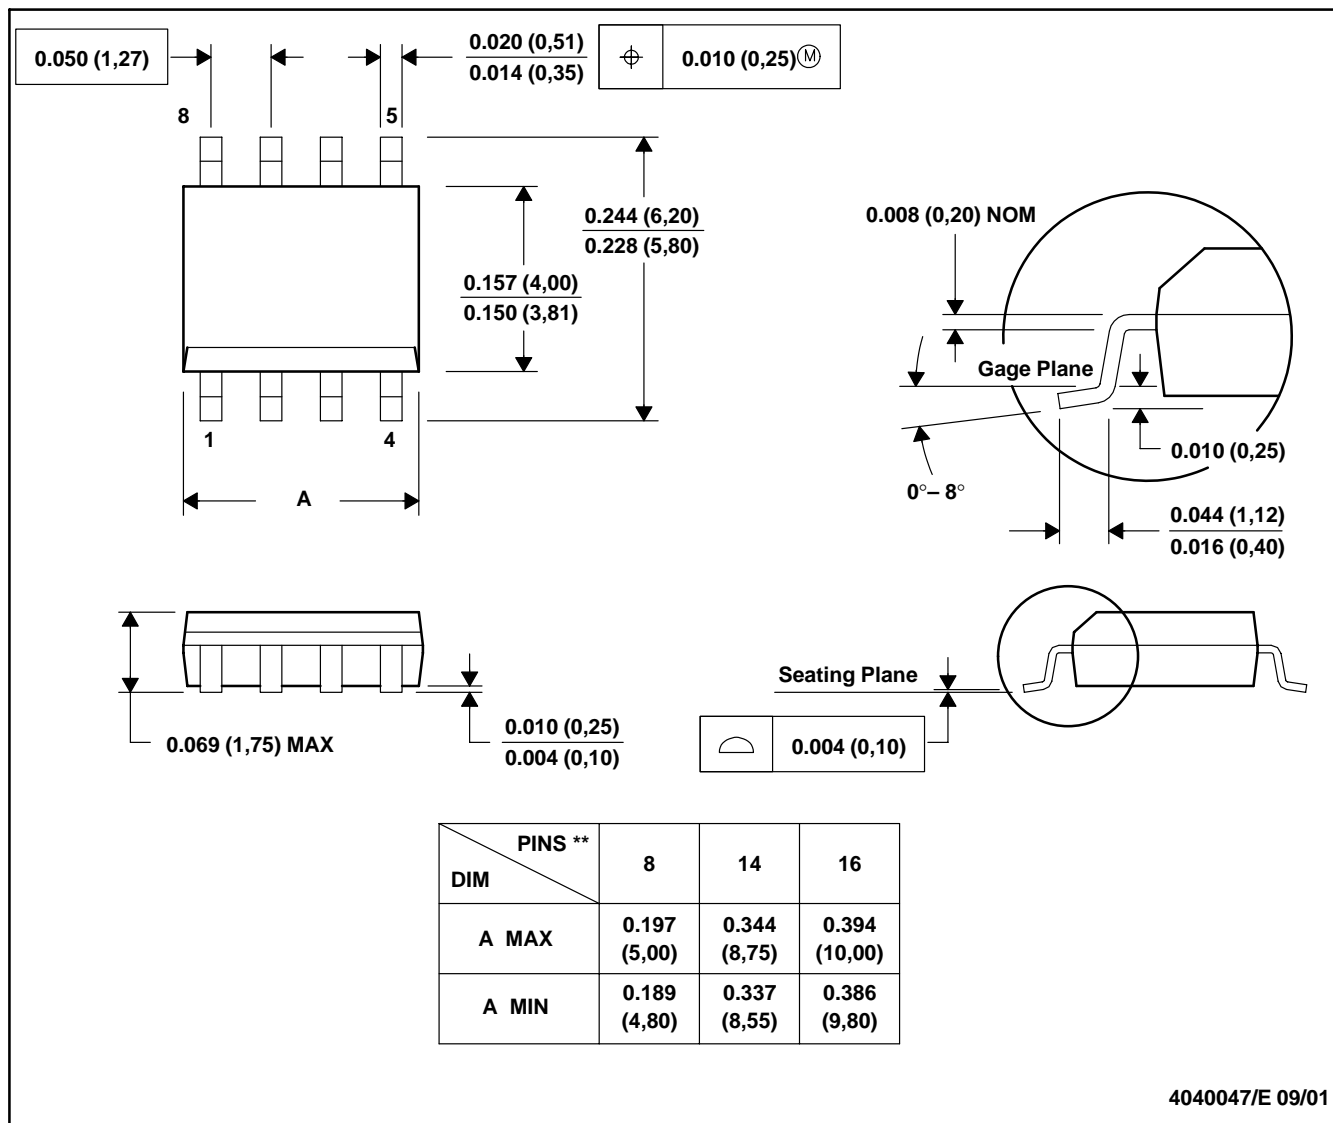

- NOTES: A. All linear dimensions are in inches (millimeters).
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion, not to exceed 0.006 (0,15).
 D. Falls within JEDEC MS-012

LP (O-PBCY-W3)

PLASTIC CYLINDRICAL PACKAGE

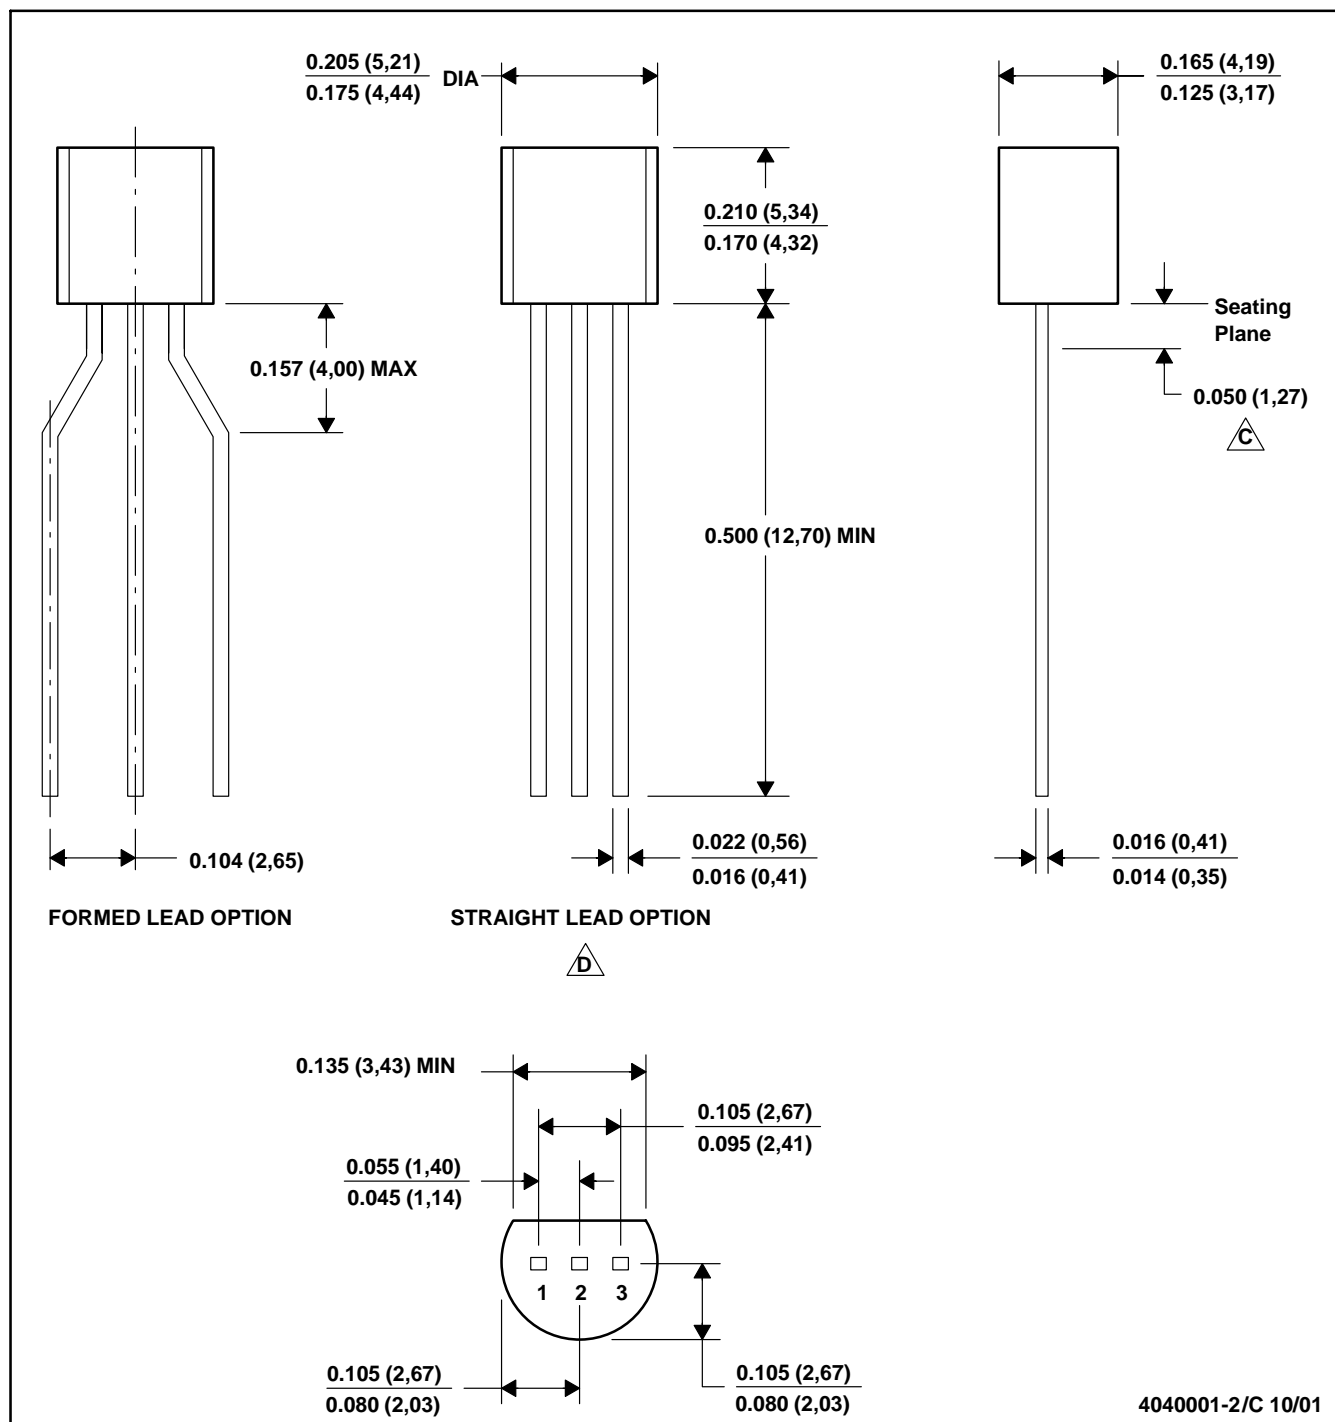


- NOTES: A. All linear dimensions are in inches (millimeters).
 B. This drawing is subject to change without notice.
 $\triangle C$ Lead dimensions are not controlled within this area
 $\triangle D$ Falls within JEDEC TO -226 Variation AA (TO-226 replaces TO-92)
 E. Shipping Method:
 Straight lead option available in bulk pack only.
 Formed lead option available in tape & reel or ammo pack.

MECHANICAL DATA

MSOT002A – OCTOBER 1994 – REVISED NOVEMBER 2001

LP (O-PBCY-W3)

PLASTIC CYLINDRICAL PACKAGE

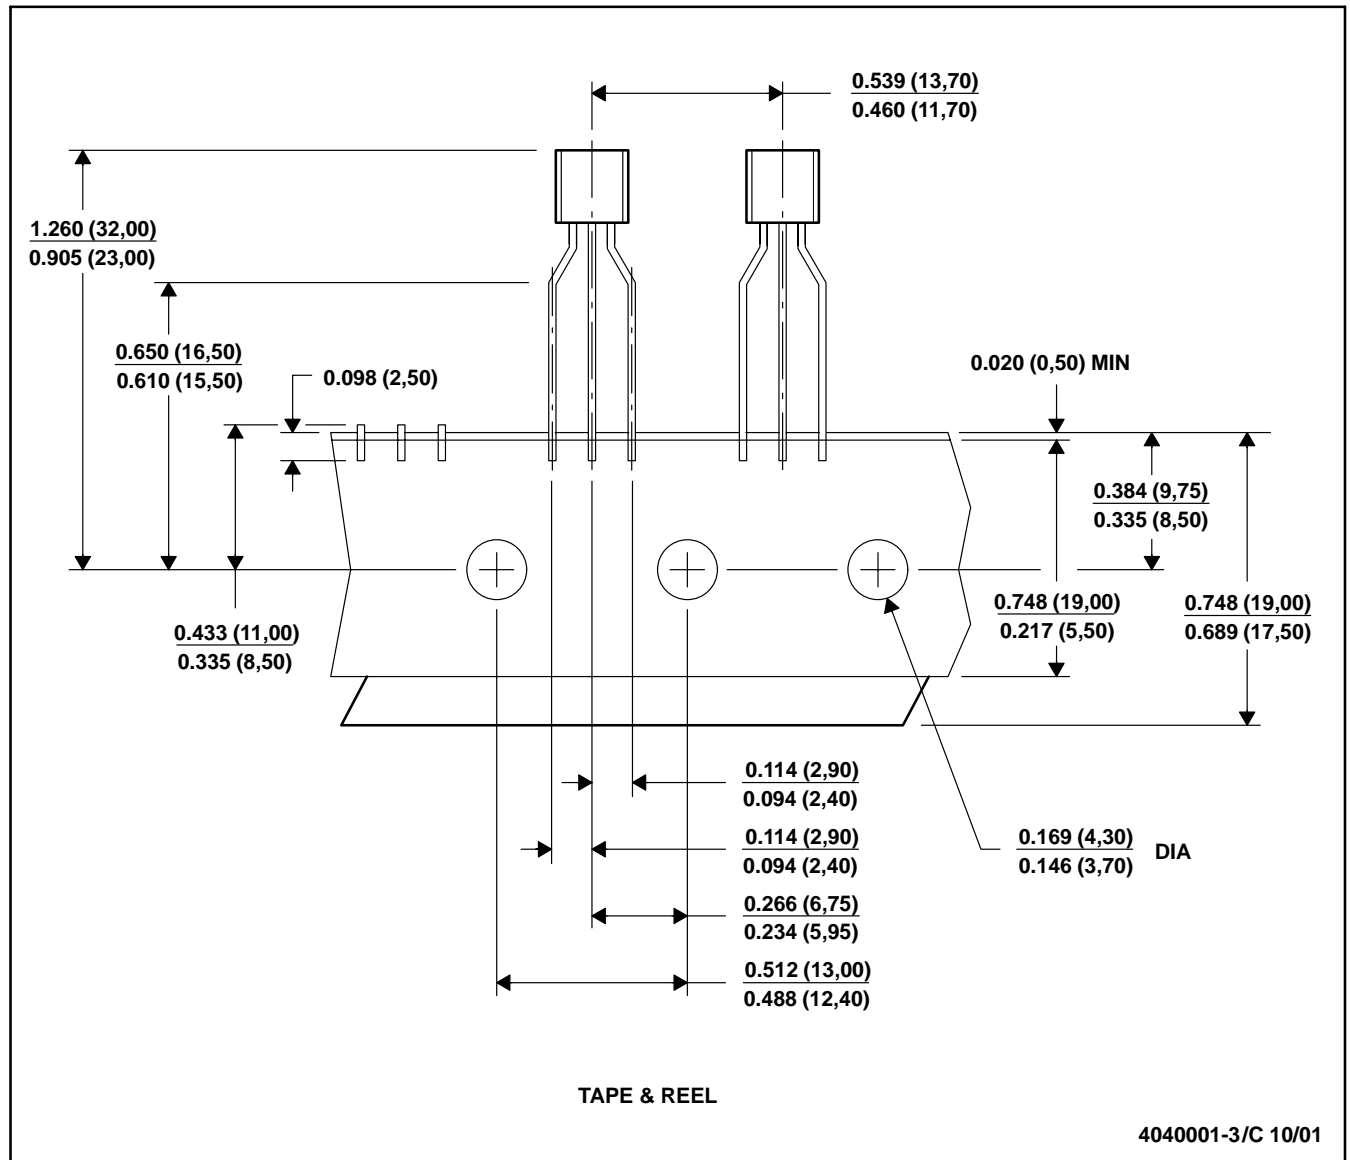

- NOTES: A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Tape and Reel information for the Format Lead Option package.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products & application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265