

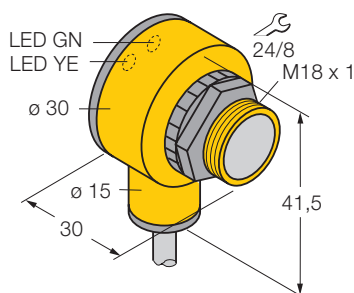


Photoelectric sensor diffuse mode sensor with background suppression T18SP6FF50



- selectable light or dark operation or light operation with alarm function
- cable, 2 m
- operational voltage 10..0.30 VDC
- degree of protection IP69K


Wiring diagram



The emitter and receiver are incorporated in a single housing. The light reflection of the target is detected and triggers the sensor to switch. Thus the switching distance depends largely on the reflectivity of the target.

Excess gain curve

Excess gain in relation to the distance



Type	T18SP6FF50
Ident-No.	3463800
Operating mode	Diffuse mode sensors with fixed-field background suppression
Type of light	IR
Wave length	880 nm
Sensing range [mm]	0... 50 mm
Operating temperature	-40 ...+ 70 °C
Rated operational voltage (DC) U_B	10... 30 VDC
Rated operational current (DC) I _e	≤ 150 mA
No-load current I ₀	≤ 35 mA
Short-circuit protection	yes, cyclic
Reverse polarity protection	yes
Output function	connection programmable, PNP
Switching frequency	≤ 160 Hz
Max. switch-on delay	≤ 100 ms
Overload trip point	>220 mA
Housing style	cylindrical/thread; T18
Dimensions	30 x 30 x 41,5 mm
Housing material	plastic, PBT
Lens	Plastic, Acryl
Wiring	cable
Cable length	2 m
Cable cross section	4 x 0,5 mm ²
Degree of protection	IP68 - IP69K
Supply voltage indication	LED green
Switching status indication	LED yellow
Error indication	LED green flashing
Alarm indication	LED yellow flashing