

KA-BAND QPSK/BPSK PHASE MODULATOR

VS-QPSK-PM (TLC PMLB04)

- 36 to 40 GHz
- Insertion Loss < 6 dB
- Direct Phase Modulation
- Fast Switching (nsec)
- Negligible Power Consumption

DESCRIPTION AND APPLICATIONS

The VS-QPSK-PM is a delay line phase shifter which can be operated as a digital phase modulator for up to 5% fractional bandwidth.


The flat insertion loss provided by the VS-QPSK-PM makes it an excellent candidate for use as a digital phase modulator in angle modulation communication systems.

PERFORMANCE SUMMARY


Parameter (@ 25°C)	Min	Typ	Max
Frequency (GHz)	29	—	32
Insertion Loss (dB)	2	4	6
Delta Insertion Loss (dB)	—	1	—
DC Power (mW)	—	0	—

OPERATING CONDITIONS

$V_{gs} = 0$ to 4.5 V $V_{ds} = 0$ V
Max Input Power Levels < 23 dBm

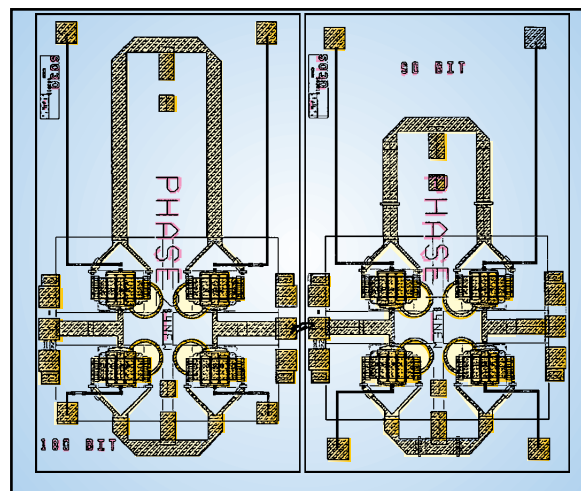

Size: 2.6 x 2.17 x 0.1 mm

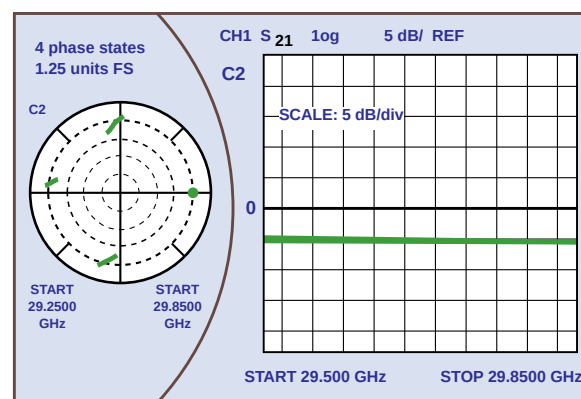

ASSEMBLY

Ti/Pt/Au metallization is used for the bond pads and backside which is compatible with eutectic die attach and thermocompression or thermosonic bonding. Either 3 mil Au ribbon or 1 mil Au wire may be used to connect the MMW and DC pads to the system.

Additional DC bypass capacitors (22 pF & 0.1 μ F) are recommended.

The data contained in this data sheet is for information only. TLC reserves the right to change this product without notice.



TLC PRECISION WAFER TECHNOLOGY, INC.

1411 West River Road North ~ Minneapolis, MN 55411
tele: 612-341-2795 ~ fax: 612-341-2799 ~ email: sales@tlcprecision.com ~ web: www.tlcprecision.com