

## 74VCX38

### Low Voltage Quad 2-Input NAND Gate with Open Drain Outputs and 3.6V Tolerant Inputs and Outputs

#### General Description

The VCX38 contains four 2-input NAND gates with open drain outputs. This product is designed for low voltage (1.2V to 3.6V)  $V_{CC}$  applications with I/O compatibility up to 3.6V.

The VCX38 is fabricated with advanced CMOS technology to achieve high-speed operation while maintaining CMOS low power dissipation.

#### Features


- 1.2V to 3.6V  $V_{CC}$  supply operation
- 3.6V tolerant inputs and outputs
- $t_{PD}$   
2.8 ns max for 3.0V to 3.6V  $V_{CC}$
- Power-Off high impedance inputs and outputs
- Static Drive ( $I_{OL}$ )  
+24 mA @ 3.0V  $V_{CC}$
- Uses patented Quiet Series™ noise/EMI reduction circuitry
- Latchup performance exceeds 300 mA
- ESD performance:  
Human body model > 2000V  
Machine model > 250V

#### Ordering Code:


| Order Number | Package Number | Package Description                                                          |
|--------------|----------------|------------------------------------------------------------------------------|
| 74VCX38M     | M14A           | 14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow |
| 74VCX38MTC   | MTC14          | 14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide  |

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

#### Logic Symbol



#### Connection Diagram



#### Pin Descriptions

| Pin Names  | Description |
|------------|-------------|
| $A_n, B_n$ | Inputs      |
| $O_n$      | Outputs     |

Quiet Series™ is a trademark of Fairchild Semiconductor Corporation.

**Absolute Maximum Ratings**(Note 1)

|                                            |                 |
|--------------------------------------------|-----------------|
| Supply Voltage ( $V_{CC}$ )                | –0.5V to +4.6V  |
| DC Input Voltage ( $V_I$ )                 | –0.5V to +4.6V  |
| Output Voltage ( $V_O$ ) (Note 2)          | –0.5V to +4.6V  |
| DC Input Diode Current ( $I_{IK}$ )        |                 |
| $V_I < 0V$                                 | –50 mA          |
| DC Output Diode Current ( $I_{OK}$ )       |                 |
| $V_O < 0V$                                 | –50 mA          |
| DC Output Source/Sink Current ( $I_{OL}$ ) | +50 mA          |
| DC $V_{CC}$ or Ground Current per          | ±100 mA         |
| Supply Pin ( $I_{CC}$ or Ground)           |                 |
| Storage Temperature Range ( $T_{stg}$ )    | –65°C to +150°C |

**Recommended Operating Conditions** (Note 3)

|                                                 |                |
|-------------------------------------------------|----------------|
| Power Supply                                    |                |
| Operating                                       | 1.2V to 3.6V   |
| Input Voltage                                   | –0.3V to 3.6V  |
| Output Voltage ( $V_O$ )                        | 0V to 3.6V     |
| Output Current in $I_{OL}$                      |                |
| $V_{CC} = 3.0V$ to 3.6V                         | +24 mA         |
| $V_{CC} = 2.3V$ to 2.7V                         | +18 mA         |
| $V_{CC} = 1.65V$ to 2.3V                        | +6 mA          |
| $V_{CC} = 1.4V$ to 1.6V                         | +2 mA          |
| $V_{CC} = 1.2V$                                 | ±100 $\mu A$   |
| Free Air Operating Temperature ( $T_A$ )        | –40°C to +85°C |
| Minimum Input Edge Rate ( $\Delta t/\Delta V$ ) |                |
| $V_{in} = 0.8V$ to 2.0V, $V_{CC} = 3.0V$        | 10 ns/V        |

**Note 1:** The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the Absolute Maximum Ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

**Note 2:**  $I_O$  Absolute Maximum Rating must be observed.

**Note 3:** Floating or unused inputs must be held HIGH or LOW

**DC Electrical Characteristics**

| Symbol          | Parameter                      | Conditions                                                                                                                                                                                                                                                                                                             | $V_{CC}$<br>(V)                                                                                            | Min                                                                                | Max                                                                                 | Units   |
|-----------------|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| $V_{IH}$        | HIGH Level Input Voltage       |                                                                                                                                                                                                                                                                                                                        | 2.7 - 3.6<br>2.3 - 2.7<br>1.65 - 2.3<br>1.4 - 1.6<br>1.2                                                   | 2.0<br>1.6<br>$0.65 \times V_{CC}$<br>$0.65 \times V_{CC}$<br>$0.65 \times V_{CC}$ |                                                                                     | V       |
| $V_{IL}$        | LOW Level Input Voltage        |                                                                                                                                                                                                                                                                                                                        | 2.7 - 3.6<br>2.3 - 2.7<br>1.65 - 2.3<br>1.4 - 1.6<br>1.2                                                   |                                                                                    | 0.8<br>0.7<br>$0.35 \times V_{CC}$<br>$0.35 \times V_{CC}$<br>$0.05 \times V_{CC}$  | V       |
| $V_{OL}$        | LOW Level Output Voltage       | $I_{OL} = 100 \mu A$<br>$I_{OL} = 12 \text{ mA}$<br>$I_{OL} = 18 \text{ mA}$<br>$I_{OL} = 24 \text{ mA}$<br>$I_{OL} = 100 \mu A$<br>$I_{OL} = 12 \text{ mA}$<br>$I_{OL} = 18 \text{ mA}$<br>$I_{OL} = 100 \mu A$<br>$I_{OL} = 6 \text{ mA}$<br>$I_{OL} = 100 \mu A$<br>$I_{OL} = 2 \text{ mA}$<br>$I_{OL} = 100 \mu A$ | 2.7 - 3.6<br>2.7<br>3.0<br>3.0<br>2.3 - 2.7<br>2.3<br>2.3<br>1.65 - 2.3<br>1.65<br>1.4 - 1.6<br>1.4<br>1.2 |                                                                                    | 0.2<br>0.4<br>0.4<br>0.55<br>0.2<br>0.4<br>0.6<br>0.2<br>0.3<br>0.2<br>0.35<br>0.05 | V       |
| $I_I$           | Input Leakage Current          | $0 \leq V_I \leq 3.6V$                                                                                                                                                                                                                                                                                                 | 1.2 - 3.6                                                                                                  |                                                                                    | ±5.0                                                                                | $\mu A$ |
| $I_{OFF}$       | Power-Off Leakage Current      | $0 \leq (V_I, V_O) \leq 3.6V$                                                                                                                                                                                                                                                                                          | 0                                                                                                          |                                                                                    | 10.0                                                                                | $\mu A$ |
| $I_{CC}$        | Quiescent Supply Current       | $V_I = V_{CC}$ or GND<br>$V_{CC} \leq (V_I) \leq 3.6V$                                                                                                                                                                                                                                                                 | 1.2 - 3.6<br>1.2 - 3.6                                                                                     |                                                                                    | 20.0<br>±20.0                                                                       | $\mu A$ |
| $\Delta I_{CC}$ | Increase in $I_{CC}$ per Input | $V_{IH} = V_{CC} - 0.6V$                                                                                                                                                                                                                                                                                               | 2.7 - 3.6                                                                                                  |                                                                                    | 750                                                                                 | $\mu A$ |
| $I_{OHZ}$       | Off State Current              | $V_O = 3.6$                                                                                                                                                                                                                                                                                                            | 1.2 - 3.6                                                                                                  |                                                                                    | 10.0                                                                                | $\mu A$ |

**AC Electrical Characteristics** (Note 4)

| Symbol                                   | Parameter                         | Conditions                                    | V <sub>CC</sub><br>(V) | T <sub>A</sub> = -40°C to +85°C |      | Units | Figure<br>Number |
|------------------------------------------|-----------------------------------|-----------------------------------------------|------------------------|---------------------------------|------|-------|------------------|
|                                          |                                   |                                               |                        | Min                             | Max  |       |                  |
| t <sub>PZL</sub> ,<br>t <sub>PLZ</sub>   | Propagation Delay                 | C <sub>L</sub> = 30 pF, R <sub>L</sub> = 500Ω | 3.3 ± 0.3              | 0.6                             | 2.8  | ns    | Figures<br>1, 2  |
|                                          |                                   |                                               | 2.5 ± 0.2              | 0.8                             | 3.7  |       |                  |
|                                          |                                   |                                               | 1.8 ± 0.15             | 1.0                             | 6.7  |       |                  |
|                                          |                                   | C <sub>L</sub> = 15 pF, R <sub>L</sub> = 2kΩ  | 1.5 ± 0.1              | 1.0                             | 13.4 |       | Figures<br>3, 4  |
|                                          |                                   |                                               | 1.2                    |                                 | 33.5 |       |                  |
| t <sub>OSHL</sub> ,<br>t <sub>OSLH</sub> | Output to Output Skew<br>(Note 5) | C <sub>L</sub> = 30 pF, R <sub>L</sub> = 500Ω | 3.3 ± 0.3              |                                 | 0.5  | ns    |                  |
|                                          |                                   |                                               | 2.5 ± 0.2              |                                 | 0.5  |       |                  |
|                                          |                                   |                                               | 1.8 ± 0.15             |                                 | 0.75 |       |                  |
|                                          |                                   | C <sub>L</sub> = 15 pF, R <sub>L</sub> = 2kΩ  | 1.5 ± 0.1              |                                 | 1.5  |       |                  |
|                                          |                                   |                                               | 1.2                    |                                 | 1.5  |       |                  |

**Note 4:** For C<sub>L</sub> = 50pF, add approximately 300 ps to the 30 pF AC maximum specification.

**Note 5:** Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>).


**Dynamic Switching Characteristics**

| Symbol           | Parameter                                   | Conditions                                                                       | V <sub>CC</sub><br>(V) | T <sub>A</sub> = +25°C | Units |
|------------------|---------------------------------------------|----------------------------------------------------------------------------------|------------------------|------------------------|-------|
|                  |                                             |                                                                                  |                        | Typical                |       |
| V <sub>OLP</sub> | Quiet Output Dynamic Peak V <sub>OL</sub>   | C <sub>L</sub> = 30 pF, V <sub>IH</sub> = V <sub>CC</sub> , V <sub>IL</sub> = 0V | 1.8                    | 0.25                   | V     |
|                  |                                             |                                                                                  | 2.5                    | 0.6                    |       |
|                  |                                             |                                                                                  | 3.3                    | 0.8                    |       |
| V <sub>OLV</sub> | Quiet Output Dynamic Valley V <sub>OL</sub> | C <sub>L</sub> = 30 pF, V <sub>IH</sub> = V <sub>CC</sub> , V <sub>IL</sub> = 0V | 1.8                    | -0.25                  | V     |
|                  |                                             |                                                                                  | 2.5                    | -0.6                   |       |
|                  |                                             |                                                                                  | 3.3                    | -0.8                   |       |

**Capacitance**

| Symbol           | Parameter                     | Conditions                                                                                | T <sub>A</sub> = +25°C | Units |
|------------------|-------------------------------|-------------------------------------------------------------------------------------------|------------------------|-------|
|                  |                               |                                                                                           | Typical                |       |
| C <sub>IN</sub>  | Input Capacitance             | V <sub>I</sub> = 0V OR V <sub>CC</sub> , V <sub>CC</sub> = 1.8V, 2.5V or 3.3V             | 6.0                    | pF    |
| C <sub>OUT</sub> | Output Capacitance            | V <sub>I</sub> = 0V or V <sub>CC</sub> , V <sub>CC</sub> = 1.8V, 2.5V or 3.3V             | 7.0                    | pF    |
| C <sub>PD</sub>  | Power Dissipation Capacitance | V <sub>I</sub> = 0V or V <sub>CC</sub> , f = 10 MHz, V <sub>CC</sub> = 1.8V, 2.5V or 3.3V | 20.0                   | pF    |

AC Loading and Waveforms ( $V_{CC}$  3.3V ± 0.3V to 1.8V ± 0.15V)

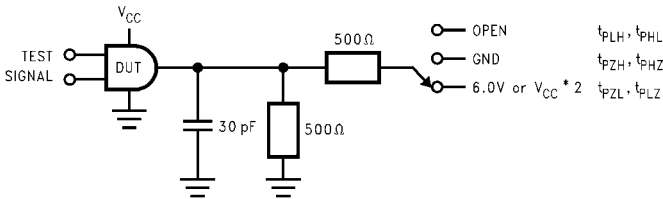

| TEST                  | SWITCH                                                                                  |
|-----------------------|-----------------------------------------------------------------------------------------|
| $t_{PZL}$ , $t_{PLZ}$ | 6V at $V_{CC} = 3.3 \pm 0.3V$ ;<br>$V_{CC} \times 2$ at $V_{CC} = 2.5V \pm 0.2V$ ; 1.8V |

FIGURE 1. AC Test Circuit


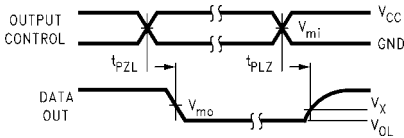


FIGURE 2. Waveform for Open Drain, Inverting and Non-inverting Functions

| Symbol   | $V_{CC}$        |                  |                  |
|----------|-----------------|------------------|------------------|
|          | 3.3V ± 0.3V     | 2.5V ± 0.2V      | 1.8V ± 0.15V     |
| $V_{mi}$ | 1.5V            | $V_{CC}/2$       | $V_{CC}/2$       |
| $V_{mo}$ | 1.5V            | $V_{CC}/2$       | $V_{CC}/2$       |
| $V_x$    | $V_{OL} + 0.3V$ | $V_{OL} + 0.15V$ | $V_{OL} + 0.15V$ |

# AC Loading and Waveforms ( $V_{CC} 1.5 \pm 0.1V$ to $1.2V$ )

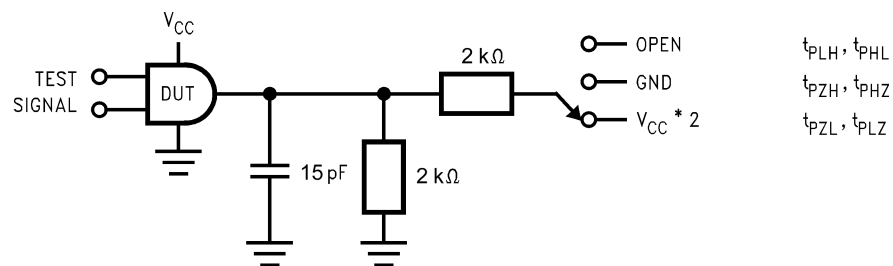

| TEST               | SWITCH                                        |
|--------------------|-----------------------------------------------|
| $t_{PZL}, t_{PLZ}$ | $V_{CC} \times 2$ at $V_{CC} = 1.5V \pm 0.1V$ |

FIGURE 3. AC Test Circuit


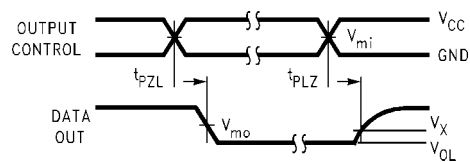






FIGURE 4. 3-STATE Output Low Enable and Disable Times for Low Voltage Logic

| Symbol   | $V_{CC}$        |
|----------|-----------------|
|          | $1.5V \pm 0.1V$ |
| $V_{mi}$ | $V_{CC}/2$      |
| $V_{mo}$ | $V_{CC}/2$      |
| $V_x$    | $V_{OL} + 0.1V$ |
| $V_Y$    | $V_{OH} - 0.1V$ |

# Physical Dimensions inches (millimeters) unless otherwise noted

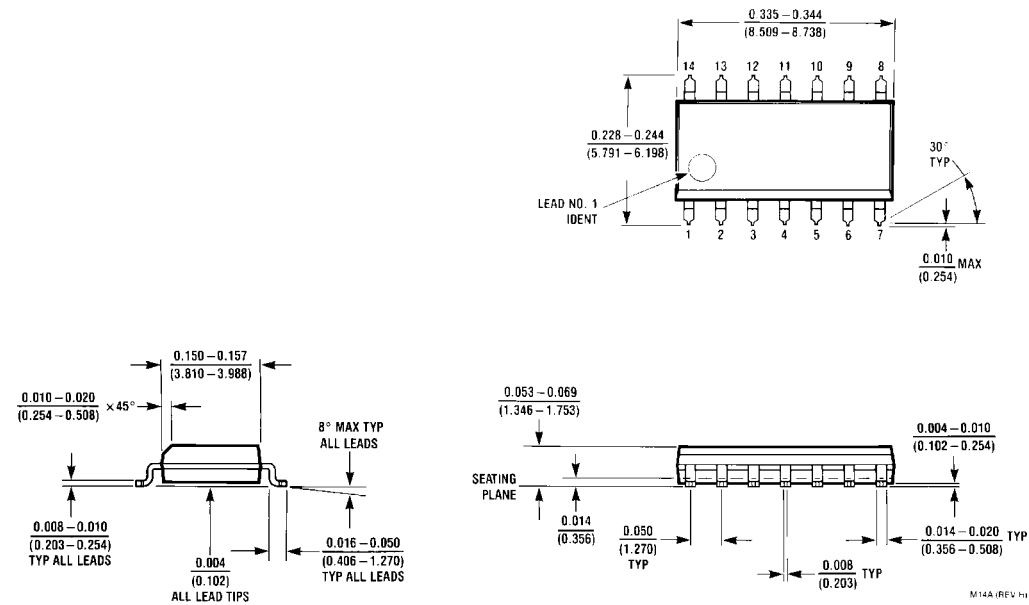

14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow  
Package Number M14A

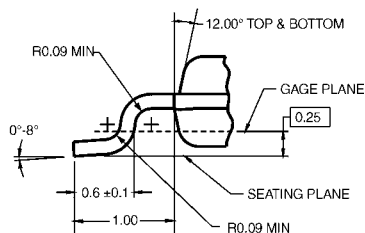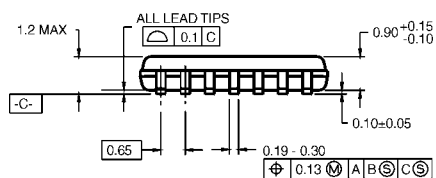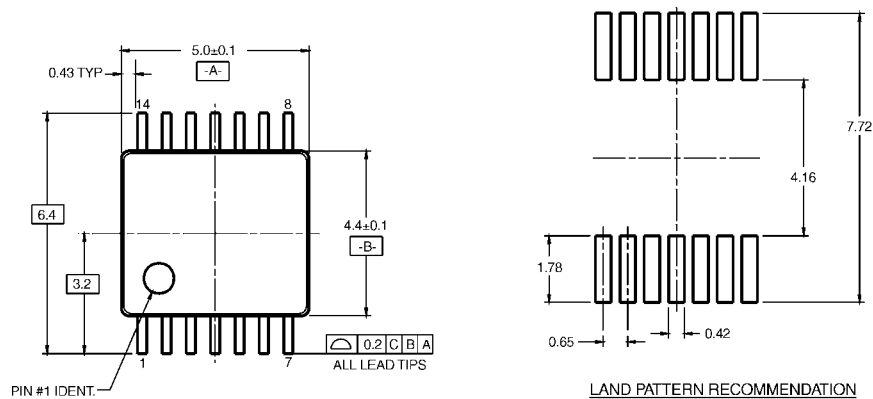**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-153, VARIATION AB, REF NOTE 6, DATE 7/93.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982.

MTC14RevC3

### DETAIL A

**14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide  
Package Number MTC14**

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
  2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.
- www.fairchildsemi.com**

www.fairchildsemi.com