



ZMM1 thru ZMM75


Zener Diodes

Zener Voltage Range: 1.0, 2.4 to 75 Volts

Power Dissipation: 500mW

Features

- ◆ Silicon Planar Zener Diodes
- ◆ In MiniMELF case especially for automatic insertion
- ◆ The Zener voltages are graded according to the international E 24 standard. Offered with either 5% or 2% tolerance. Smaller voltage tolerances and other Zener voltages are available upon request.
- ◆ These diodes are also available in DO-35 case with the type designation ZPD1 ... ZPD51




MiniMELF (SOD-80C)

Mechanical Data

- ◆ Case: MiniMELF Glass Case (SOD-80C)
- ◆ Weight: approx. 0.05g

Cathode Mark

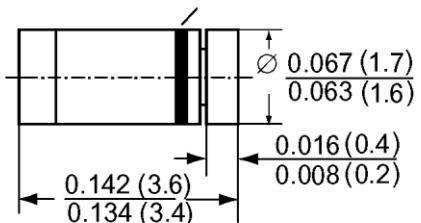

Dimensions in inches and (millimeters)

Maximum Ratings and Thermal Characteristics

($T_A=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|--------------------------------------------------------|------------------|--------------------|------|
| Zener current (see Table "Characteristics") | | | |
| Power dissipation at $T_{\text{amb}}=25^\circ\text{C}$ | P_{tot} | 500 ⁽¹⁾ | mW |
| Thermal resistance junction to ambient air | R_{JJA} | 300 ⁽¹⁾ | °C/W |
| Junction temperature | T_j | 175 | °C |
| Storage temperature range | T_s | -55 to +175 | °C |

Notes: 1. Valid provided that electrodes are kept at ambient temperature.

Electrical Characteristics

($T_A=25^\circ\text{C}$ unless otherwise noted)

| Type number add suffix SB14301 for +2% tol. | Dynamic resistance | | Temp. coefficient of zener voltage at $I_z=5\text{mA}$ $\alpha V_z (10^{-4} / ^\circ\text{C})$ | | Maximum reverse leakage current | | Admissible zener current ⁽²⁾ | |
|---------------------------------------------------|----------------------------------------------------------|----------------------------------------------------------|---------------------------------------------------------------------------------------------------|------|---------------------------------|---------------------|-----------------------------------------------------------|-----------------------------------------------------------|
| | at $I_z=5\text{mA}$ $f=1\text{kHz}$ $r_z (\Omega)$ | at $I_z=1\text{mA}$ $f=1\text{kHz}$ $r_z (\Omega)$ | Min. | Max. | I_R (μA) | at V_R (Volts) | at $T_{\text{amb}}=45^\circ\text{C}$ $I_z (\text{mA})$ | at $T_{\text{amb}}=25^\circ\text{C}$ $I_z (\text{mA})$ |
| ZMM1 ⁽³⁾ | 6.5 (< 8) | < 50 | -26 | -23 | - | - | 280 | 340 |
| ZMM2.4 | < 100 | < 600 | -10 | -5 | 50 | 0.8 | 152 | 175 |
| ZMM2.7 | 75 (< 83) | < 500 | -9 | -4 | 20 | 0.8 | 135 | 160 |
| ZMM3 | 80 (< 95) | < 500 | -9 | -3 | 20 | 0.8 | 117 | 140 |
| ZMM3.3 | 80 (< 95) | < 500 | -8 | -3 | 6 | 0.8 | 109 | 130 |
| ZMM3.6 | 80 (< 95) | < 500 | -8 | -3 | 6 | 0.8 | 101 | 120 |
| ZMM3.9 | 80 (< 95) | < 500 | -7 | -3 | 1.6 | 0.8 | 92 | 110 |
| ZMM4.3 | 80 (< 95) | < 500 | -6 | -1 | 1.0 | 0.8 | 85 | 100 |
| ZMM4.7 | 70 (< 78) | < 500 | -5 | +2 | 0.1 | 0.8 | 76 | 90 |
| ZMM5.1 | 30 (< 60) | < 480 | -3 | +4 | 0.1 | 0.8 | 67 | 80 |
| ZMM5.6 | 10 (< 40) | < 400 | -2 | +6 | 0.1 | 1 | 59 | 70 |
| ZMM6.2 | 4.8 (< 10) | < 200 | -1 | +7 | 0.1 | 2 | 54 | 64 |
| ZMM6.8 | 4.5 (< 8) | < 150 | +2 | +7 | 0.1 | 3 | 49 | 58 |
| ZMM7.5 | 4 (< 7) | < 50 | +3 | +7 | 0.1 | 5 | 44 | 53 |
| ZMM8.2 | 4.5 (< 7) | < 50 | +4 | +7 | 0.1 | 6 | 40 | 47 |
| ZMM9.1 | 4.8 (< 10) | < 50 | +5 | +8 | 0.1 | 7 | 36 | 43 |
| ZMM10 | 5.2 (< 15) | < 70 | +5 | +8 | 0.1 | 7.5 | 33 | 40 |
| ZMM11 | 6 (< 20) | < 70 | +5 | +9 | 0.1 | 8.5 | 30 | 36 |
| ZMM12 | 7 (< 20) | < 90 | +6 | +9 | 0.1 | 9 | 28 | 32 |
| ZMM13 | 9 (< 25) | < 110 | +7 | +9 | 0.1 | 10 | 25 | 29 |
| ZMM15 | 11 (< 30) | < 110 | +7 | +9 | 0.1 | 11 | 23 | 27 |
| ZMM16 | 13 (< 40) | < 170 | +8 | +9.5 | 0.1 | 12 | 20 | 24 |
| ZMM18 | 18 (< 50) | < 170 | +8 | +9.5 | 0.1 | 14 | 18 | 21 |
| ZMM20 | 20 (< 50) | < 220 | +8 | +10 | 0.1 | 15 | 17 | 20 |
| ZMM22 | 25 (< 55) | < 220 | +8 | +10 | 0.1 | 17 | 16 | 18 |
| ZMM24 | 28 (< 80) | < 220 | +8 | +10 | 0.1 | 18 | 13 | 16 |
| ZMM27 | 30 (< 80) | < 250 | +8 | +10 | 0.1 | 20 | 12 | 14 |
| ZMM30 | 35 (< 80) | < 250 | +8 | +10 | 0.1 | 22.5 | 10 | 13 |
| ZMM33 | 40 (< 80) | < 250 | +8 | +10 | 0.1 | 25 | 9 | 12 |
| ZMM36 | 40 (< 90) | < 250 | +8 | +10 | 0.1 | 27 | 9 | 11 |
| ZMM39 | 50 (< 90) | < 300 | +10 | +12 | 0.1 | 29 | 8 | 10 |
| ZMM43 | 60 (< 100) | < 700 | +10 | +12 | 0.1 | 32 | 7 | 9.2 |
| ZMM47 | 70 (< 100) | < 750 | +10 | +12 | 0.1 | 35 | 6 | 8.5 |
| ZMM51 | 70 (< 100) | < 750 | +10 | +12 | 0.1 | 38 | 6 | 7.8 |
| ZMM56 | < 135 ⁽⁴⁾ | < 1000 ⁽⁵⁾ | typ. +10 ⁽⁴⁾ | - | 0.1 | 42 | 5.2 | 7.1 |
| ZMM62 | < 150 ⁽⁴⁾ | < 1000 ⁽⁵⁾ | typ. +10 ⁽⁴⁾ | - | 0.1 | 47 | 4.8 | 6.4 |
| ZMM68 | < 200 ⁽⁴⁾ | < 1000 ⁽⁵⁾ | typ. +10 ⁽⁴⁾ | - | 0.1 | 51 | 4.1 | 5.8 |
| ZMM75 | < 250 ⁽⁴⁾ | < 1500 ⁽⁵⁾ | typ. +10 ⁽⁴⁾ | - | 0.1 | 55 | 3.9 | 5.3 |

Notes: 1. Tested with pulses $t_p=5\text{ms}$

2. Valid provided that electrodes are kept at ambient temperature

3. The ZMM1 is a silicon diode operated in forward direction Hence, the index of all parameters should be "F" instead of "Z" Connect the cathode electrode to the negative pole

4. at $I_z=2.5\text{mA}$

5. at $I_z=0.5\text{mA}$

Electrical Characteristics

($T_A=25^\circ\text{C}$ unless otherwise noted)

| Type number ±5% Tol. | Zener voltage range ⁽¹⁾ at I_z V_z (Volts) | | Test current I_z (mA) |
|-------------------------|--------------------------------------------------------------|------|----------------------------|
| | Min. | Max. | |
| ZMM1 ⁽²⁾ | 0.70 | 0.80 | 5.0 |
| ZMM2.4 | 2.20 | 2.60 | 5.0 |
| ZMM2.7 | 2.50 | 2.90 | 5.0 |
| ZMM3 | 2.80 | 3.20 | 5.0 |
| ZMM3.3 | 3.10 | 3.50 | 5.0 |
| ZMM3.6 | 3.40 | 3.80 | 5.0 |
| ZMM3.9 | 3.70 | 4.10 | 5.0 |
| ZMM4.3 | 4.00 | 4.60 | 5.0 |
| ZMM4.7 | 4.40 | 5.00 | 5.0 |
| ZMM5.1 | 4.80 | 5.40 | 5.0 |
| ZMM5.6 | 5.20 | 6.00 | 5.0 |
| ZMM6.2 | 5.80 | 6.60 | 5.0 |
| ZMM6.8 | 6.40 | 7.20 | 5.0 |
| ZMM7.5 | 7.00 | 7.90 | 5.0 |
| ZMM8.2 | 7.70 | 8.70 | 5.0 |
| ZMM9.1 | 8.50 | 9.60 | 5.0 |
| ZMM10 | 9.40 | 10.6 | 5.0 |
| ZMM11 | 10.4 | 11.6 | 5.0 |
| ZMM12 | 11.4 | 12.7 | 5.0 |
| ZMM13 | 12.4 | 14.1 | 5.0 |
| ZMM15 | 13.8 | 15.6 | 5.0 |
| ZMM16 | 15.3 | 17.1 | 5.0 |
| ZMM18 | 16.8 | 19.1 | 5.0 |
| ZMM20 | 18.8 | 21.2 | 5.0 |
| ZMM22 | 20.8 | 23.3 | 5.0 |
| ZMM24 | 22.8 | 25.6 | 5.0 |
| ZMM27 | 25.1 | 28.9 | 5.0 |
| ZMM30 | 28.0 | 32.0 | 5.0 |
| ZMM33 | 31.0 | 35.0 | 5.0 |
| ZMM36 | 34.0 | 38.0 | 5.0 |
| ZMM39 | 37.0 | 41.0 | 5.0 |
| ZMM43 | 40.0 | 46.0 | 5.0 |
| ZMM47 | 44.0 | 50.0 | 5.0 |
| ZMM51 | 48.0 | 54.0 | 5.0 |
| ZMM56 | 52.0 | 60.0 | 2.5 |
| ZMM62 | 58.0 | 66.0 | 2.5 |
| ZMM68 | 64.0 | 72.0 | 2.5 |
| ZMM75 | 70.0 | 79.0 | 2.5 |

Notes: 1. Measured with pulses $t_p=5\text{ ms}$

2. The ZMM1 is a silicon diode operated in forward direction. Hence, the index of all parameters should be "F" instead of "Z". Connect the cathode electrode to the negative pole


| Type number add suffix SB14301 ±2% Tol. | Zener voltage range ⁽¹⁾ at I_z V_z (Volts) | | Test current I_z (mA) |
|-----------------------------------------------|--------------------------------------------------------------|------|----------------------------|
| | Min. | Max. | |
| ZMM1 ⁽³⁾ | - | - | - |
| ZMM2.4 | - | - | - |
| ZMM2.7 | 2.65 | 2.75 | 5.0 |
| ZMM3 | 2.94 | 3.06 | 5.0 |
| ZMM3.3 | 3.23 | 3.37 | 5.0 |
| ZMM3.6 | 3.53 | 3.67 | 5.0 |
| ZMM3.9 | 3.82 | 3.98 | 5.0 |
| ZMM4.3 | 4.21 | 4.39 | 5.0 |
| ZMM4.7 | 4.61 | 4.79 | 5.0 |
| ZMM5.1 | 5.00 | 5.20 | 5.0 |
| ZMM5.6 | 5.49 | 5.71 | 5.0 |
| ZMM6.2 | 6.08 | 6.32 | 5.0 |
| ZMM6.8 | 6.66 | 6.94 | 5.0 |
| ZMM7.5 | 7.35 | 7.65 | 5.0 |
| ZMM8.2 | 8.04 | 8.36 | 5.0 |
| ZMM9.1 | 8.92 | 9.28 | 5.0 |
| ZMM10 | 9.80 | 10.2 | 5.0 |
| ZMM11 | 10.8 | 11.2 | 5.0 |
| ZMM12 | 11.8 | 12.2 | 5.0 |
| ZMM13 | 12.7 | 13.3 | 5.0 |
| ZMM15 | 14.7 | 15.3 | 5.0 |
| ZMM16 | 15.7 | 16.3 | 5.0 |
| ZMM18 | 17.6 | 18.4 | 5.0 |
| ZMM20 | 19.6 | 20.4 | 5.0 |
| ZMM22 | 21.6 | 22.4 | 5.0 |
| ZMM24 | 23.5 | 24.5 | 5.0 |
| ZMM27 | 26.5 | 27.5 | 5.0 |
| ZMM30 | 29.4 | 30.6 | 5.0 |
| ZMM33 | 32.3 | 33.7 | 5.0 |
| ZMM36 | 35.3 | 36.7 | 5.0 |
| ZMM39 | 38.2 | 39.8 | 5.0 |
| ZMM43 | 42.1 | 43.9 | 5.0 |
| ZMM47 | 46.1 | 47.9 | 5.0 |
| ZMM51 | 50.0 | 52.0 | 5.0 |
| ZMM56 | 54.9 | 57.1 | 2.5 |
| ZMM62 | 60.8 | 63.2 | 2.5 |
| ZMM68 | 66.6 | 69.4 | 2.5 |
| ZMM75 | 73.5 | 76.5 | 2.5 |

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)


Breakdown characteristics

$T_J = \text{constant (pulsed)}$

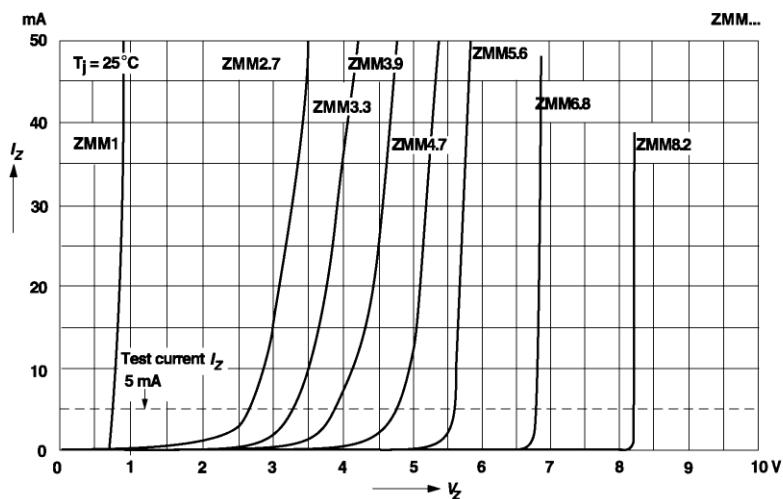

Breakdown characteristics

$T_J = \text{constant (pulsed)}$

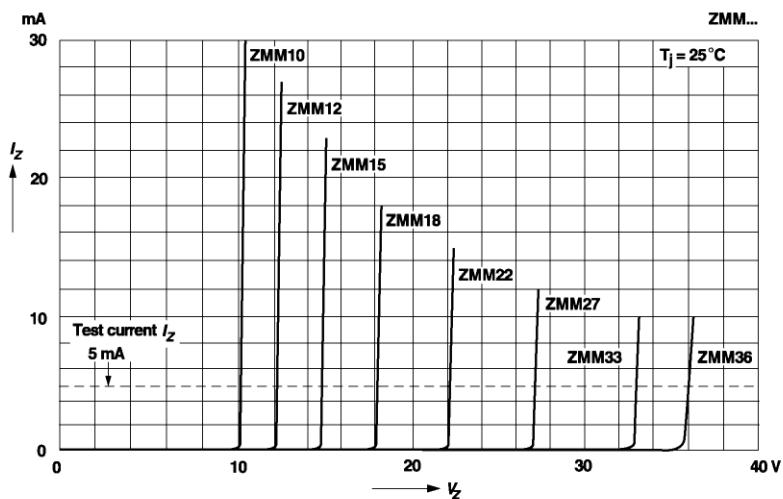


RATINGS AND CHARACTERISTIC CURVES


($T_A = 25^\circ\text{C}$ unless otherwise noted)

Breakdown characteristics

$T_J = \text{constant (pulsed)}$

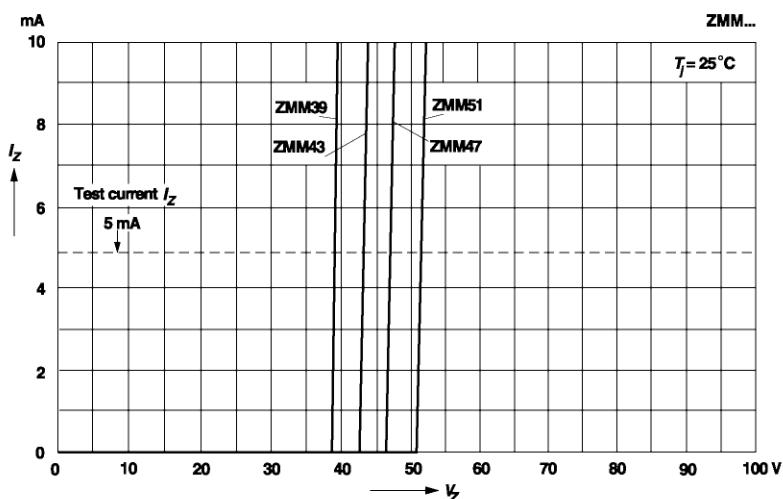


Forward characteristics

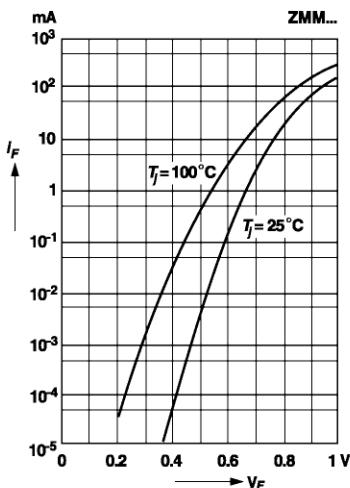

Admissible power dissipation versus ambient temperature

Valid provided that electrodes are kept at ambient temperature

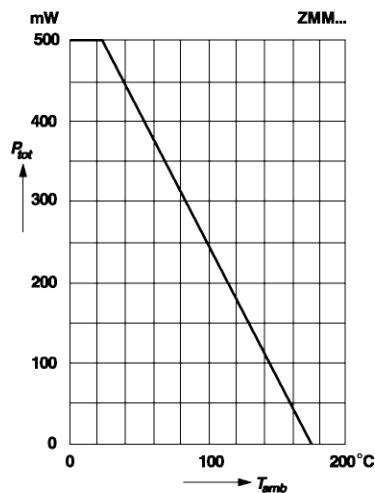


RATINGS AND CHARACTERISTIC CURVES


($T_A = 25^\circ\text{C}$ unless otherwise noted)

Pulse thermal resistance versus pulse duration


Valid provided that the electrodes are kept at ambient temperature

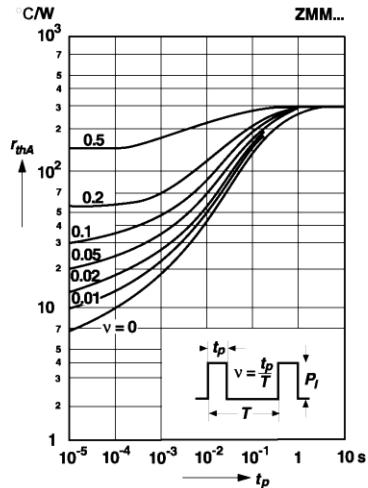


Dynamic resistance versus Zener current

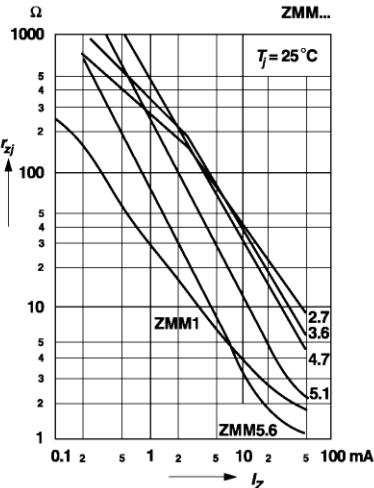

Capacitance versus Zener voltage

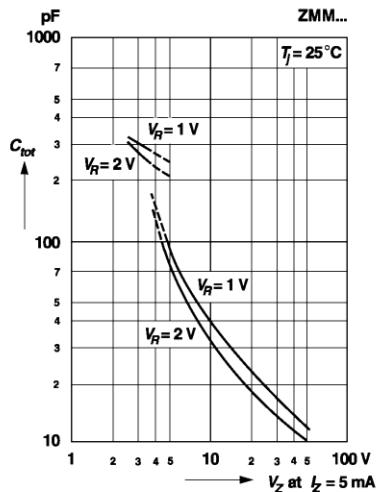


Dynamic resistance versus Zener current

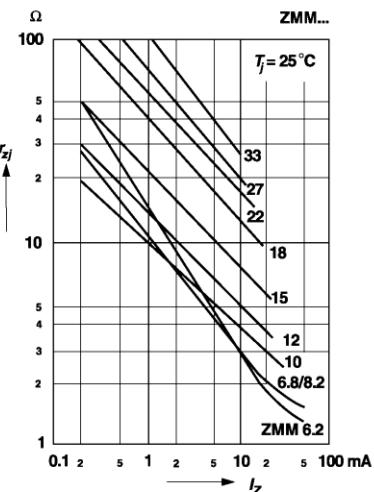

RATINGS AND CHARACTERISTIC CURVES


($T_A=25^\circ\text{C}$ unless otherwise noted)

**Dynamic resistance
versus Zener current**

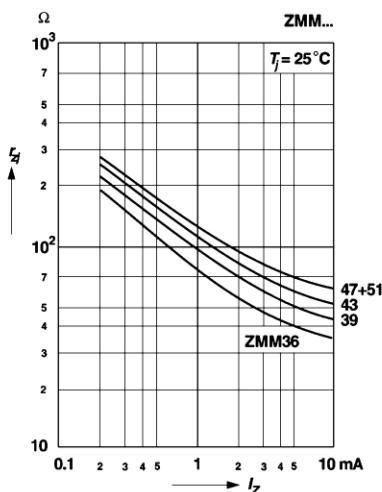


**Thermal differential resistance
versus Zener voltage**


Valid provided that electrodes are kept
at ambient temperature

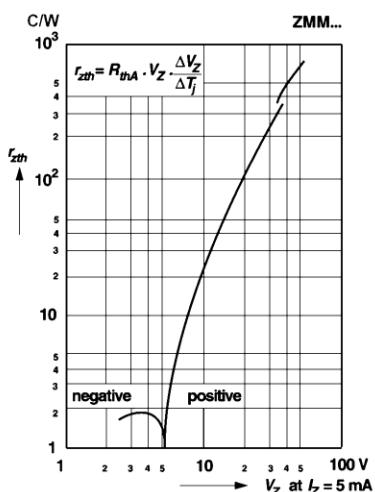

**Dynamic resistance
versus Zener voltage**

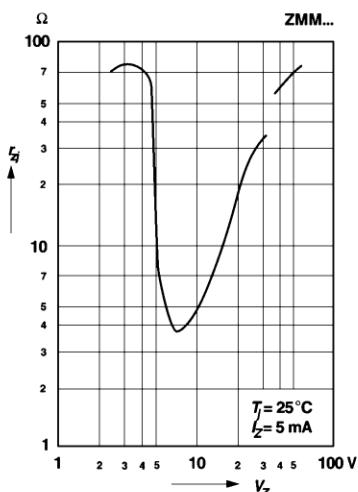


**Temperature dependence of Zener voltage
versus Zener voltage**

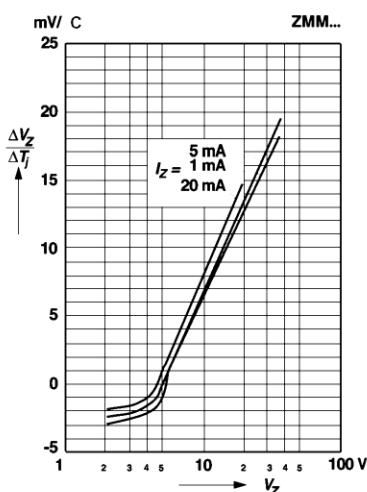


RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)


Temperature dependence of Zener voltage versus Zener voltage

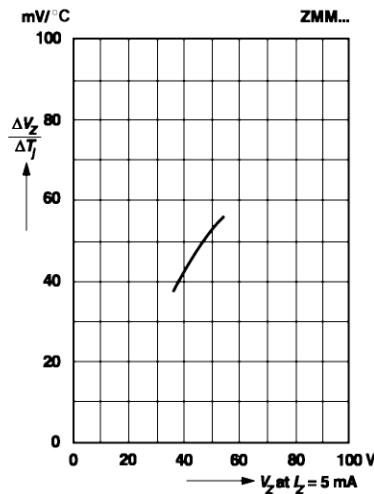


Change of Zener voltage versus junction temperature

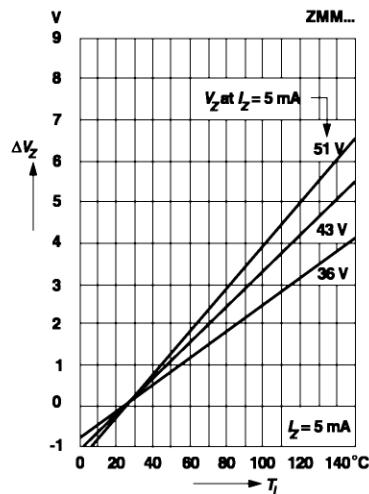

Change of Zener voltage versus junction temperature

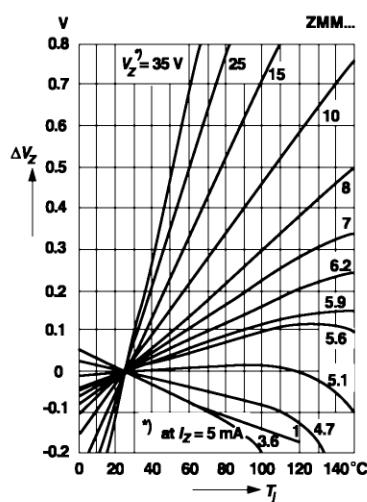

Change of Zener voltage from turn-on up to the point of thermal equilibrium versus Zener voltage

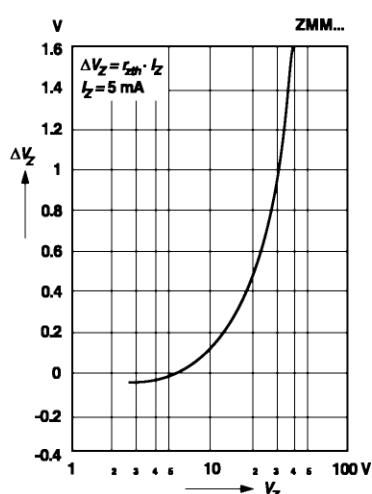

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

**Change of Zener voltage from turn-on
up to the point of thermal equilibrium
versus Zener voltage**

