


Mixers

Double Balanced

Applications

- Wideband Down Converters
- Wideband Up Converters
- Balanced Modulators
- Bi-Phase Modulators
- Phase Detectors

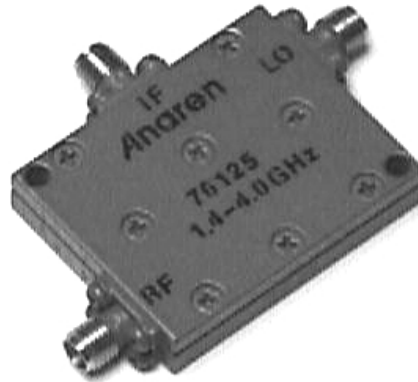

Features


- Wide IF Bandwidth
- Excellent LO/Rf Isolation
- Multi-Octave Performance
- Excellent Intercept Point
- Miniature Size
- Connectors Per MIL-C-39012

Electrical Specifications

Frequency GHz	Isolation LO-RF dB Min/Typ	Convers. Loss dB Max/Typ	VSWR, RF Typ : 1
1.4 - 4.0	38/55	9.0/7.0	3
IF Freq. ¹ MHz	RF Power ² Input dBm	LO Power dBm Nominal	
DC-1000	+10	+18	

Notes: Impedance: 50 ohms nominal. Meets MIL-E-5400 Class 3 requirements. Additional screening available for military and space applications. 1) Upper IF frequency is the -3 dB response point. 2) At 1dB Compression point **Electrical and Mechanical Specifications subject to change without notice.**

Outline Drawing

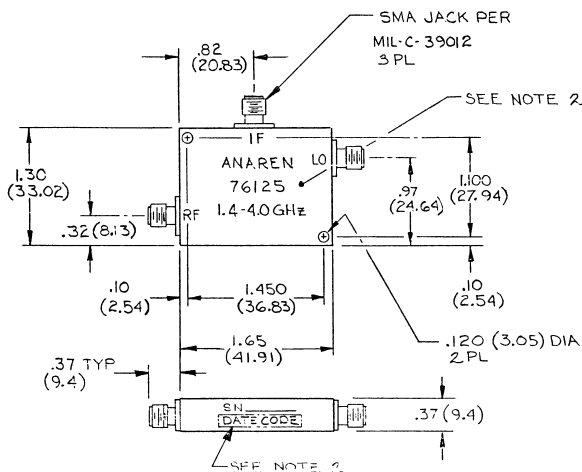

NOTES:

- 1 Finish: Epoxy Primer (A160-16123-G001)
Blue Epoxy Paint (A160-16221-G001)
- 2 Marking: Marking shall be in accordance with MIL-STD-130
- 3 Dimensions: Inches and (millimeters)