


## Quad Video Amplifier

### DEVICE DESCRIPTION

The ZXFV201 is a quad high speed amplifier designed for video and other high speed applications.

It features low differential gain and phase performance. High output drive capability compliments this part for use in video applications.

### CONNECTION DIAGRAM

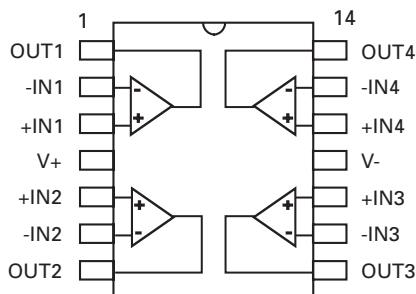

### FEATURES AND BENEFITS

- -3dB bandwidth 300MHz
- Slew rate 400V/μs
- Differential gain 0.01%
- Differential phase 0.01°
- Output current 40mA
- Characterised up to 400pF load
- ±5 Volt supply
- Supply current 7mA per amplifier.
- 14 pin SO package

### APPLICATIONS

- Video gain stages
- CCTV buffer
- Video distribution
- RGB buffering
- High frequency instrumentation
- Cable Driving
- Radar Imaging
- Medical Imaging

### ORDERING INFORMATION

| PART NUMBER  | CONTAINER | INCREMENT |
|--------------|-----------|-----------|
| ZXFV201N14TA | Reel 7"   | 500       |
| ZXFV201N14TC | Reel 13"  | 2500      |

## ABSOLUTE MAXIMUM RATINGS

|                              |                                      |
|------------------------------|--------------------------------------|
| Supply Voltage               | ±5.25V                               |
| Inputs to ground             |                                      |
| Outputs to ground            |                                      |
| Operating Temperature Range  | -40°C to 85°C Storage -65°C to 150°C |
| Continuous Power Dissipation | 650mW                                |
| Thermal resistance           | 120°C/W                              |

The power dissipation of the device including the loads must be designed to keep  $t_j$  below 150°C

## ELECTRICAL CHARACTERISTICS

Test Conditions:  $V_{cc}=\pm 5V$ ,  $T_{amb}= 25C$  unless otherwise stated.  $R_f = 1k\Omega$ ,  $R_L = 150\Omega$ ,  $C_L \leq 10pF$

| Parameter                              | Conditions                              | Test | Min.  | Typical    | Max.  | Units    |
|----------------------------------------|-----------------------------------------|------|-------|------------|-------|----------|
| Supply Voltage $V_+$                   |                                         |      | 4.75  | 5          | 5.25  | V        |
| Supply Voltage $V_-$                   |                                         |      | -5.25 | -5         | -4.75 | V        |
|                                        |                                         |      |       |            |       |          |
| Supply current                         |                                         | P    |       | 28         |       | mA       |
|                                        |                                         |      |       |            |       |          |
| Input Common mode Voltage              |                                         | P    |       | ±3.2       |       | V        |
| Input offset voltage                   |                                         | P    |       | ±2         |       | mV       |
| Input bias current non inverting input |                                         | P    |       |            |       | μA<br>μA |
| Input Resistance                       |                                         | P    | 3     |            | 7     | MΩ       |
| Output voltage swing                   |                                         | P    |       | ±3.5       |       | V        |
| Output drive current                   |                                         | P    |       |            | 40    | mA       |
|                                        |                                         |      |       |            |       |          |
|                                        |                                         |      |       |            |       |          |
| Positive PSRR                          |                                         |      |       | -48        |       | dB       |
| Negative PSRR                          |                                         |      |       | -48        |       | dB       |
| Bandwidth                              | $A_v = +1$                              | C    |       | 300        |       | MHz      |
| Slew rate                              | $A_v = +1$<br>$A_v = +2$<br>$A_v = +10$ |      |       | 400<br>400 |       | V/μs     |
| Rise time                              | $V_{out} = \pm 1V$ , 10% - 90%          |      |       | 4.0        |       | ns       |
| Fall time                              | $V_{out} = \pm 1V$ , 10% - 90%          |      |       | 3.2        |       | ns       |
| Propagation delay                      | $V_{out} = \pm 2V$ , 50%                |      |       |            |       | ns       |
|                                        |                                         |      |       |            |       |          |
| Open loop gain                         |                                         |      |       | 56         |       | dB       |
| Differential Gain                      | $R_L = 150\Omega$                       |      |       | 0.01       |       | %        |
| Differential phase                     | $R_L = 150\Omega$                       |      |       | 0.01       |       | deg      |

**Test: P=Production tested, C= Characterised**