

6.2V LOW POWER PRECISION REFERENCE SOURCE

ZRT062

ISSUE 1 - OCTOBER 1995

DEVICE DESCRIPTION

The ZRT062 is a monolithic integrated circuit providing a precise stable reference voltage of 6.17V at 500 μ A.

The circuit features a knee current of 150 μ A and operation over a wide range of temperatures and currents.

The ZRT062 is available in a 3-pin metal can package for through hole applications as well as SOT223 and SO8 packages for surface mount applications. Each package option offers a trim facility whereby the output voltage can be adjusted as shown in Fig.1. This facility is used when compensating for system errors or setting the reference output to a particular value. When the trim facility is not used, the pin should be left open circuit.

FEATURES

- Trimmable output
- Excellent temperature stability
- Low output noise figure
- Available in two temperature ranges
- 1 and 2% initial voltage tolerance versions available
- No external stabilising capacitor required in most cases
- Low slope resistance
- TO18 package
- SOT223 and SO8 small outline packages

SCHEMATIC DIAGRAM

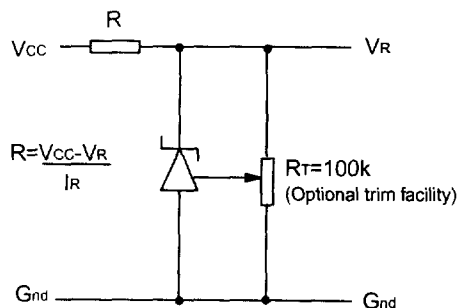


Figure 1:

This circuit will allow the reference to be trimmed over a wide range. The device is specified over a $\pm 5\%$ trim range.

CONNECTION TABLE

| Pin | SO8 | SOT223 | TO18 |
|------|----------|----------|----------|
| 1 | Trim | Trim | V_R |
| 2 | N/C | G_{nd} | Trim |
| 3 | N/C | V_R | G_{nd} |
| 4 | G_{nd} | - | - |
| 5 | N/C | - | - |
| 6 | N/C | - | - |
| 7 | N/C | - | - |
| 8 | V_R | - | - |
| Pack | N8 | G | - |

see Diagrams Page 1 - 8

ZRT062

ABSOLUTE MAXIMUM RATING

| | |
|-----------------------|------------------|
| Reverse Current | 50mA ϕ |
| Operating Temperature | |
| A grade | -55°C to 125°C |
| C grade | 0°C to 70°C |
| Storage Temperature | |
| TO18 | -55 °C to 175 °C |
| SO8, SOT223 | -55 °C to 125 °C |

Power Dissipation ($T_{amb}=25^{\circ}\text{C}$)

| | |
|---------------------------------------------------------------------------|-------|
| TO18 | 300mW |
| SO8 | 625mW |
| SOT223 | 2W |
| ϕ Above 25°C this figure should be linearly derated to 10mA at 125°C | |

TEMPERATURE DEPENDENT ELECTRICAL CHARACTERISTICS

| SYMBOL | PARAMETER | INITIAL VOLTAGE TOLERANCE % | GRADE A -55°C TO 125°C | | GRADE C 0°C TO 70°C | | UNITS |
|--------------|----------------------------------------------------------------------|--------------------------------------|---------------------------|------|------------------------|------|--------|
| | | | TYP | MAX | TYP | MAX | |
| ΔV_R | Output voltage change over relevant temperature range (See note (a)) | 1 & 2 | 15.0 | 40.0 | 6.5 | 22.0 | mV |
| $T_C V_R$ | Output voltage temperature coefficient (See note (b)) | 1 & 2 | 15.0 | 40.0 | 15.0 | 50.0 | ppm/°C |


ELECTRICAL CHARACTERISTICS

(at $T_{amb}=25^{\circ}\text{C}$ and Pin 2 o/c unless otherwise stated)

| SYMBOL | PARAMETER | MIN. | TYP. | MAX. | UNITS | COMMENTS |
|-----------------------|-------------------------------------------------------------|--------------|--------------|--------------|---------------|------------------------------------|
| V_R | Output voltage 1% tolerance (A1,C1) 2% tolerance (C2) | 6.11 6.05 | 6.17 6.17 | 6.23 6.29 | V | $I_R=500\mu\text{A}$ |
| ΔV_{TRIM} | Output voltage adjustment range | | ± 5 | | % | $R_T=100\text{k}\Omega$ |
| $T_C \Delta V_{TRIM}$ | Change in $T_C V_R$ with output adjustment | | 5.0 | | ppm/°C/% | |
| I_R | Operating current range | 0.15 | | 50 | mA | See note (c) |
| t_{on} t_{off} | Turn-on time Turn-off time | | 250 0.3 | | μs | $R_L=1\text{k}\Omega$ |
| e_{np-p} | Output voltage noise (over the range 0.1 to 10Hz) | | 50 | | μV | Peak to peak measurement |
| R_S | Slope resistance | | 1.4 | 3.0 | Ω | I_R 0.5mA to 5mA See note (d) |

ZRT062

TYPICAL CHARACTERISTICS

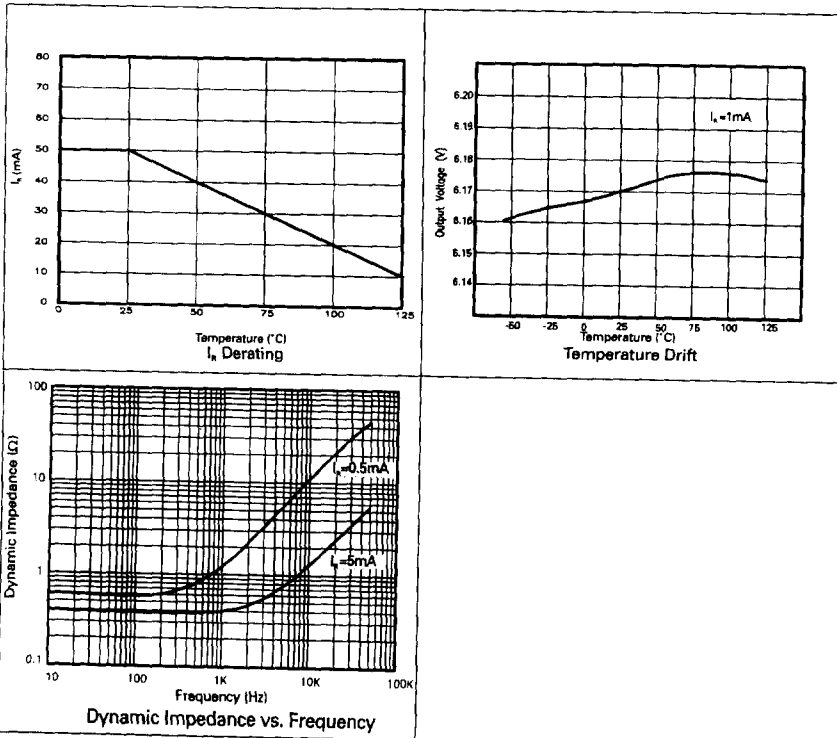

NOTES

(a) Output change with temperature (V_R)

The absolute maximum difference between the maximum output voltage and the minimum output voltage over the specified temperature range

$$\Delta V_R = V_{max} - V_{min}$$

(b) Output temperature coefficient ($T_C V_R$)

The ratio of the output change with temperature to the specified temperature range expressed in ppm/ $^{\circ}\text{C}$

$$T_C V_R = \frac{\Delta V_R \times 10^6}{V_R \times \Delta T} \text{ ppm}/^{\circ}\text{C}$$

ΔT = Full temperature range

(c) Operating current (I_R)

Maximum operating current must be derated as indicated in maximum ratings.

(d) Slope resistance (R_S)

The slope resistance is defined as :

$$R_S = \frac{\text{change in } V_R}{\text{specified current range}}$$

$$\Delta I = 5 - 0.5 = 4.5\text{mA (typically)}$$

(e) Line regulation

The ratio of change in output voltage to the change in input voltage producing it.

$$\frac{R_S \times 100}{V_R \times R_{source}} \% / V$$