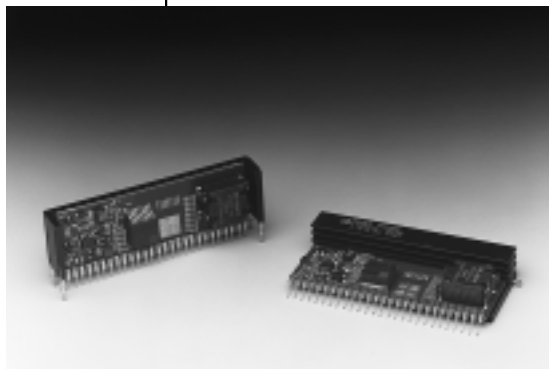
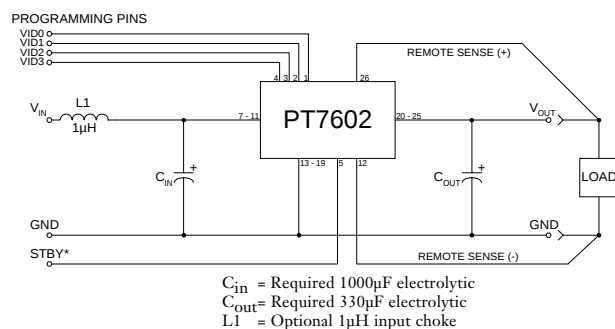


PT7602 Series**3.3V INPUT 10A PROGRAMMABLE
INTEGRATED SWITCHING REGULATOR****Revised 11/10/98**

The PT7602 is a new series of high-performance, 10A Integrated Switching Regulators (ISRs) housed in a 27-pin SIP package. The 10A capability allows easy integration of the latest high-speed, low-voltage μ Ps, DSPs, ASICs, and bus drivers into existing 3.3V systems.

The output voltage of the PT7602 can be easily programmed with a 4 bit input compatible with Intel's Pentium® II Processor. A differential remote sense is also provided which automatically compensates for any voltage drop from the ISR to the load.

Standard Application**Pin-Out Information**

Pin	Function	Pin	Function	Pin	Function
1	VID0	10	V_{in}	19	GND
2	VID1	11	V_{in}	20	V_{out}
3	VID2	12	Remote Sense Gnd	21	V_{out}
4	VID3	13	GND	22	V_{out}
5	STBY* - Stand-by	14	GND	23	V_{out}
6	Do not connect	15	GND	24	V_{out}
7	V_{in}	16	GND	25	V_{out}
8	V_{in}	17	GND	26	Remote Sense V_{out}
9	V_{in}	18	GND	27	Do not connect

For STBY* pin; open = output enabled; ground = output disabled.

Specifications

Characteristics ($T_a = 25^\circ\text{C}$ unless noted)	Symbols	Conditions	PT7602 SERIES			
			Min	Typ	Max	Units
Output Current	I_o	$T_a = +60^\circ\text{C}$, 200 LFM, pkg N $T_a = +25^\circ\text{C}$, natural convection	0.1* 0.1*	—	10 10	A A
Input Voltage Range	V_{in}	$0.1\text{A} \leq I_o \leq 10\text{A}$	3.1**	—	3.6	V
Output Voltage Tolerance	ΔV_o	$V_{in} = +3.3\text{V}$, $I_o = 10\text{A}$ $0^\circ\text{C} \leq T_a \leq +65^\circ\text{C}$	$V_o - 0.03$	—	$V_o + 0.03$	V
Line Regulation	Reg_{line}	$3.1\text{V} \leq V_{in} \leq 3.6\text{V}$, $I_o = 10\text{A}$	—	± 10	—	mV
Load Regulation	Reg_{load}	$V_{in} = +3.3\text{V}$, $0.1 \leq I_o \leq 10\text{A}$	—	± 10	—	mV
V_o Ripple/Noise	V_n	$V_{in} = +3.3\text{V}$, $I_o = 10\text{A}$	—	50	—	mV
Transient Response with $C_{out} = 330\mu\text{F}$	t_{tr} V_{os}	I_o step between 5A and 10A V_o over/undershoot	— —	100 200	— —	μSec mV
Efficiency	η	$V_{in} = +3.3\text{V}$, $I_o = 7\text{A}$	$V_o = 1.8\text{V}$ $V_o = 1.5\text{V}$	78 76	— —	% %
Switching Frequency	f_o	$3.1\text{V} \leq V_{in} \leq 3.6\text{V}$ $0.1\text{A} \leq I_o \leq 10\text{A}$	650	700	750	kHz
Absolute Maximum Operating Temperature Range	T_a	—	0	—	+85	$^\circ\text{C}$
Recommended Operating Temperature Range	T_a	Forced Air Flow = 200 LFM Over V_{in} and I_o Ranges	0	—	+65	$^\circ\text{C}$
Storage Temperature	T_s	—	-40	—	+125	$^\circ\text{C}$
Mechanical Shock		Per Mil-STD-883D, Method 2002.3 1 msec, Half Sine, mounted to a fixture	—	500	—	G's
Mechanical Vibration		Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, Soldered in a PC board	—	10	—	G's
Weight	—	Vertical/Horizontal	—	31/41	—	grams

* ISR will operate down to no load with reduced specifications. Please note that this product is not short-circuit protected.

** The minimum input voltage is 3.1V or $V_{out} + 1.2\text{V}$, whichever is greater.

Output Capacitors: The PT7602 series requires a minimum output capacitance of 330 μF for proper operation. Do not use Oscon type capacitors. The maximum allowable output capacitance is 7,500 μF .

Input Filter: An input filter is optional for most applications. The input inductor must be sized to handle 10ADC with a typical value of 1 μH . The input capacitance must be rated for a minimum of 1.0Arms of ripple current. For transient or dynamic load applications, additional capacitance may be required.

PT7602 Series**Features**

- +3.3V input
- 4-bit Programmable:
1.3V to 2.05V@10A
- High Efficiency
- Input Voltage Range:
3.1V to 3.6V
- Differential Remote Sense
- 27-pin SIP Package

Programming Information

VID3	VID2	VID1	VID0	Vout
1	1	1	1	1.30V
1	1	1	0	1.35V
1	1	0	1	1.40V
1	1	0	0	1.45V
1	0	1	1	1.50V
1	0	1	0	1.55V
1	0	0	1	1.60V
1	0	0	0	1.65V
0	1	1	1	1.70V
0	1	1	0	1.75V
0	1	0	1	1.80V
0	1	0	0	1.85V
0	0	1	1	1.90V
0	0	1	0	1.95V
0	0	0	1	2.00V

Logic 0 = Pin 12 potential (remote sense gnd)
 Logic 1 = Open circuit (no pull-up resistors)
 VID3 may not be changed while the unit is operating.

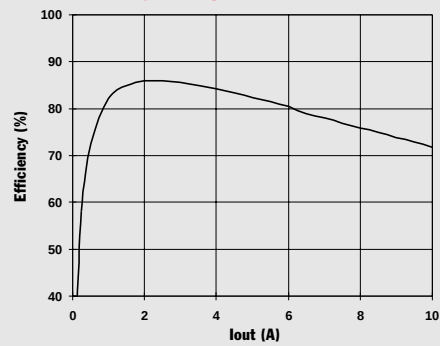
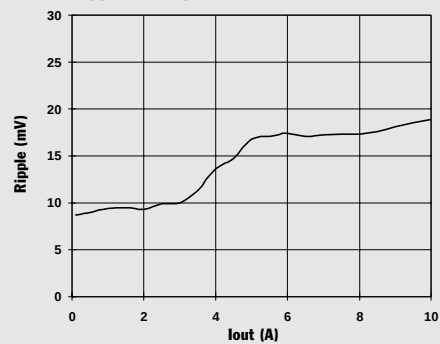
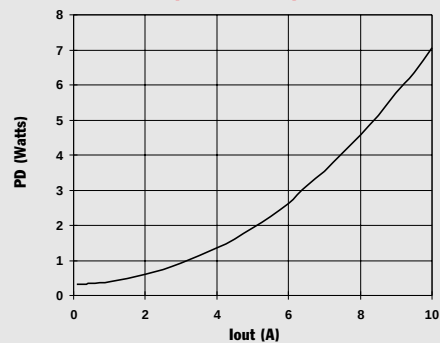
Ordering Information

PT7602□ = 1.3 to 2.05 Volts

(For dimensions and PC board layout,
 see Package Styles 800 and 810.)

PT Series Suffix (PT1234X)**Case/Pin Configuration**

Vertical Through-Hole	N
Horizontal Through-Hole	A
Horizontal Surface Mount	C

C H A R A C T E R I S T I C D A T A**PT7602, $V_o = 1.8$ VDC** (See Note 1)**Efficiency vs Output Current****Ripple vs Output Current****Power Dissipation vs Output Current**

Note 1: All data listed in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.