


ADSL LINE TRANSFORMER



- For use with TI's TNET D 4000 C/P chipset
- Excellent THD performance
- Small footprint
- Designed to meet UL 1950

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C

Part Number	Application	Mounting	Turns Ratio ($\pm 2\%$) (10-7):(1-4)	OCL @ 10 KHz, 0.1 V (1-4) with (2-3) shorted	Leakage Inductance @ 10 KHz, 0.1 V (1-4) with (10-7), shorted
B2132	CO	SMT	1:1.95 (Chip to Line)	1.5 mH ($\pm 10\%$)	12.0 μ H MAX

Additional Specifications


Part Number	DC Resistance (1-4)(w/2-3 shorted)	Isolation Voltage (Vrms)	Interwinding Capacitance @ 10 KHz, 0.1 V (1-10)
B2132	2.0 Ω MAX	1500	35 pF MAX

NOTE: Transformers are shipped in trays unless tape and reel is specified. Please add the suffix "T" (i.e. B2132T) for tape and reel orders.

Mechanical

Schematic

B2132

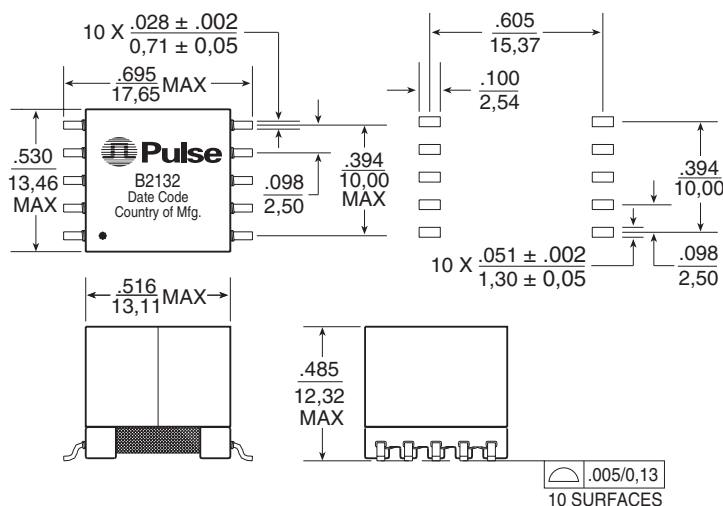

Weight6.2 grams
Tray60/tray

Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are $\pm .010$
 0.25

For More Information :

UNITED STATES (Worldwide)

12220 World Trade Drive
San Diego, CA 92128
Quick-Facts: 858 674 9672
<http://www.pulseeng.com>
TEL: 858 674 8100
FAX: 858 674 8262

UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road
The Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

FRANCE (Southern Europe)

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

SINGAPORE (Southern Asia)

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 287 8998
FAX: 65 280 0080

TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1
HsinTai Wu Road
Hsi-Chih, Taipei Hsien
Taiwan, R.O.C.
Tel: 886 2 2698 0228
FAX: 886 2 2698 0948

DISTRIBUTOR

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

♻️ Printed on recycled paper. ©2000, Pulse Engineering, Inc.

PRELIMINARY B954.P (1/00)