

PT7742—3.3V

20 Amp “Current Booster” for PT7708
Integrated Switching Regulator



SLTS085

(Revised 6/30/2000)

Description

The PT7742 is a 20 Amp “Current Booster” for the PT7708 housed in the same 27-pin SIP package.

Multiple PT7742 boosters will operate in parallel with one PT7708 product, boosting output current in increments of 20A. Combinations of a PT7708 regulator and PT7742 current boosters can supply power for virtually any multiple mega-processor application.

A PT7742 current booster adds a

parallel output stage that is driven directly by the regulator. This allows the system to run in perfect synchronization to provide a low noise solution.

The PT7742 only operates in combination with a PT7708 series regulator, and is not a stand-alone product. Please refer to the PT7708 data sheet for the performance specifications.

The booster uses the same 27-pin case and has the same package options as its companion regulator.

Features

- 20A Current Boost
- Tracks V_o of a PT7708
- High Efficiency
- Input Voltage Range: 3.1V to 3.6V
- Synchronized with PT7708
- 27-pin SIP Package
- Connect up to 2 in Parallel for 60 Amps

Pin-Out Information

Pin	Function	Pin	Function
1	Do not connect	14	GND
2	Do not connect	15	GND
3	Do not connect	16	GND
4	Do not connect	17	GND
5	Do not connect	18	GND
6	Do not connect	19	GND
7	V_{in}	20	V_{out}
8	V_{in}	21	V_{out}
9	V_{in}	22	V_{out}
10	V_{in}	23	V_{out}
11	V_{in}	24	V_{out}
12	Do not connect	25	V_{out}
13	GND	26	Do not connect
		27	Master Sync In

Ordering Information

PT7742□


(For dimensions and PC Board layout, see Package Styles 800 and 810.)

PT Series Suffix (PT1234X)

Case/Pin Configuration

Vertical Through-Hole	N
Horizontal Through-Hole	A
Horizontal Surface Mount	C

Standard Application

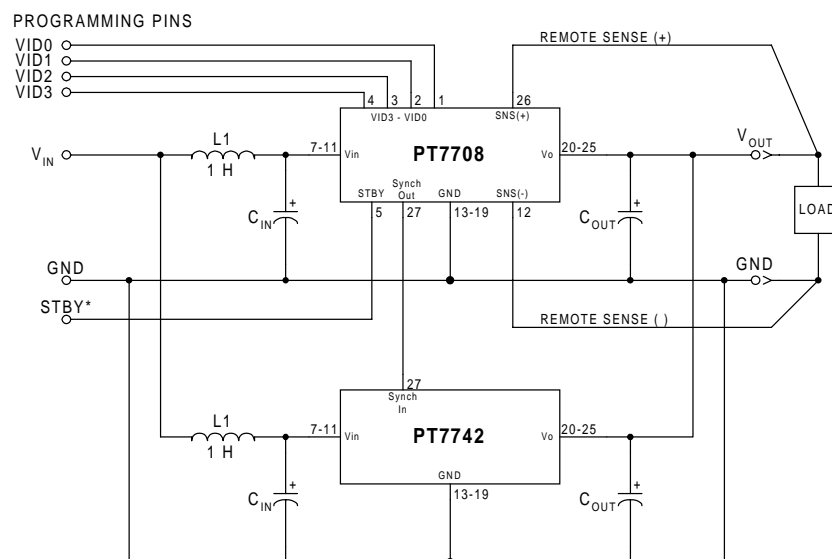

External Capacitors: The PT7742 requires a minimum output capacitance of 330µF for proper operation. The PT7742 also requires an input capacitance of 1500µF, which must be rated for a minimum of 1.4Arms of ripple current. For transient or dynamic load applications additional capacitance may be required. For more information refer to the application note regarding capacitor selection for this product.

Input Filter: An input filter inductor is optional for most applications. The inductor must be sized to handle 20ADC with a typical value of 1µH.

Capacitor Recommendations for the PT7708/09 Regulators and PT7742/43 Current Boosters

Input Capacitors

The recommended input capacitance is determined by 1.4 ampere minimum ripple current rating and 1500 μ F minimum capacitance. Capacitors listed below must be rated for a minimum of 2x the input voltage with +5V operation. Ripple current and $\leq 100\text{m}\Omega$ Equivalent Series Resistance (ESR) values are the major considerations along with temperature when selecting the proper capacitor.

Output Capacitors

The minimum required output capacitance is 330 μ F with a maximum ESR less than or equal to 100m Ω . Failure to observe this requirement may lead to regulator instability or oscillation. Electrolytic capacitors have poor ripple performance at frequencies greater than 400kHz, but excellent low frequency transient response. Above the ripple frequency ceramic decoupling capacitors are necessary to improve the transient response and reduce any microprocessor high frequency noise components apparent during higher current excursions. Preferred low ESR type capacitor part numbers are identified in the Table 1 below.

Tantalum Characteristics

Tantalum capacitors with a minimum 10V rating are recommended on the output bus, but only the AVX TPS Series, Sprague 594/595 Series, or Kemet T495/T510 Series. The AVX TPS Series, Sprague Series or Kemet Series capacitors are specified over other types due to their higher surge current, excellent power dissipation and ripple current ratings. As an example, the TAJ Series by AVX is not recommended. This series exhibits considerably higher ESR, reduced power dissipation and lower ripple current capability. The TAJ Series is a less reliable compared to the TPS series when determining power dissipation capability.

Capacitor Table

Table 1 identifies the characteristics of capacitors from a number of vendors with acceptable ESR and ripple current (rms) ratings. The suggested minimum quantities per regulator for both the input and output buses are identified.

This is not an extensive capacitor list. The table below is a selection guide for input and output capacitors. Other capacitor vendors are available with comparable RMS ripple current rating and ESR (Equivalent Series Resistance at 100kHz). These critical parameters are necessary to insure both optimum regulator performance and long capacitor life.

Table 1 Capacitors Characteristic Data

Capacitor Vendor/ Series	Capacitor Characteristics					Quantity		Vendor Number
	Working Voltage	Value(μ F)	(ESR) Equivalent Series Resistance	105°C Maximum Ripple Current(Irms)	Physical Size(mm)	Input Bus	Output Bus	
Panasonic FC Surface Mtg FA	16V	2200	0.038 Ω	2000mA	18x16.5	1	1	EEVFC1C222N
	35V	330	0.065 Ω	1205mA	12.5x16.5		1	EEVFC1V331LQ
	10V	680	0.090 Ω	755mA	10x12.5		1	EEUFA1A681
	16V	1800	0.032 Ω	2000mA	18x15	1	1	EEUFA1C182A
United Chemi -Con LFX Series	25V	330	0.084 Ω	825mA	10x16		1	LXV25VB331M10X16LL
	16V	2200	0.038 Ω	1630mA	16x20	1	1	LXV16VB222M16X20LL
	16V	470	0.084 $\Omega/2=0.42\Omega$	825mA x2	10x16		1	LXV16VB471M10X16LL
Nichicon PL Series PM Series	10V	680	0.090 Ω	770mA	10x15		1	UPL1A681MHH6
	10V	1800	0.044 Ω	1420mA	16x15	1	1	UPL1A182MHH6
	25V	330	0.095 Ω	750mA	10x15		1	UPL1E331MPH6
Oscon SS SV	10V	330	0.025W/4=0.006 Ω	>9800mA	10x10.5	4	N/R	10SS330M
	10V	330	0.020/4=0.005 Ω	>9800mA	10.3x12.6	4	(Note)	10SV330M(Sufvace Mtg)
AVX Tanatulum TPS- Series	10V	330	0.100/5=20 Ω	3500mA	7.3Lx	5	1	TPSV337M010R0100
	10V	330	0.060 Ω	1826mA	4.3Wx 4.1H	5	1	TPSV337M010R0060
Sprague Tantalum 595D/594D	10V	330	0.045W/4=0.011 Ω	>4500mA	7.3L x 5.7W x 4.0H	5	1	594D337X0010R2T
	10V	680	0.090 Ω	>1660mA		2	1	Surface Mount 595D687X0010R2T
Kemet Tantalum T510/T495 Series	10V	330	0.035 Ω	2000mA	4.3Wx7.3L x4.0H	5	1	510X337M010AS
	10V	220	0.070 $\Omega/2=0.035\Omega$	>2000mA		6	2	T495X227M010AS Surface Mount
Sanyo Poscap TPB	10V	220	0.040 Ω	3000mA	7.2L x 4.3W x 3.1H	6	2	10TPB220M Surface Mount

Note: (N/R) is not recommended for this application, due to extremely low Equivalent Series Resistance (ESR)

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.