

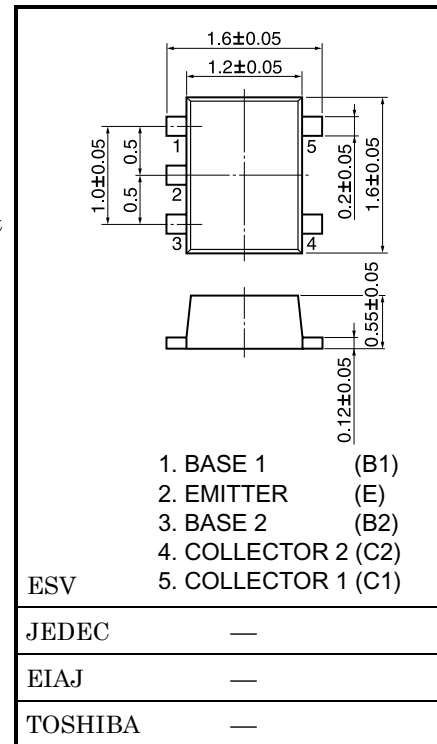
TOSHIBA Transistor Silicon NPN Epitaxial Type (PCT process) (Bias Resistor built-in Transistor)

## RN1701JE, RN1702JE, RN1703JE RN1704JE, RN1705JE, RN1706JE


Switching, Inverter Circuit, Interface Circuit and  
Driver Circuit Applications.

Unit in mm

- Two devices are incorporated into an Extreme-Super-Mini (5 pin) package.
- Incorporating a bias resistor into a transistor reduces parts count. Reducing the parts count enable the manufacture of ever more compact equipment and save assembly cost.
- Wide range of resistor values are available to use in various circuit designs.
- Complementary to RN2701JE~2706JE



### Equivalent Circuit and Bias Resistor Values




Type No.	R1 (kΩ)	R2 (kΩ)
RN1701JE	4.7	4.7
RN1702JE	10	10
RN1703JE	22	22
RN1704JE	47	47
RN1705JE	2.2	47
RN1706JE	4.7	47

### Maximum Ratings (Ta = 25°C) (Q1, Q2 common)

Characteristics	Symbol	Rating	Unit
Collector-base voltage	$V_{CBO}$	50	V
Collector-emitter voltage	$V_{CEO}$	50	V
Emitter-base voltage	$V_{EBO}$	10	V
		5	V
Collector current	$I_C$	100	mA
Collector power dissipation	$P_C$ (Note)	100	mW
Junction temperature	$T_j$	150	°C
Storage temperature range	$T_{stg}$	-55~150	°C

Note: Total rating

### Equivalent Circuit (top view)



000707EAA2







- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.

## Electrical Characteristics (Ta = 25°C) (Q1, Q2 common)

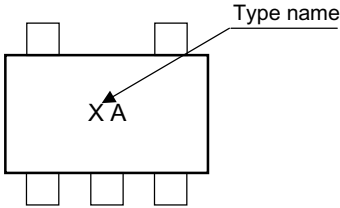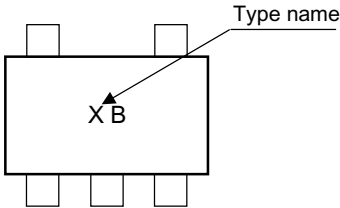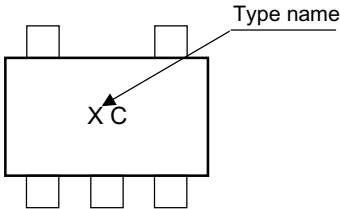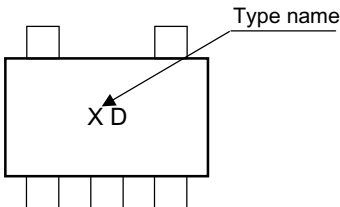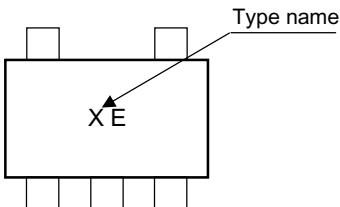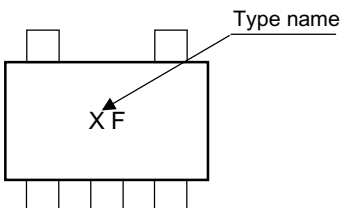Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current	RN1701JE~1706JE	$I_{CBO}$	$V_{CB} = 50\text{ V}, I_E = 0$	—	—	100	nA
		$I_{CEO}$	$V_{CE} = 50\text{ V}, I_B = 0$	—	—	500	
Emitter cut-off current	RN1701JE	$I_{EBO}$	$V_{EB} = 10\text{ V}, I_C = 0$	0.82	—	1.52	mA
	RN1702JE			0.38	—	0.71	
	RN1703JE			0.17	—	0.33	
	RN1704JE			0.082	—	0.15	
	RN1705JE	$I_{EBO}$	$V_{EB} = 5\text{ V}, I_C = 0$	0.078	—	0.145	
	RN1706JE			0.074	—	0.138	
DC current gain	RN1701JE	$h_{FE}$	$V_{CE} = 5\text{ V}, I_C = 10\text{ mA}$	30	—	—	
	RN1702JE			50	—	—	
	RN1703JE			70	—	—	
	RN1704JE			80	—	—	
	RN1705JE			80	—	—	
	RN1706JE			80	—	—	
Collector-emitter saturation voltage	RN1701JE~1706JE	$V_{CE(sat)}$	$I_C = 5\text{ mA}, I_B = 0.25\text{ mA}$	—	0.1	0.3	V
Input voltage (ON)	RN1701JE	$V_{I(ON)}$	$V_{CE} = 0.2\text{ V}, I_C = 5\text{ mA}$	1.1	—	2.0	V
	RN1702JE			1.2	—	2.4	
	RN1703JE			1.3	—	3.0	
	RN1704JE			1.5	—	5.0	
	RN1705JE			0.6	—	1.1	
	RN1706JE			0.7	—	1.3	
Input voltage (OFF)	RN1701JE~1704JE	$V_{I(OFF)}$	$V_{CE} = 5\text{ V}, I_C = 0.1\text{ mA}$	1.0	—	1.5	V
	RN1705JE, 1706JE			0.5	—	0.8	
Transition frequency	RN1701JE~1706JE	$f_T$	$V_{CE} = 10\text{ V}, I_C = 5\text{ mA}$	—	250	—	MHz
Collector output capacitance	RN1701JE~1706JE	$C_{ob}$	$V_{CB} = 10\text{ V}, I_E = 0, f = 1\text{ MHz}$	—	3	6	pF
Input resistor	RN1701JE	R1	—	3.29	4.7	6.11	kΩ
	RN1702JE			7	10	13	
	RN1703JE			15.4	22	28.6	
	RN1704JE			32.9	47	61.1	
	RN1705JE			1.54	2.2	2.86	
	RN1706JE			3.29	4.7	6.11	
Resistor ratio	RN1701JE~1704JE	R1/R2	—	0.9	1.0	1.1	
	RN1705JE			0.0421	0.0468	0.0515	
	RN1706JE			0.09	0.1	0.11	

000707EAA2

- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

Type Name	Marking
RN1701JE	 A diagram of a rectangular component with four pins on each of the longer sides. An arrow points from the text 'Type name' to the top-right corner. Inside the rectangle, the marking 'XA' is shown with an arrow pointing to it.
RN1702JE	 A diagram of a rectangular component with four pins on each of the longer sides. An arrow points from the text 'Type name' to the top-right corner. Inside the rectangle, the marking 'XB' is shown with an arrow pointing to it.
RN1703JE	 A diagram of a rectangular component with four pins on each of the longer sides. An arrow points from the text 'Type name' to the top-right corner. Inside the rectangle, the marking 'XC' is shown with an arrow pointing to it.
RN1704JE	 A diagram of a rectangular component with four pins on each of the longer sides. An arrow points from the text 'Type name' to the top-right corner. Inside the rectangle, the marking 'XD' is shown with an arrow pointing to it.
RN1705JE	 A diagram of a rectangular component with four pins on each of the longer sides. An arrow points from the text 'Type name' to the top-right corner. Inside the rectangle, the marking 'XE' is shown with an arrow pointing to it.
RN1706JE	 A diagram of a rectangular component with four pins on each of the longer sides. An arrow points from the text 'Type name' to the top-right corner. Inside the rectangle, the marking 'XF' is shown with an arrow pointing to it.