


Photo IC for rangefinder

NEW

S8030, S8064

Photo IC designed for near/far distance detection

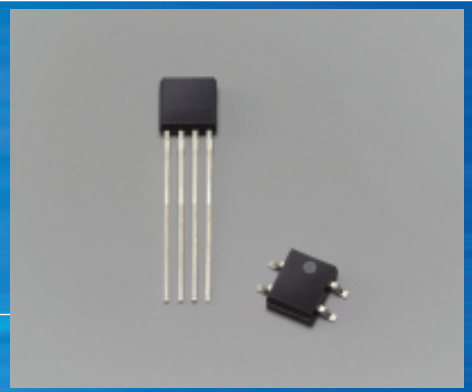

S8030 and S8064 are light modulation photo ICs consisting of a dual photodiode and a control/processing circuit. When used with an infrared LED and light emitting/receiving lenses, these photo ICs detect the distance (near or far) to an object at a certain measurement cycle by utilizing the optical triangular distance measurement.

Features

- Detects distance (near/far) to object
- Photodiode, LED drive circuit and signal processing circuit are all integrated.
- Open collector output
- Visible light cut package impervious to disturbance background light
- Subminiature plastic package

Applications

- Optical switch

■ Absolute maximum ratings (Ta=25 °C)

Parameter	Symbol	S8030	S8064	Unit
Supply voltage	Vcc	-0.5 to +7.0		V
Output voltage	Vo	-0.5 to +7.0		V
Output current	Io	50		mA
LED terminal voltage	VLED	-0.5 to +7.0		V
LED terminal current	ILED	70		mA
Power dissipation	P	250 *		mW
Operating temperature	Topr	-20 to +70		°C
Storage temperature	Tstg	-30 to +80		°C
Soldering	-	230 °C, 5 s	230 °C, 5 s, at least 1.8 mm away from package surface	-


* Derate power dissipation at a rate of 3.3 mW/°C above Ta=25 °C

■ Electrical and optical characteristics (Ta=25 °C, Vcc=5 V, unless otherwise noted)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Peak sensitivity wavelength	λ_p		-	850	-	nm
Photo sensitivity	S	$\lambda=900$ nm	-	0.3	-	A/W
Operation supply voltage	Vcc		4.5	5	6	V
Current consumption	Icc		-	4	6	mA
High level LED output current	ILEDH	VLED=5 V	-	-	1	μ A
Low level LED output voltage	VLEDL	Sink 10 mA	-	0.2	0.4	V
Low level LED pulse width	Tw		4.6	7	10.5	μ s
LED pulse cycle	Tp		150	224	336	μ s
Threshold input difference current	ITH	No background light	2.5	5	10	nA
Allowable background light	Ex	"A" light source 500 lx or less between channels	3000	-	-	lx
High level output current	IOH	VOU=5 V	-	-	1	μ A
Low level output voltage	VoL	Sink 10 mA	-	0.2	0.4	V

Note) A bypass capacitor (0.1 μ F) should be connected between Vcc and GND at a position within 7 mm from the photo IC lead. Another capacitor (4.7 μ F) should also be connected nearby between Vcc and GND


■ Block diagram

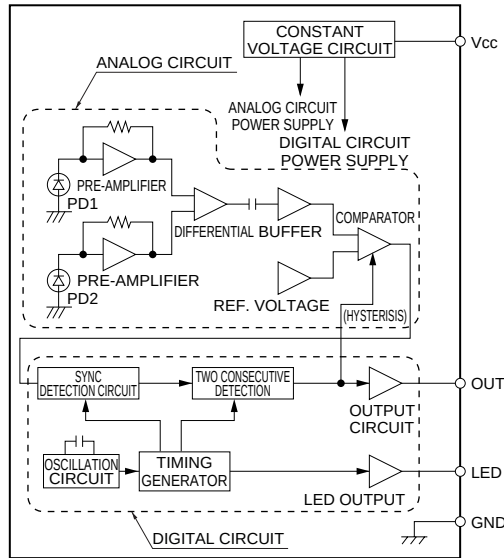

NOTE) TERMINAL AND POLARITY
LED: NPN open collector output is ON when LED is driven.
OUT: NPN open collector output is ON when near distance is detected.

KPIC0054EA


■ Timing chart: two consecutive measurements

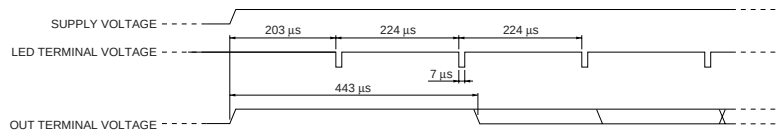

KPIC0055EB

■ Functions and optical systems


S8030 and S8064 photo ICs incorporate a dual photodiode (0.7×0.5 mm active area per channel) and a control/detection circuit. When used with an infrared LED and light emitting/receiving lenses, these photo ICs detect the distance (near or far) to an object based on a specified distance by utilizing the triangular distance measurement method. When making optical design, photodiode 2 of the dual photodiode in the rangefinder photo IC must be set closer to the infrared LED as shown below.

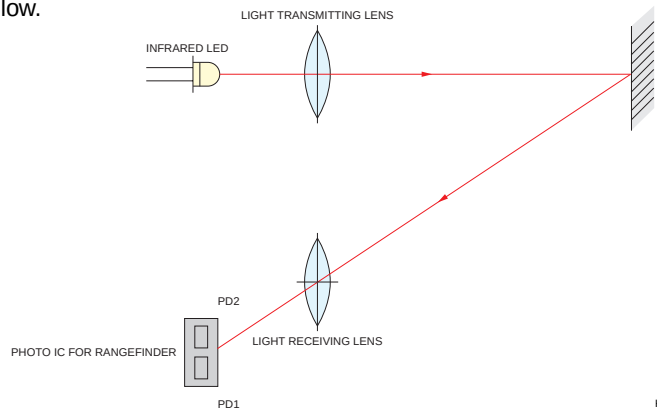

KPIC0065EA


■ Dimensional outline (unit: mm)

S8030

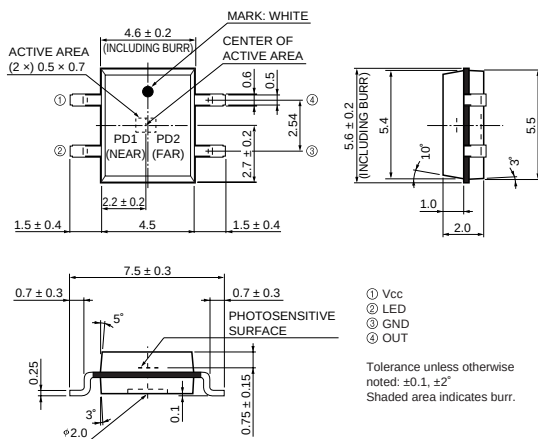

KPICA0030EA

S8064

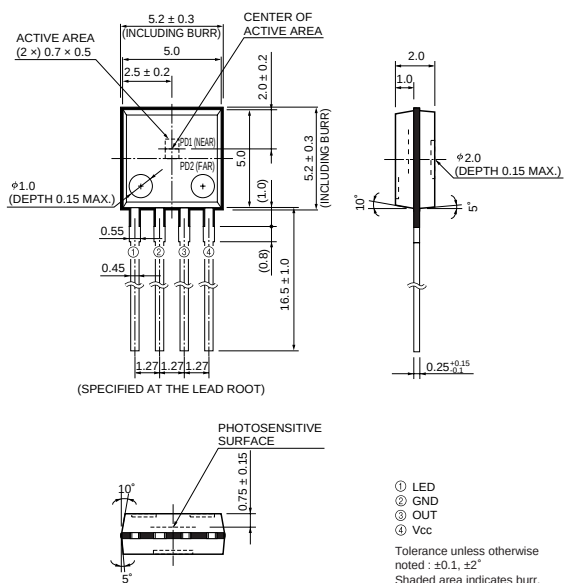

KPICA0037EA

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, <http://www.hamamatsu.com>

U.S.A.: Hamamatsu Corporation, 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2001 Hamamatsu Photonics K.K.