

***THIS DOCUMENT IS FOR MAINTENANCE
PURPOSES ONLY AND IS NOT
RECOMMENDED FOR NEW DESIGNS***

SL531

250MHz TRUE LOG IF AMPLIFIER

The SL531 C is a wide band amplifier designed for use in logarithmic IF amplifiers of the true log type. The input and output of a true log amplifier are at the same frequency i.e. detection does not occur. In successive detection log amplifiers (using SL521 SL1521 types) the log output is detected.

The small signal gain is 10dB and bandwidth is over 500MHz. At high signal levels the gain of a single stage drops. A cascade of such stages give a close approximation to a log characteristic at centre frequencies between 10 and 200MHz.

An important feature of the device is that the phase shift is nearly constant with signal level. Thus any phase information on the input signal is preserved through the strip.

The device is also available as the 5962-92084 which has guaranteed operation over the full Military Temperature Range and is screened to MIL-STD-883 Class B. Data is available separately

FEATURES

- Low Phase Shift vs Amplitude
- On-Chip Supply Decoupling
- Low External Components Count

APPLICATIONS

True Log Strips with:-

- Log Range 70dB
- Centre frequencies 10 - 200MHz
- Phase Shift ± 0.5 degrees / 10dB

ABSOLUTE MAXIMUM RATINGS (Non-simultaneous)

| | |
|---------------------------------------|---------------------|
| Supply voltage | +12 volts |
| Storage temperature range | -65°C to +150°C |
| Operating temperature range | -55°C to +125°C |
| | See operating notes |
| Max junction temperature | 175°C |
| Junction - ambient thermal resistance | 220°C/Watt |
| Junction - case thermal resistance | 80°C/Watt |

CIRCUIT DESCRIPTION

The SL531 transfer characteristic has two regions. For small input signals it has a nominal gain of 10 dB. At large signals the gain falls to unity (see Fig 7). This is achieved by operating a limiting amplifier and a unity gain amplifier in parallel (see Fig 3). Tr1 and Tr4 comprise the long tailed pair limiting amplifier, the tail current being supplied by Tr5, see Fig 2. Tr2 and Tr3 form the unity gain amplifier, the gain of which is defined by the emitter resistors. The outputs of both stages are summed in the 300 ohm resistor and Tr7 acts as an emitter follower output buffer. Important features are the amplitude and phase linearity of the unity gain stage which is achieved by the use of 5GHz transistors with carefully optimised geometries.

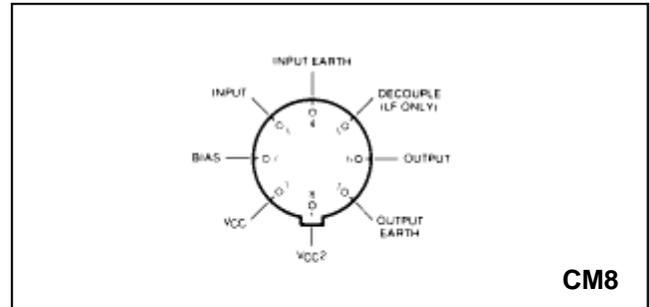


Fig. 1 Pin connections

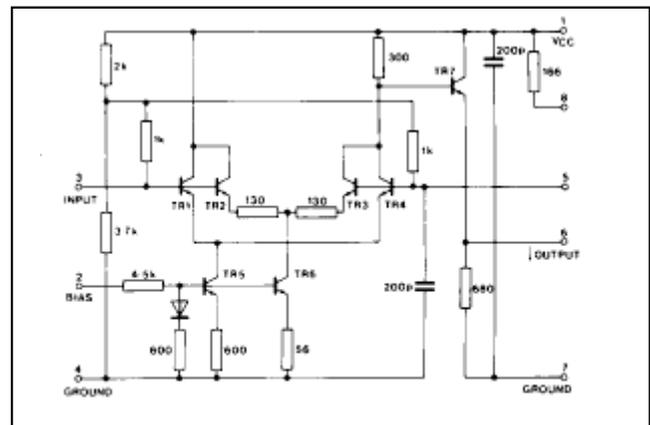


Fig. 2 Circuit diagram

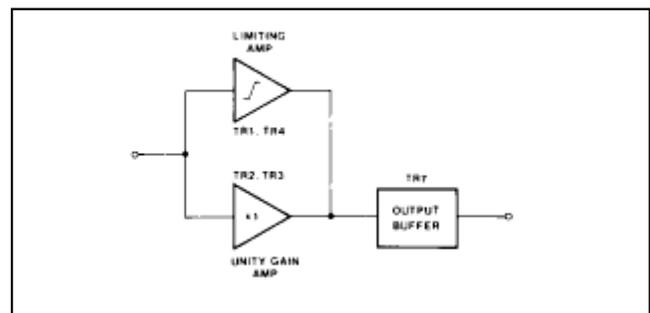


Fig. 3 Block diagram

ORDERING INFORMATION

5962-92084 (SMD)
SL531 C CM

SL531

ELECTRICAL CHARACTERISTICS

These characteristics are guaranteed over the following conditions (unless otherwise stated)

- Test circuit Fig (4)
- Frequency 60MHz
- Supply voltage 9 volts
- Ambient temperature 22±2°C

| Characteristic | Value | | | Units | Conditions |
|-----------------------------------|------------------------|------|------|---------|------------------------|
| | Min. | Typ. | Max. | | |
| Small signal voltage gain | 8 | 10 | 12 | dB | Vin = -30dBm |
| High level slope gain | -1 | 0 | +1 | dB | |
| Upper cut off frequency | 250 | 500 | | MHz | |
| Lower cut off frequency | | 3 | 10 | MHz | -3dB w.r.t. ± 60MHz |
| Supply current | | 17 | 25 | mA | |
| Phase change with input amplitude | | 1.1 | 3 | degrees | -Vin = 30dBm to +10dBm |
| Input impedance | 2.pF parallel with 1kΩ | | | | f = 10 - 200MHz |
| Output impedance | 15Ω series with 25nH | | | | |

OPERATING NOTES

1. Supply Voltage Options

An on chip resistor is provided which can be used to drop the supply voltage instead of the external 180 ohms shown in the test circuit. The extra dissipation in this resistor reduces the maximum ambient operating temperature to 100°C. It is also possible to use a 6 volt supply connected directly to pins 1 and 2 Problems with feedback on the supply line etc may occur in this connection and RF chokes may be required in the supply line between stages.

2. Layout P recautions

The internal decoupling capacitors help prevent high frequency instability however normal high frequency layout precautions are still necessary. Coupling capacitors should be physically small and be connected with short leads. It is most important that the ground connections are made with short leads to a continuous ground plane.

3. Low Frequency Response

The LF response is determined by the on chip capacitors. It can be extended by extra external decoupling on pins 5 and 1.

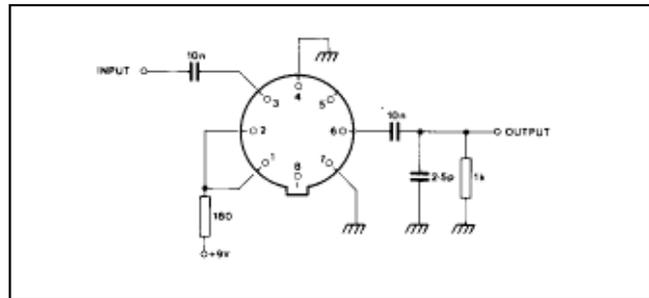


Fig.4 Test circuit

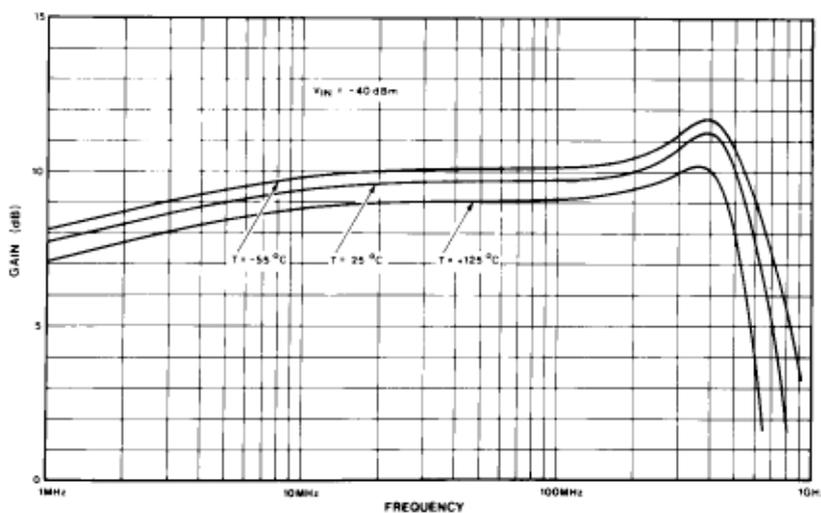


Fig.5 Small signal frequency response

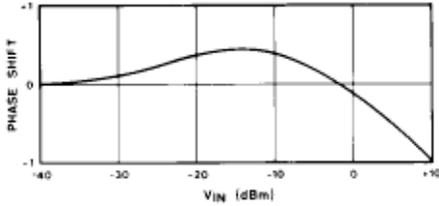


Fig.6 Phase v. input

TYPICAL APPLICATION—6 STAGE LOG STIP

- Input log range 0dBm to -70dBm
- Low level gain 60dB (-70dBm in)
- Output dynamic range 20dB
- Phase shift (over log range) $\pm 3^\circ$
- Frequency range 10—200MHz

The circuit shown in Fig 9 is designed to illustrate the use of the SL531 in a complete strip. The supply voltage is fed to each stage via an external 180Ω resistor to allow operation to 125°C ambient. If the ambient can be limited to +100°C then the internal resistor can be used to reduce the external component count. Interstage coupling is very simple with just a capacitor to isolate bias levels being necessary. No connection is necessary to pin 5 unless operation below 10MHz is required. It is important to provide extra decoupling on pin 1 of the first stage to prevent positive feedback occurring down the supply line. An SL560 is used as a unity gain buffer the output of the log strip being attenuated before the SL560 to give a nominal 0dBm output into 50Ω.

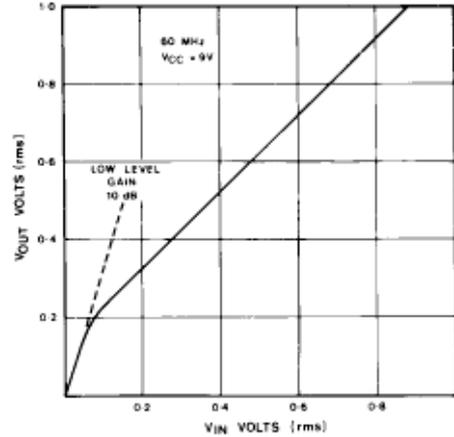


Fig.7 Transfer characteristics linear plot

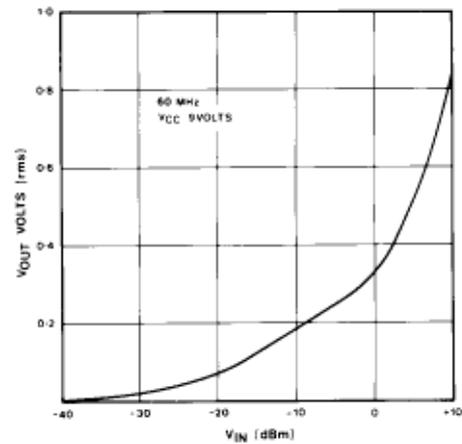


Fig.8 Transfer characteristics logarithmic input scale

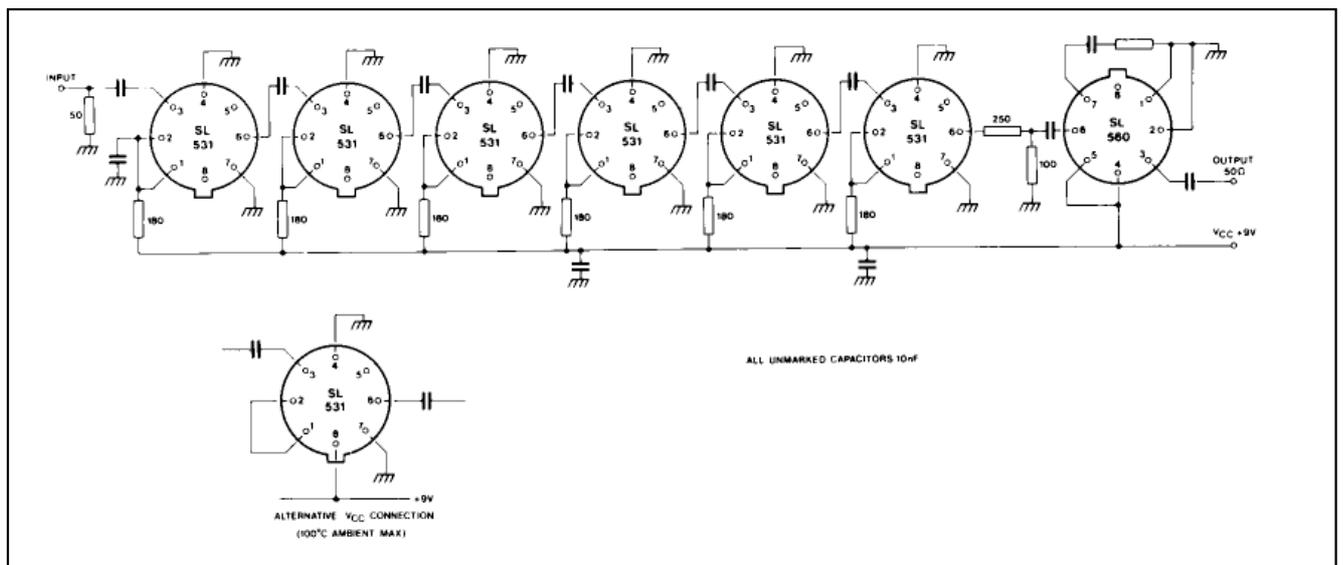


Fig.9 Circuit diagram 6 stage strip



<http://www.zarlink.com>

World Headquarters - Canada

Tel: +1 (613) 592 0200

Fax: +1 (613) 592 1010

North America - West Coast

Tel: (858) 675-3400

Fax: (858) 675-3450

North America - East Coast

Tel: (978) 322-4800

Fax: (978) 322-4888

Asia/Pacific

Tel: +65 333 6193

Fax: +65 333 6192

**Europe, Middle East,
and Africa (EMEA)**

Tel: +44 (0) 1793 518528

Fax: +44 (0) 1793 518581

Information relating to products and services furnished herein by Mitel Corporation trading as Zarlink Semiconductor or its subsidiaries (collectively Zarlink) is believed to be reliable. However, Zarlink assumes no liability for errors that may appear in this publication, or for liability otherwise arising from the application or use of any such information, product or service or for any infringement of patents or other intellectual property rights owned by third parties which may result from such application or use. Neither the supply of such information or purchase of product or service conveys any license, either express or implied, under patents or other intellectual property rights owned by Zarlink or licensed from third parties by Zarlink, whatsoever. Purchasers of products are also hereby notified that the use of product in certain ways or in combination with Zarlink, or non-Zarlink furnished goods or services may infringe patents or other intellectual property rights owned by Zarlink.

This publication is issued to provide information only and (unless agreed by Zarlink in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. The products, their specifications, services and other information appearing in this publication are subject to change by Zarlink without notice. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. Manufacturing does not necessarily include testing of all functions or parameters. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to Mitel Corporation's conditions of sale which are available on request.

Purchase of Zarlink's I²C components conveys a licence under the Philips I²C Patent rights to use these components in an I²C System, provided that the system conforms to the I²C Standard Specification as defined by Philips

Zarlink Semiconductor and the logo are trademarks of Mitel Corporation.
Copyright 2001, Mitel Corporation. All Rights Reserved.

Mitel, M Mitel and other "Mitel" licensed marks are owned by Mitel Networks Corporation and used under license.

TECHNICAL DOCUMENTATION - NOT FOR RESALE



**For more information about all Zarlink products
visit our Web Site at
www.zarlink.com**

Information relating to products and services furnished herein by Zarlink Semiconductor Inc. trading as Zarlink Semiconductor or its subsidiaries (collectively "Zarlink") is believed to be reliable. However, Zarlink assumes no liability for errors that may appear in this publication, or for liability otherwise arising from the application or use of any such information, product or service or for any infringement of patents or other intellectual property rights owned by third parties which may result from such application or use. Neither the supply of such information or purchase of product or service conveys any license, either express or implied, under patents or other intellectual property rights owned by Zarlink or licensed from third parties by Zarlink, whatsoever. Purchasers of products are also hereby notified that the use of product in certain ways or in combination with Zarlink, or non-Zarlink furnished goods or services may infringe patents or other intellectual property rights owned by Zarlink.

This publication is issued to provide information only and (unless agreed by Zarlink in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. The products, their specifications, services and other information appearing in this publication are subject to change by Zarlink without notice. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. Manufacturing does not necessarily include testing of all functions or parameters. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to Zarlink's conditions of sale which are available on request.

Purchase of Zarlink's I²C components conveys a licence under the Philips I²C Patent rights to use these components in and I²C System, provided that the system conforms to the I²C Standard Specification as defined by Philips.

Zarlink and the Zarlink Semiconductor logo are trademarks of Zarlink Semiconductor Inc.

Copyright 2001, Zarlink Semiconductor Inc. All Rights Reserved.

TECHNICAL DOCUMENTATION - NOT FOR RESALE
