

DC BLOCKS

BNC

10 MHz - 4 GHz

200 Volts



MODELS: 8080, 8081, 8082, 8083, 8084, 8085, 8086, 8087, 8088


SPECIFICATIONS:

Electrical:

Frequency Range _____ 10 MHz - 4 GHz
VSWR _____ 1.35:1 Max.
Impedance _____ 50 Ohms
Insertion Loss _____ 0.5 dB Max.
Voltage Rating _____ 200 Volts Max.
Operating Temp. Range _____ -65°C to +125°C

Mechanical:

BNC Connectors _____ Nickel Plated Brass
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper

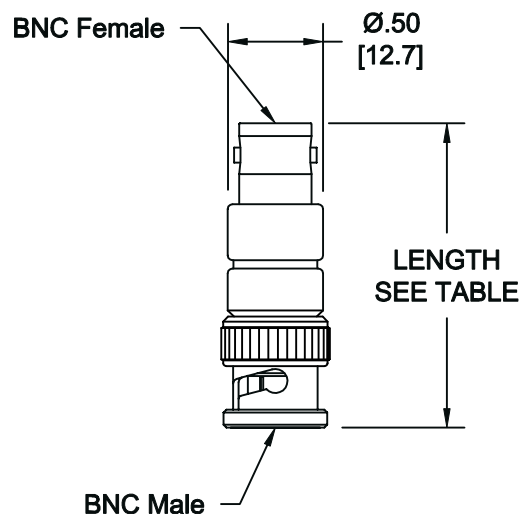

Model Shown: 8080

TABLE

MODEL NUMBER	BLOCK TYPE	CONN. CONFIG.	LENGTH
8080	INNER ONLY	MALE/ FEMALE	1.60 ±.04 [40.6 ±1.0]
8081	OUTER ONLY		
8082	INNER-OUTER		
8083	INNER ONLY	FEMALE/ FEMALE	1.49 ±.04 [37.7 ±1.0]
8084	OUTER ONLY		
8085	INNER-OUTER		
8086	INNER ONLY	MALE/ MALE	1.71 ±.03 [43.5 ±1.0]
8087	OUTER ONLY		
8088	INNER-OUTER		

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

8080; REV B