

DC BLOCK / TERMINATIONS

SMA

30 kHz - 18 GHz
INNER ONLY



MODELS: 8530-SMAM & 8530-SMAF

SPECIFICATIONS:


Electrical:

Frequency Range _____ 30 KHz - 18 GHz
VSWR _____ 1.35:1 Max.
Impedance _____ 50 Ohms
Voltage Rating _____ 100 Volts Max DC
Operating Temp. Range _____ +10°C to +85°C


Mechanical:

Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper

Model Number: **8530SM**
SMA Male Connector

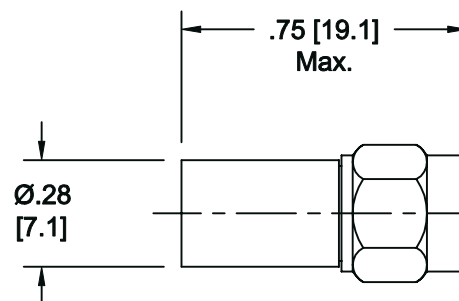

Model Number: **8530SF**
SMA Female Connector

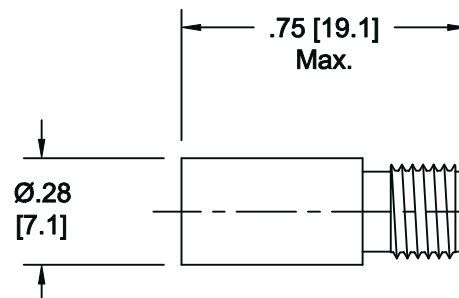

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

8530-SMA; REV C