



848F65T5E-SX

14.7 dBd
Directional Log Periodic Antenna


806-896 MHz

MaxFill™
dB Director®



- 806-896 MHz
- 14.7 dBd (16.8 dBi) Gain
- 5° Electrical Downtilt
- Vertical Polarization
- 65° Azimuth BW
- 9° Elevation BW
- 7/16 DIN
- Cellular, Trunking

65°

Azimuth
(Horizontal)

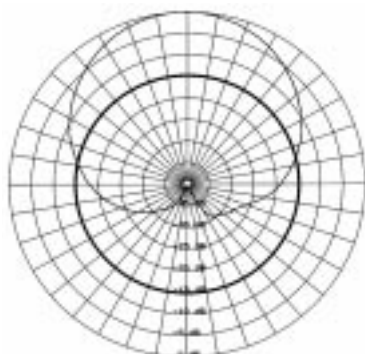

Elevation
(Vertical)

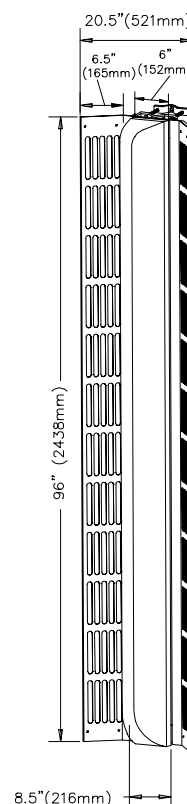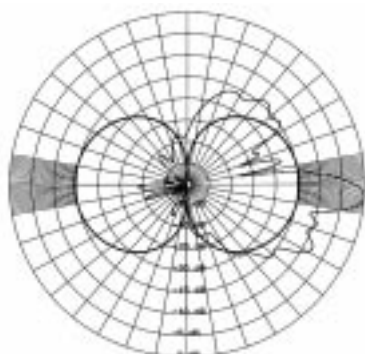

Electrical

VSWR: 1.5:1
Null Fill: 12 dB typical
USLS: 15 dB typical
Front-to-Back Ratio: 40 dB typical
Max. Input Power: 500 Watts
Lightning Protection: All metal parts are grounded.

Mechanical

Weight: 39 lbs (17.7 kg)
Wind Area: 13.7 ft² (1.27 m²)
Wind Load: 548 lbf (2438N) 246 kp (at 100 mph)
Max. Wind Speed: 125 mph (201 km/h)
Reflectors: Aluminum
Radiators: Brass
Back Panel: Passivated Aluminum
Radome: ABS, UV Stabilized
Mounting Hardware: Galvanized Steel
Color: Gray

Mounting Options

Standard: DB380-3 pipe mount kit, included.
Downtilt: DB5083D downtilt bracket, optional.

Shipping Information

Packing Size: 98" x 26" x 12" (249 x 66 x 30 cm)
Shipping Weight: 67 lbs (30.5 kg)

8635 Stemmons Freeway • Dallas, Texas U.S.A. 75247-3701

Dallas/Ft. Worth Area Tel: 214.631.0310 • Fax: 214.631.4706

Toll Free Tel: 1.800.676.5342 • Fax: 1.800.229.4706

www.decibelproducts.com
dbtech@decibelproducts.com



ISO9001 Compliant