

DC BLOCKS

2.4mm

7 kHz - 50 GHz

Inner Only



MODELS: 8535E, 8535EF & 8535EM

SPECIFICATIONS:

Electrical:

Frequency Range _____ 7 KHz - 50 GHz

VSWR:

*250 KHz - 18 GHz _____ 1.30:1 Max.

18 GHz - 32 GHz _____ 1.55:1 Max.

32 GHz - 50 GHz _____ 1.65:1 Max.

Impedance _____ 50 Ohms

Voltage Rating _____ 30 Volts Max.

Operating Temp Range _____ -35°C to +85°C

Typical Rise Time (90%) _____ 9 picoSeconds Max.

< -3 dB Bandwidth Typ. _____ <7 KHz - >50 GHz

Insertion Loss:

100 KHz - 12.4 GHz _____ 0.50 dB Max.

12.4 GHz - 32 GHz _____ 0.75 dB Max.

32 GHz - 50 GHz** _____ 1.25 dB Max.

Mechanical:


Materials _____ Gold Plated Beryllium Copper

*100 KHz - 250 KHz VSWR is Typically 1.40:1 Max.

**32 GHz - 50 GHz Insertion loss is Typically 1.0 dB Max. as goal.


Model Number: **8535E**

2.4mm Male / Female

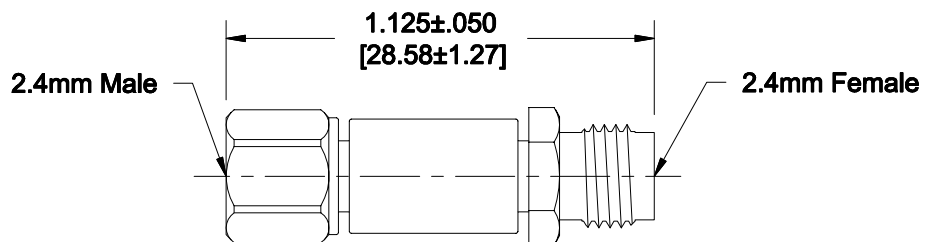


Model Number: **8535EF**

2.4mm Female / Female

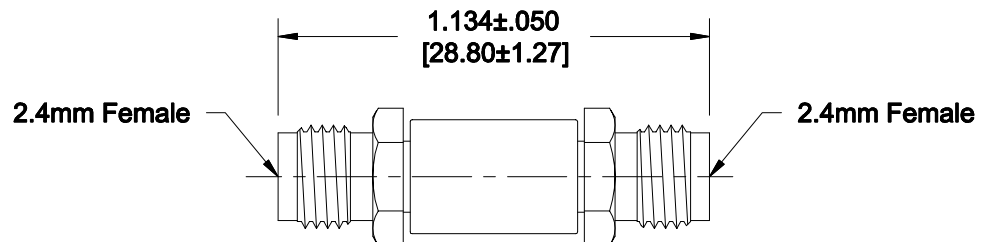

Model Number: **8535EM**

2.4mm Male / Male

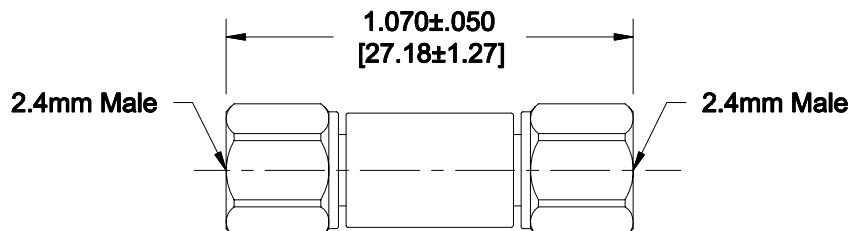

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Overall lengths are with coupling nuts biased forward (installed length)

8535E; REV B