

DC BLOCKS

2.9mm

10 MHz - 26.5 GHz

200 Volts



MODELS: 8060, 8061, 8062, 8063, 8064, 8065, 8066, 8067 & 8068

SPECIFICATIONS:

Electrical:

Frequency Range _____ 10 MHz - 26.5 GHz
VSWR _____ 1.35:1 Max.
Impedance _____ 50 Ohms
Insertion Loss _____ 0.5 dB Max.
Voltage Rating _____ 200 Volts Max.
Operating Temp. Range _____ -65°C to +125°C


Mechanical:

Connectors _____ Passivated Stainless Steel
(Mate both Mechanically & Electrically with
all SMA, K* & 3.5mm Series Connectors.)

Conductors _____ Gold Plated Beryllium Copper

Housings:

Inner Only Blocks _____ Passivated Stainless Steel
Outer and Inner/Outer Blocks _____ High Temperature Plastic

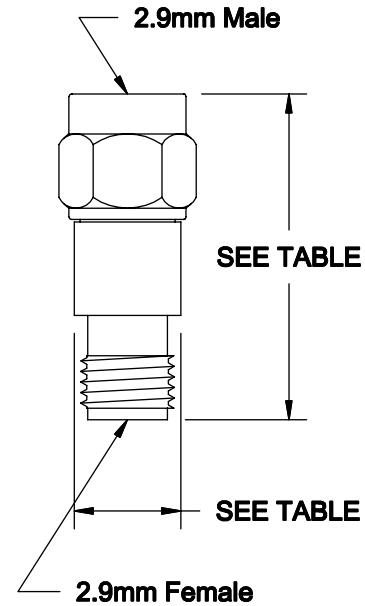

* K is a trademark of Wiltron Corp.

Model Shown 8060

TABLE						
MODEL NUMBER	BLOCK TYPE	CONN. CONFIG.	WEIGHT GRAMS MAX.	DIAMETER	OVERALL LENGTH	
					INCHES	MILLIMETERS
8060	INNER ONLY	MALE/ FEMALE	5.3	Ø.280 [7.11]	.855 ±.020	21.72 ±0.51
8061	OUTER ONLY		5.5	Ø.500 [12.7]	.860 ±.020	21.84 ±0.51
8062	INNER-OUTER					
8063	INNER ONLY	FEMALE/ FEMALE	7.2	Ø.280 [7.11]	.920 ±.015	23.37 ±0.38
8064	OUTER ONLY		6.2	Ø.500 [12.7]	.925 ±.015	23.50 ±0.38
8065	INNER-OUTER					
8066	INNER ONLY	MALE/ MALE	7.0	Ø.360 [9.14]	.965 ±.030	24.51 ±0.76
8067	OUTER ONLY		6.0	Ø.500 [12.7]	.970 ±.030	24.64 ±0.76
8068	INNER-OUTER					

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

8060; REV H