

DC BLOCKS, Between Series

BNC / SMA

10 MHz - 4 GHz
Inner Only



MODELS: 8313

SPECIFICATIONS:


Electrical:

Frequency Range _____ 10 MHz - 4 GHz
VSWR _____ 1.35:1 Max.
Impedance _____ 50 Ohms
Insertion Loss _____ 0.5 dB Max.
Voltage Rating _____ 100 Volts Max.
Operating Temp. Range _____ -65°C to +125°C

Mechanical:

SMA Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348
BNC Connectors _____ Nickel Plated Brass
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper

Model Number: 8313

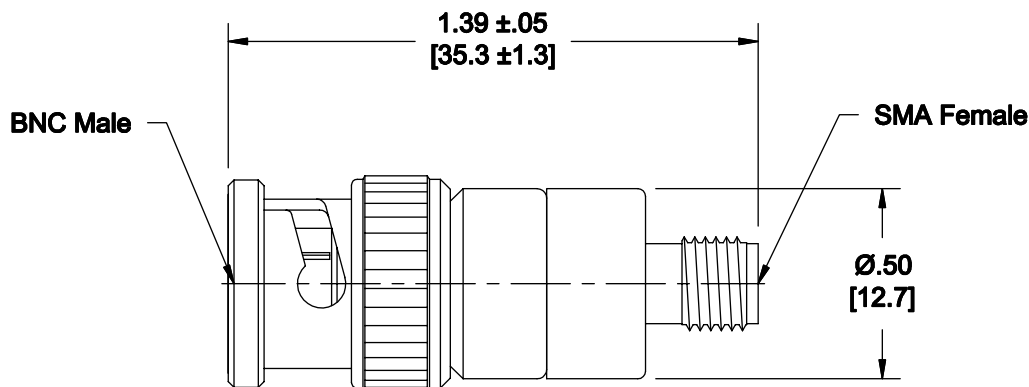

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

8313; REV -