



ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz): 2.000-3.000
 IMPEDANCE (NOMINAL): 50 OHMS
 VSWR: INPUT: 1.25:1 TYP/1.35:1 MAX
 OUTPUT: 1.10:1 TYP/1.20:1 MAX
 INSERTION LOSS (dB): 0.4 TYP/0.5 MAX
 AMPLITUDE BALANCE (MAX): 0.2 dB
 PHASE BALANCE (MAX): 4 DEGREES
 ISOLATION (dB): 25 TYP/22 MIN
 RF POWER (TOTAL MAX): 20 WATTS INPUT WITH LOAD
 VSWR 1.2:1 OR BETTER

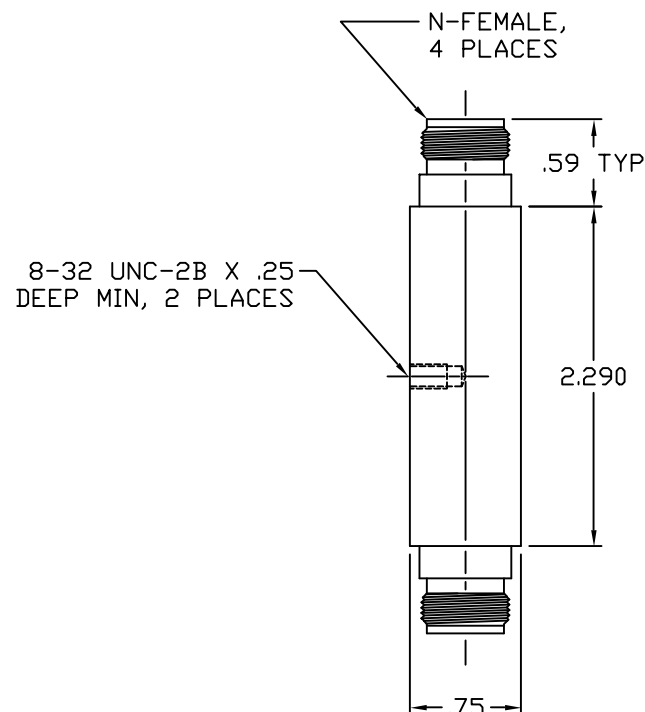

MECHANICAL SPECIFICATIONS

CONNECTORS: N-FEMALE, BRASS, NICKEL PLATE
 CONNECTOR PINS: BERYLLIUM COPPER, GOLD PLATE
 HOUSING: ALUMINUM, YELLOW IRIDITE
 INSULATORS: TEFLON®, VIRGIN ELECTRICAL GRADE
 O-RINGS: SILICONE RUBBER
 TEMPERATURE: -55°C TO +85°C

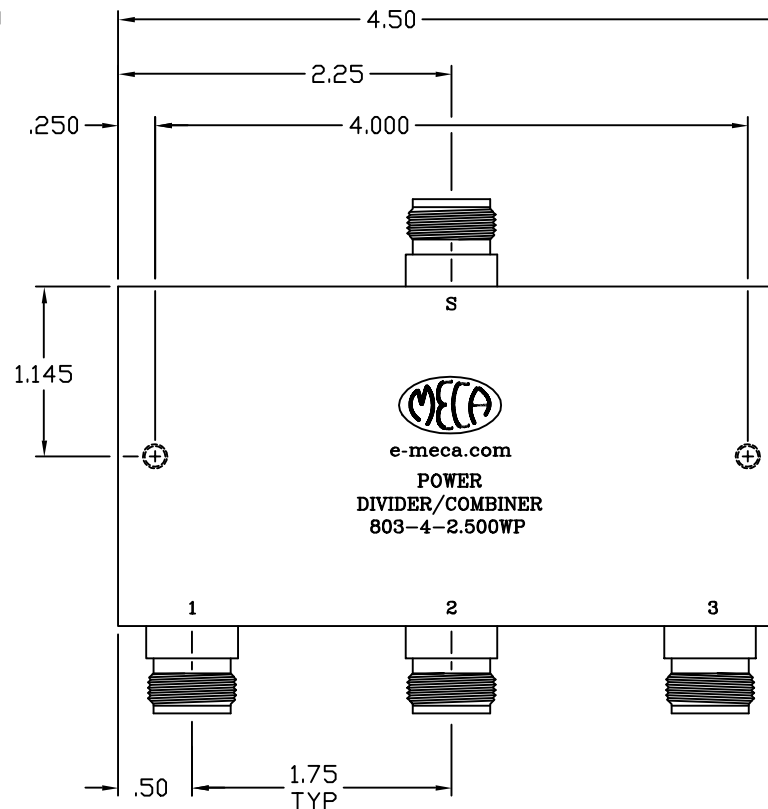

				MATERIAL: SEE ABOVE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES		 ELECTRONICS, INC. DENVER, NEW JERSEY e-meca.com	
				FINISH: SEE ABOVE		TOLERANCES 2 PLACES: ± .02 3 PLACES: ± .010 ANGLES: ± ---		TITLE 3-WAY, IN-PHASE (0 DEGREE), POWER DIVIDER/COMBINER, N-FEMALE, WEATHERPROOF	
				DRAWN: RWA	DATE: 10/26/01	TIR:			
				APPROVED: MJD	DATE: 10/26/01	SCALE: NTS	SIZE A	CODE IDENT. NO. 22424	DRAWING NO. 803-4-2.500WP
LTR	DESCRIPTION	DATE	APP			SHEET:			