


8706 Series

Edge Connector 3.96mm(0.156")

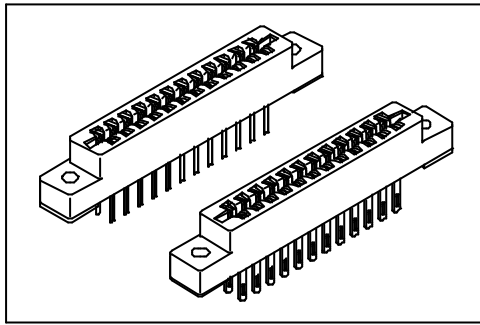

Material:

Housing: 30% Glass filled PBT UL94V-D.

Contacts: Phosphor Bronze.

Plating: Gold plated.

Electrical Characteristics:

Current Rating: 1 AMP.








Insulator Resistance: 5000MΩmin. at DC 500V.

Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: -55°C~+105°C

Features:

- * Accept 1.47mm~1.78mm(0.058"~0.070") thickness PC board.
- * Available in 12pin through 86pin.
- * Overstress protected contact design.

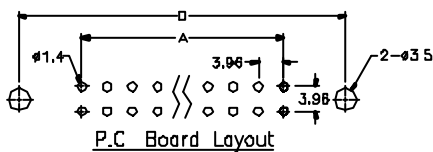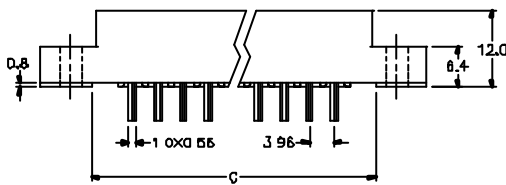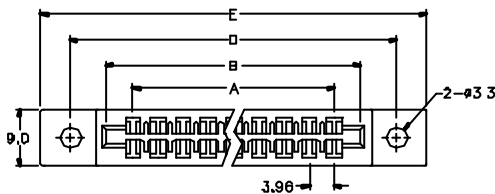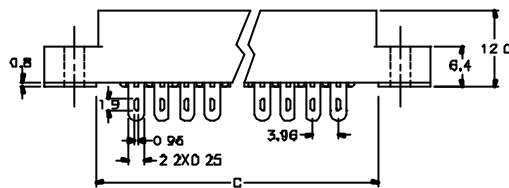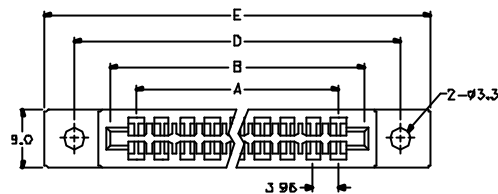

Position	Dimension				
	A	B	C	D	E
12	19.80	28.16	31.16	38.86	48.24
20	35.64	44.00	47.00	54.70	64.00
24	43.56	52.00	55.00	62.70	72.00
30	55.44	63.80	66.80	74.50	83.80
36	67.32	75.70	78.70	86.40	95.70
44	83.16	91.60	93.50	102.30	111.60
56	106.94	115.30	118.30	126.00	135.30
60	114.86	123.22	126.22	133.92	143.22
72	138.60	147.00	150.00	157.80	165.60
86	166.32	174.72	187.72	185.50	193.32

Ordering information

8706- 86 G D
 Series No. of Pin Count G: Gold Plated D: Dip Type
 S: Solder Type