







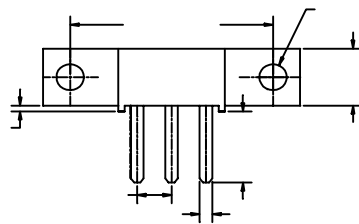
**TECHNICAL DATA
DATA SHEET****84CNQ035/84CNQ040/84CNQ045
SCHOTTKY RECTIFIER****Applications:**

- Switching power supply • Free-Wheeling diodes • Reverse battery protection • Converters

Features:

- 125°C T_J operation
- Center tap module
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Low profile, small footprint, high current package

Case Styles		
84CNQ...	84CNQ...SL	84CNQ...SM
		
D61-8	D61-8-SL	D61-8-SM

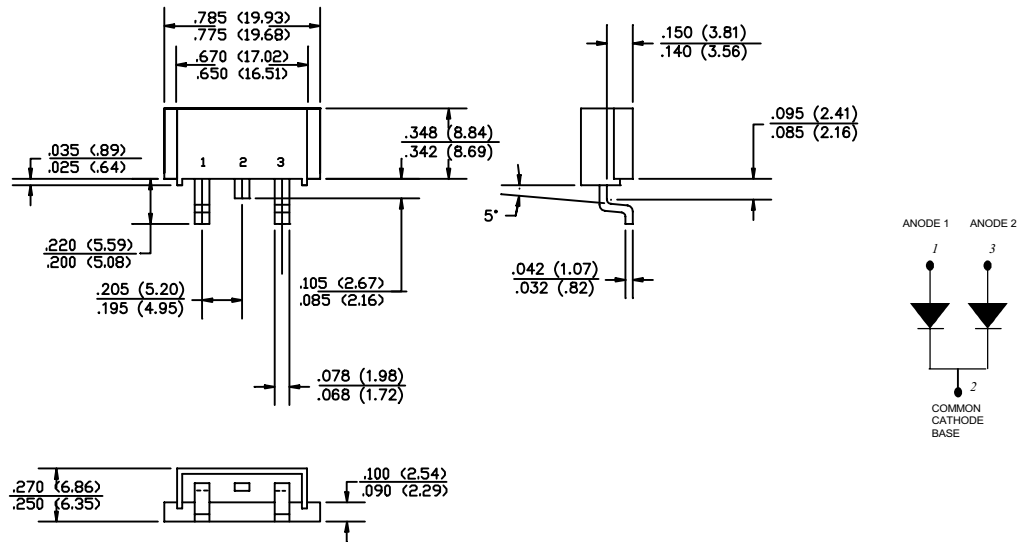
Mechanical Dimensions: In Inches / mm**D61-8 (PRM2)**



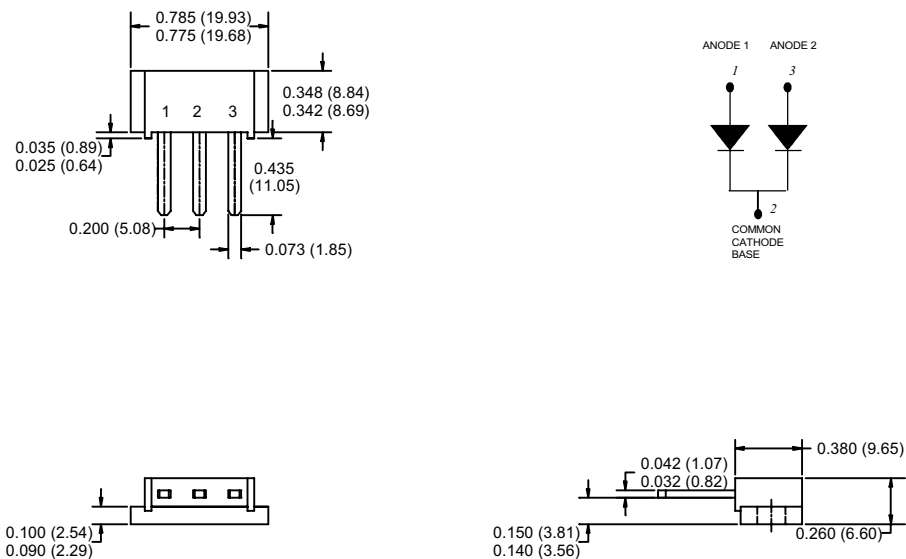
SENSITRON

SEMICONDUCTOR

84CNQ...SERIES



D61-8-SL (PRM2-SL)



D61-8-SM (PRM2-SM)

**Maximum Ratings:**

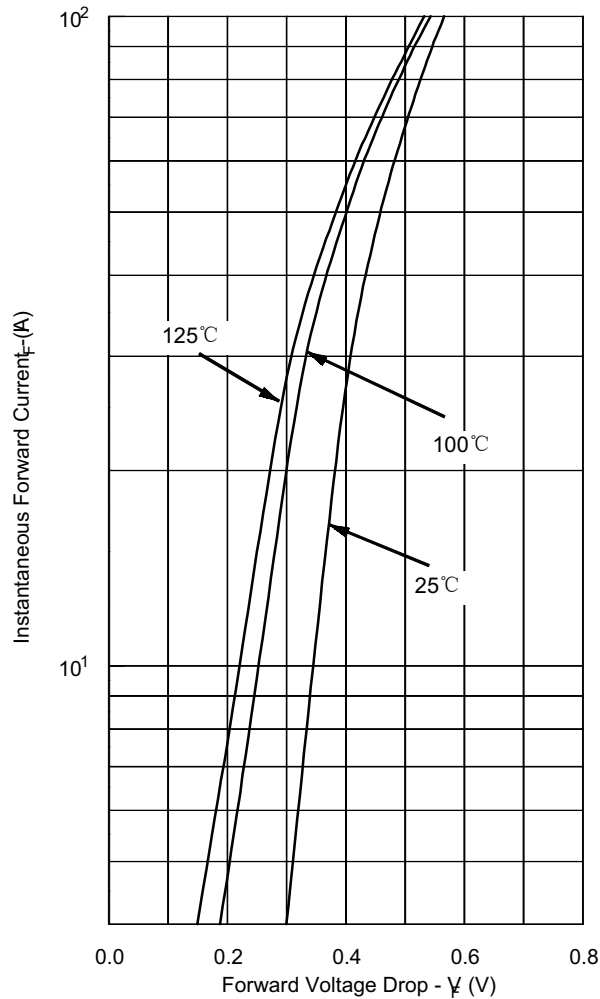
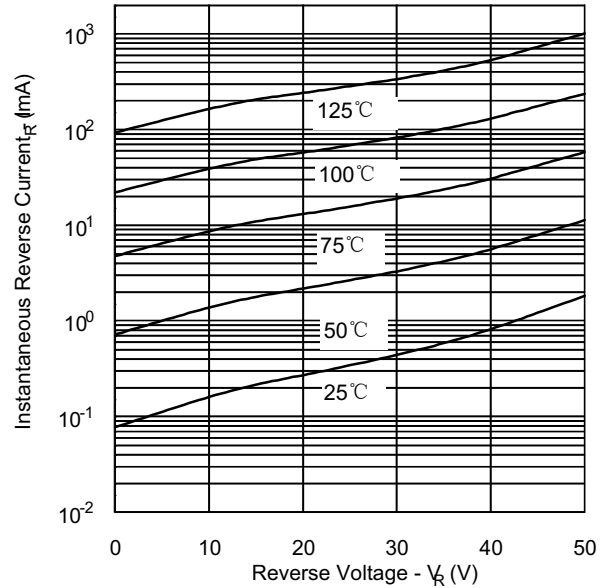
Characteristics	Symbol	Condition	Max.	Units
Peak Inverse Voltage	V_{RWM}	-	35(84CNQ035) 40(84CNQ040) 45(84CNQ045)	V
Max. Average Forward Current	$I_{F(AV)}$	50% duty cycle @ $T_C = 91^\circ\text{C}$, rectangular wave form	80	A
Max. Peak One Cycle Non-Repetitive Surge Current (per leg)	I_{FSM}	8.3 ms, half Sine pulse	750	A
Non-Repetitive Avalanche Energy (per leg)	E_{AS}	$T_J = 25^\circ\text{C}$, $I_{AS} = 8\text{A}$, $L = 1.7\text{mH}$	54	mJ
Repetitive Avalanche Current (per leg)	I_{AR}	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times$ V_R typical	8	A

Electrical Characteristics:

Characteristics	Symbol	Condition	Max.	Units
Max. Forward Voltage Drop (per leg)*	V_{F1}	@ 40A, Pulse, $T_J = 25^\circ\text{C}$ @ 80 A, Pulse, $T_J = 25^\circ\text{C}$	0.49 0.62	V
	V_{F2}	@ 40 A, Pulse, $T_J = 100^\circ\text{C}$ @ 80 A, Pulse, $T_J = 100^\circ\text{C}$	0.44 0.60	V
Max. Reverse Current (per leg)*	I_{R1}	@ V_R = rated V_R $T_J = 25^\circ\text{C}$	5	mA
	I_{R2}	@ V_R = rated V_R $T_J = 125^\circ\text{C}$	600	mA
Max. Junction Capacitance (per leg)	C_T	@ $V_R = 5\text{V}$, $T_C = 25^\circ\text{C}$ $f_{SIG} = 1\text{MHz}$	2600	pF
Typical Series Inductance (per leg)	L_S	Measured lead to lead 5 mm from package body	5.5	nH
Max. Voltage Rate of Change	dv/dt	-	10,000	V/ μs

* Pulse Width < 300 μs , Duty Cycle <2%**Thermal-Mechanical Specifications:**

Characteristics	Symbol	Condition	Specification	Units
Max. Junction Temperature	T_J	-	-55 to +125	$^\circ\text{C}$
Max. Storage Temperature	T_{stg}	-	-55 to +125	$^\circ\text{C}$
Maximum Thermal Resistance Junction to Case (per leg)	$R_{\theta JC}$	DC operation	0.85	$^\circ\text{C/W}$
Maximum Thermal Resistance Junction to Case (per package)	$R_{\theta JC}$	DC operation	0.42	$^\circ\text{C/W}$
Maximum Thermal Resistance, Case to Heat Sink (D61-8 Only)	$R_{\theta CS}$	Mounting surface, smooth and greased Device flatness < 5 mils	0.30	$^\circ\text{C/W}$
Approximate Weight	wt	-	7.8	g
Mounting Torque (D61-8 Only)	T_M	-	40 (min) 58 (max)	Kg-cm
Case Style	PRM2 PRM2-SL PRM2-SM			

**Typical Forward Characteristics****Typical Reverse Characteristics****Typical Junction Capacitance**