


ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz): 0.800-2.000
 IMPEDANCE (NOMINAL): 50 OHMS
 VSWR: INPUT: 1.20:1 TYPICAL/1.30:1 MAX
 OUTPUT: 1.10:1 TYPICAL/1.20:1 MAX
 INSERTION LOSS (dB): 0.6 TYPICAL/0.8 MAX
 AMPLITUDE BALANCE (MAX): 0.2 dB
 ISOLATION (dB): 27 TYPICAL/22 MIN
 PHASE BALANCE (MAX): 4 DEGREES
 RF POWER (TOTAL MAX): 20 WATTS INPUT WITH LOAD
 VSWR 1.2:1 OR BETTER

MECHANICAL SPECIFICATIONS

CONNECTORS: N-FEMALE, BRASS, NICKEL PLATE
 CONNECTOR PINS: BERYLLIUM COPPER, GOLD PLATE
 HOUSING: ALUMINUM, YELLOW IRIDITE
 INSULATORS: TEFLON[®], VIRGIN ELECTRICAL GRADE
 TEMPERATURE: -55°C TO +70°C

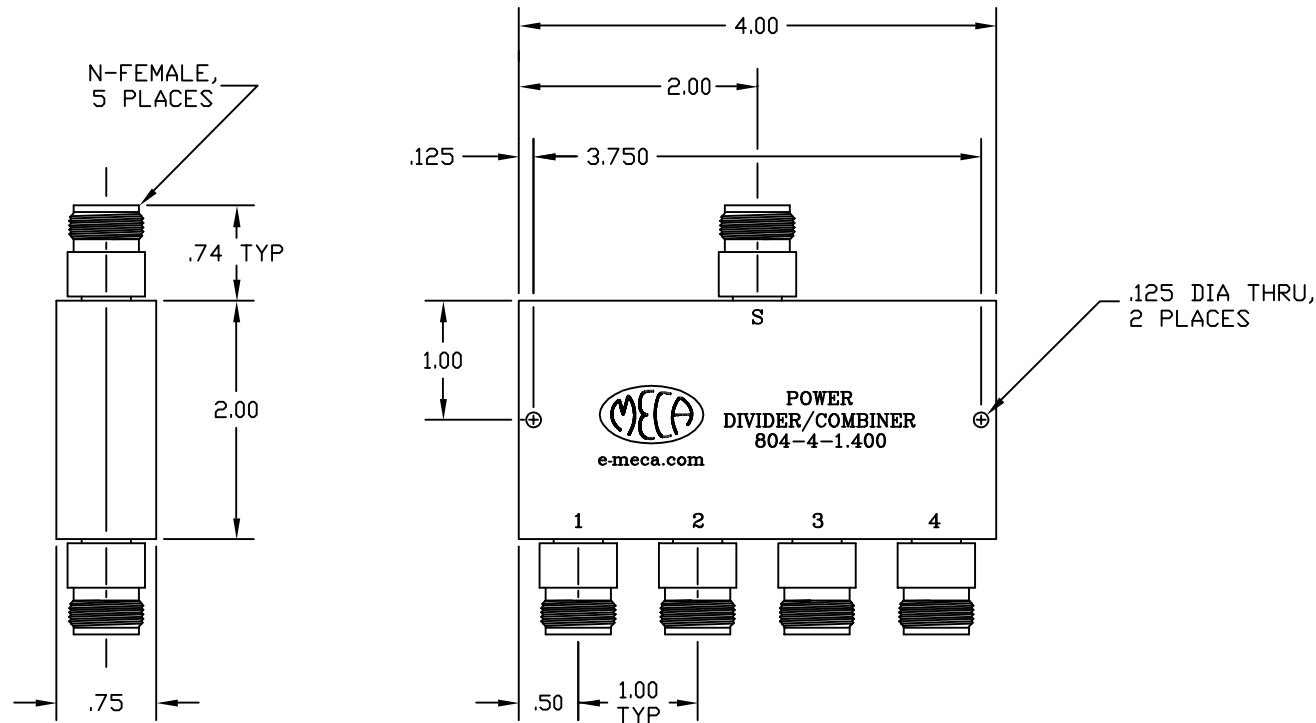

A	REDRAWN	10/05/00	MJD	MATERIAL: SEE ABOVE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES		 ELECTRONICS, INC. DENVER, NEW JERSEY e-meca.com	
				FINISH: SEE ABOVE		TOLERANCES 2 PLACES: ± .02 3 PLACES: ± .010 ANGLES: ± ---			
				DRAWN: LB	DATE: 10/05/00	TIR:		TITLE 4-WAY, IN-PHASE (0 DEGREE), POWER DIVIDER/COMBINER, N-FEMALE	
				APPROVED: MJD	DATE: 10/05/00	SCALE: NTS	SIZE		
LTR	DESCRIPTION	DATE	APP			SHEET:	A	CODE IDENT. NO. 22424	DRAWING NO. 804-4-1.400