



SUHNER®


CELLULAR BASE STATION VSWR MONITOR COUPLERS

Type No. 9085.AA.AAAA

A new addition to the SUHNER® range.

Features

- PCS/PCN variants available
- High coupler directivity
- Low passive and active intermodulation levels typically < - 160 dBc compared to 2 carriers at + 44 dBm.

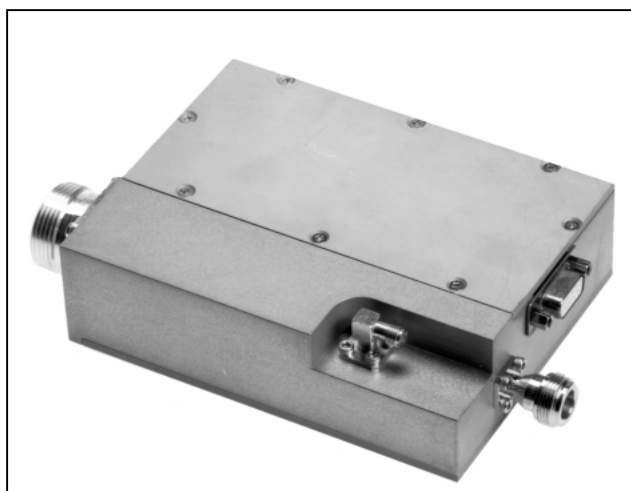

Technical Data

Electrical properties	
Frequency	1700 to 2300 MHz
Bandwidth	200 MHz
Return loss	> 20 dB
Insertion loss	< 0.1 dB
Alarm o/p levels	According to application
Connectors	7/16 antenna port N-Rx Port SMA port suiffer
Mechanical properties	
Material	Aluminium, silver plated and treated

Data Sheet 01.99/Edition 2, 193DIF/kle

Waiver!

While the information contained in this folder has been carefully compiled to the best of our present knowledge, it is not intended as representation or warranty of any kind on our part regarding the fitness of the products concerned for any particular use of purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The fitness of each product for any particular purpose must be checked beforehand with our specialists.

**HUBER+SUHNER**

HUBER+SUHNER AG
Wireless Division
CH-9100 Herisau
Phone +41(0)71 353 41 11
Fax +41(0)71 353 47 51
Internet www.hubersuhner.com