

MINIMUM LOSS PADS

BNC (50 Ω) / BNC (75 Ω)

DC - 1 GHz

5.7 dB



MODELS: 9033-50/75 & 9033-75/50

SPECIFICATIONS:

Electrical:


Frequency Range	DC - 1 GHz
Attenuation	5.7 ±0.5 dB
VSWR	1.20:1 Max.
Input Power	1 Watt Avg @ +25°C
	Derated Linearly to 0.25 Watts @ +85°C
Peak Power	250 Watts Max.
	(5uSec Pulse, .05% Duty Cycle)
Operating Temperature Range	-20°C to +85°C

Mechanical:

BNC Connectors	Nickel Plated Brass
Center Contacts	Gold Plated Beryllium Copper

Model Number: 9033-50/75
BNC Male 75 Ohm / BNC Female 50 Ohm

Model Number: 9033-75/50
BNC Male 50 Ohm / BNC Female 75 Ohm

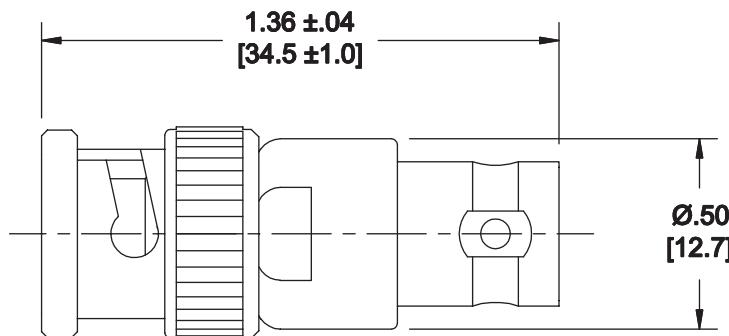

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Units which operate over a more specific band, as well as units which feature extended frequency performance and/or very low return loss (VSWR) over a specific band are also available.

9033-50_75; REV D