



ADSL-Transformer

WSL-A22.303

Specifications



Schematics & Mechanicals (mm)

BLACK DOT
IS PIN NO.1**Application**
Generic**EP Core Design**EP 13 shown
For smaller sizes down to EP 7,
contact WICKMANN**Features**Optimized magnetic shielding for low
interference
High performance, high quality design
Surface Mount and Through Hole package**WebLinks****Data Sheet**www.wickmann.com/products/WSL_A22303.pdf**Packaging**www.wickmann.com/pack**Packaging**100 pcs./tray
7 trays/carton**Mounting**Through-Hole
For Surface Mount version,
contact WICKMANN**Solderability**

270 - 300°C

Isolation voltage



1650 VAC

Operation Temperature Range

-40°C to +85°C

Marking Model No.**Unit Weight**

7g

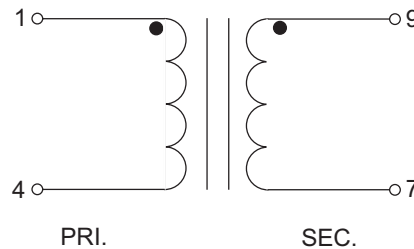

DC Resistance:

9,3 Ω (1-4) max. $\pm 10\%$

Open Circuit Inductance:

11,5 Ω (9-7) max. $\pm 10\%$ 5,5mH (1-4) $\pm 5\%$ @ 10kHz, 100mVAC5,5mH (9-7) $\pm 5\%$ @ 10kHz, 100mVAC

Total Harmonic Distortion (THD):

-

**Order
Information**

Qty.	Order Number
	960 4 622303 9