



ADSL-Transformer

WSL-A12.372 / WSL-A12.373 Specifications

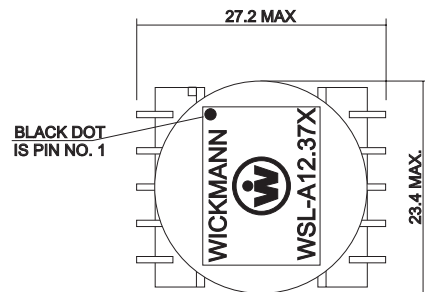

Schematics & Mechanicals (mm)



Application

ADSL Central Office, CO
Generic Coupling Transformer

Features

Optimized magnetic shielding for low interference
High performance, high quality design
Surface Mount and Through Hole package

WebLinks

Data Sheet

www.wickmann.com/products/WSL_A12372.pdf
www.wickmann.com/products/WSL_A12373.pdf

Packaging

www.wickmann.com/pack

Packaging

100 pcs./tray
7 trays/carton

Mounting

Through-Hole
For Surface Mount version,
contact WICKMANN

Solderability

270 - 300°C

Isolation voltage

1500 VAC

Operation Temperature Range



-40°C to +85°C

Marking

 Model No.

Unit Weight

11g

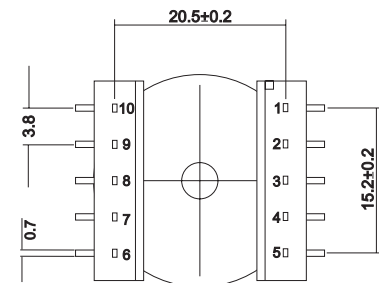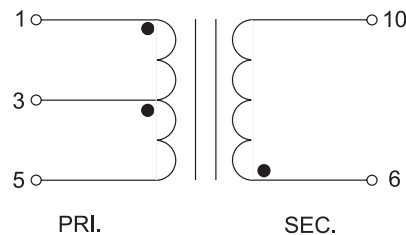

DC Resistance:
Open Circuit Inductance:

WSL-A12.372

3,0 Ω (1-5) max. ±10%
4,0mH ±10% @ 1kHz, 1,0 V, 100mA

WSL-A12.373

5,0 Ω (1-5) max. ±10%
10,0mH ±10% @ 1kHz, 1,0 V, 100mA

Order Information

Qty.	Order Number
	960 4 612372 9
	960 4 612373 9