

9-000192

32:1 Combiner


FREQUENCY
BAND: PCS

SPECIFICATIONS

Frequency Range:	1930–1990 MHz
Input Power:	+33 dBm max. per input channel, continuous
Input Channels:	1–32
Insertion Loss:	29.5 dB max.
Isolation:	40 dB min. input port-to-port
Amplitude Balance:	± 0.5 dB max.
Input VSWR:	1.5 : 1 max.
Output VSWR:	1.5 : 1 max.
Sampled Port:	-20 dBc nominal relative to common port output
Connectors:	SMA female, all on front panel
Size:	1 RU, 5.25" max depth
Note: All Specifications apply in a 50 Ohm system at specified levels at 25° C.	

MAXIMUM RATINGS

Input Power per Port:	+33 dBm max.
Temperature Range:	0° C to 40° C

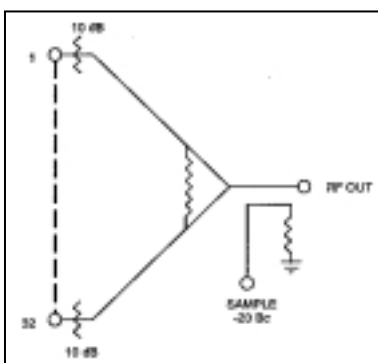

Spectrian Corporation
350 West Java Drive
Sunnyvale, California 94089
Tel: 408-745-5400
Fax: 408-541-0263
www.spectrian.com
DS-50 06/02

Spectrian Asia Pacific
4th Floor, Ensung Building
601-18, Yoksam-Dong, Kangnam-Ku
Seoul, 135-080
KOREA
Tel: + 82-2-545-6441
Fax: + 82-2-545-6062

Spectrian do Brasil
Av. Roque Petroni Jr., 999
12° Andar
04707-910 Sao Paulo
SP BRASIL
Tel: + 55-11-5185-8710
Fax: + 55-11-5185-2899