



BYV95AP THRU BYV96EP


1.5A FAST RECOVERY PLASTIC RECTIFIER

FEATURES

- FAST RECOVERY TIMES
- UL 94VO FLAME RETARDANT EPOXY MOLDING COMPOUND
- LOW COST
- HIGH SURGE CURRENT CAPABILITY
- DIFFUSED JUNCTION

MECHANICAL DATA

- CASE : TRANSFER MOLDED
- TERMINAL : SOLDERABLE PER MIL-STD-202,METHOD 208
- POLARITY : CATHODE INDICATED BY COLOR BAND
- WEIGHT : 0.4 GRAMS

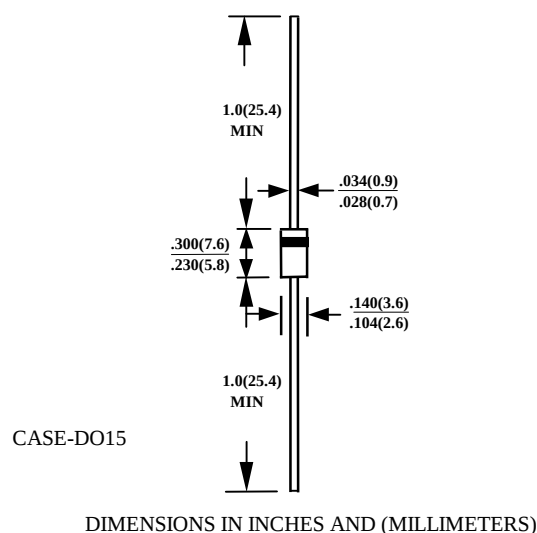

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED
SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD.
FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	BYV95AP	BYV95BP	BYV95CP	BYV96DP	BYV96EP	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	200	400	600	800	1000	V
MAXIMUM RMS VOLTAGE	V_{RMS}	140	280	420	560	700	V
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	200	400	600	800	1000	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT .375" (9.5mm) LEAD LENGTH AT $T_A=55^{\circ}C$	I_O	1.5					A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	60					A
TYPICAL JUNCTION CAPACITANCE (NOTE 1)	C_J	10					PF
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta ja}$	40					$^{\circ}C/W$
STORAGE TEMPERATURE RANGE	T_{STG}	- 55 TO + 150					$^{\circ}C$
OPERATING TEMPERATURE RANGE	T_{OP}	- 55 TO + 150					$^{\circ}C$

ELECTRICAL CHARACTERISTICS ($A_T T_A = 25^{\circ}C$ UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	BYV95AP	BYV95BP	BYV95CP	BYV96CP	BYV96EP	UNITS
MAXIMUM FORWARD VOLTAGE AT 3A DC	V_F	1.6					V
MAXIMUM REVERSE CURRENT AT 25°C	I_R	5					μA
MAXIMUM REVERSE CURRENT AT 100°C	I_R	50					μA
MAXIMUM REVERSE RECOVERY TIME (NOTE 3)	T_{RR}	150		250	300		nS

NOTE :

1. MEASURED AT 1 MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS
2. BOTH LEADS ATTACHED TO HEATSINK 20x 20x 1t(mm) COPPER PLATE AT LEAD LENGTH 5mm
3. REVERSE RECOVERY TEST CONDITIONS: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$

RATINGS AND CHARACTERISTIC CURVE BYV95AP THRU BYV96EP

FIG. 1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

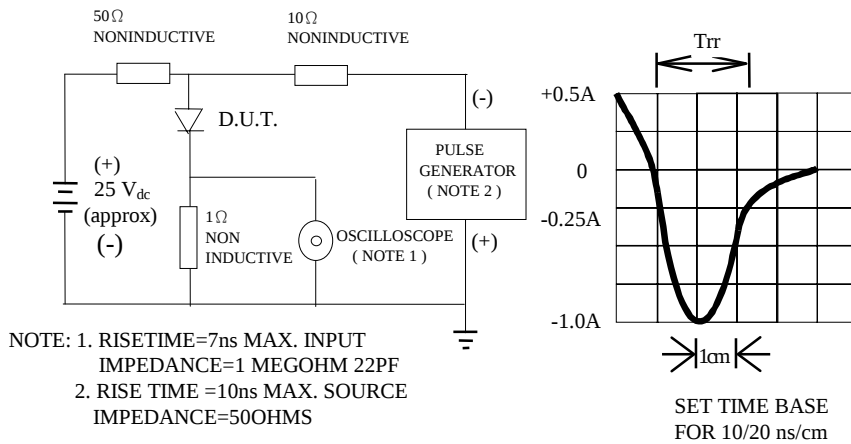


Fig. 2-MAXIMUM CURRENT DERATING CURVE

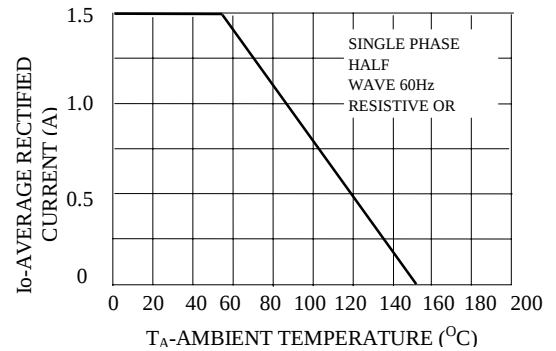


FIG. 3-TYPICAL REVERSE CHARACTERISTICS

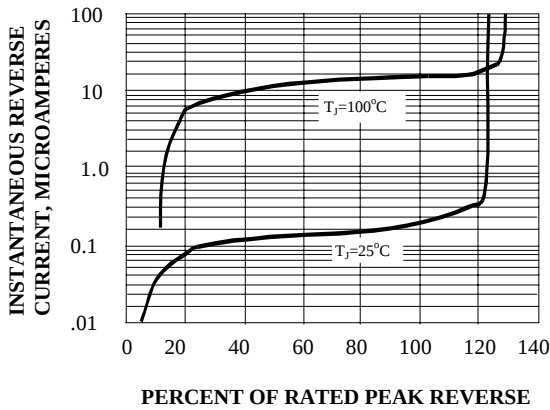


Fig. 4-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

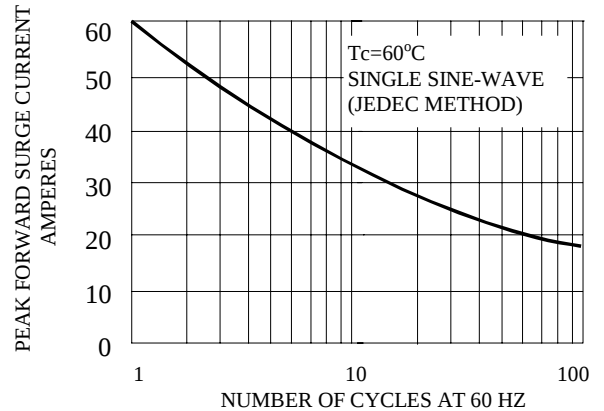


FIG. 5-TYPICAL JUNCTION CAPACITANCE

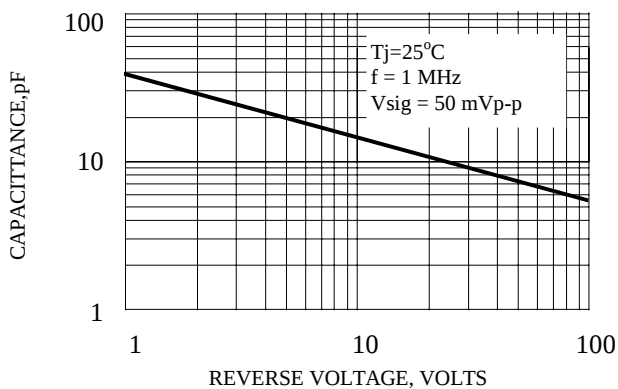


FIG. 6-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

