


35 AMP BUTTON DIODES


FEATURES

- **PROPRIETARY SOFT GLASS[®] JUNCTION PASSIVATION FOR SUPERIOR RELIABILITY AND PERFORMANCE**
- **VOID FREE VACUUM DIE SOLDERING FOR MAXIMUM MECHANICAL STRENGTH AND HEAT DISSIPATION (Solder Voids: Typical < 2%, Max. < 10% of Die Area)**
- Compact molded design
- High surge current, 600 A @ $T_J = 175^\circ\text{C}$
- Low cost
- Peak performance at elevated temperatures: 35 A @ $T_J = 175^\circ\text{C}$

MECHANICAL SPECIFICATION



Die Size:
0.165" x 0.165"
Square

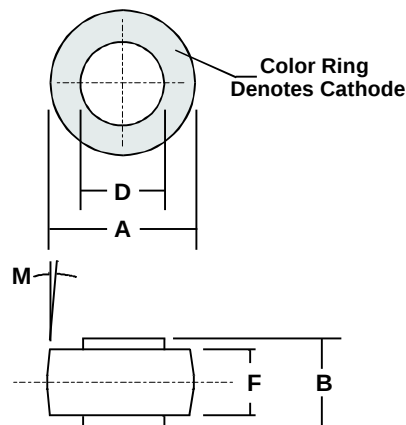

MECHANICAL DATA

- Case: Transfer molded plastic
- Finish: All external surfaces are corrosion resistant and the contact areas are readily solderable
- Soldering Temperature: 250 °C maximum
- Mounting Position: Any
- Polarity: Color band denotes cathode
- Weight: 0.6 Ounces (1.8 Grams)

SOFT GLASS[®] DIODE

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.78	10.29	0.385	0.405
B	5.97	6.35	0.235	0.250
D	5.46	5.71	0.215	0.225
F	4.19	4.45	0.165	0.175
M	5° NOM		5° NOM	

MAXIMUM RATINGS & ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

PARAMETER (TEST CONDITIONS)	SYMBOL	RATINGS								UNITS
Series Number		BAR 3500	BAR 3501	BAR 3502	BAR 3504	BAR 3506	BAR 3508	BAR 3510		
Maximum DC Blocking Voltage	VRRM	50	100	200	400	600	800	1000	VOLTS	
Maximum RMS Voltage	VRWM									
Maximum Peak Recurrent Reverse Voltage	VDC									
Non-repetitive Peak Reverse Voltage (Half wave, single phase, 60 Hz peak)	VRSM	60	120	240	480	720	960	1200		
Average Forward Rectified Current @ Tc =150 °C	Io	35								AMPS
Peak Forward Surge Current (8.3mS single half sine wave superimposed on rated load)	IFSM	600								
Repetitive Peak Reverse Surge Current (Half wave, single phase, 60 Hz applied to rated load)	IRSM	110								
Maximum Forward Voltage Drop at 35 Amp DC	VFM	1.1 (Typical 0.95)						1.2		VOLTS
Maximum Average DC Reverse Current @ TA = 25 °C At Rated DC Blocking Voltage @ TA = 100 °C	IRM	1 50								μA
Maximum Thermal Resistance, Junction to Case (Note 1)	RθJC	0.9								°C/W
Junction Operating and Storage Temperature Range	TJ ,TSTG	-65 to +175								°C

Notes: 1) Single Side Cooled

4.97Rev035