

Part Number	C. M. Attenuation			Isolation Voltage (V _{rms})	Mounting
	(dB TYP @ 500 KHz)	(dB TYP @ 1 MHz)	(dB TYP @ 10 MHz)		
B4001	45	49	35	1500	THT
B4003	45	49	35	1500	SMT
BX4053	45	49	35	1500	SMT


Mechanicals

Pulse
BX4053
 Date Code
 Country of Origin

SUGGESTED PAD LAYOUT

Weight 2.1 grams
Tape & Reel 400/reel
Tube 50/tube

Schematics

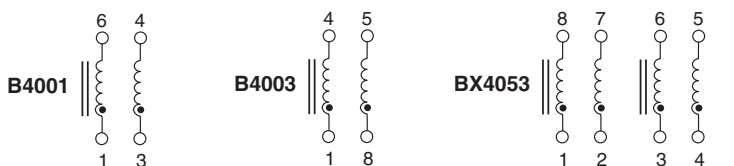

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	HONG KONG (Great China)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 U.S.A. http://www.pulseeng.com TEL: 619 674 8100 FAX: 619 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 287 8998 FAX: 65 280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	19/F, China United Plaza 1008 Tai Nan West Street Cheung Sha Wan, Kowloon Hong Kong, China TEL: 852 2788 6588 FAX: 852 2776 1055	

B912.C (10/01)