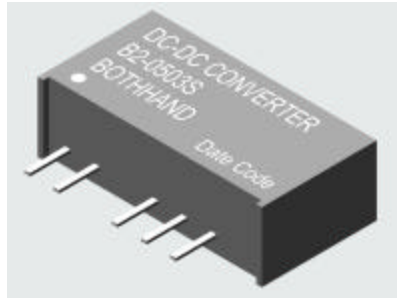


1. Features :

■ 7 Pin SIL Package	
■ Low Ripple and Noise	
■ Input / Output Isolation 1K Vdc or 3K Vdc	
■ 100 % Burn-In	
■ Input Filter with Internal Capacitor	
■ Custom Design Available	

2. Absolute maximum ratings:(Exceeding these values may damage the module. [These are not continuous operating ratings](#))

Parameter	Condition	Min.	Typ.	Max.	Unit
Input Absolute Voltage Range	5V Input Model	-0.7	5	7.5	Vdc
	12V Input Model	-0.7	12	15	
	24V Input Model	-0.7	24	30	
Max. Output power		---	---	1	W
Output Short circuit duration		---	---	1.0	Second
Operating temperature	Output Full Load	-40	---	+85	Deg
Storage temperature		-55	---	+125	

3. Nominal Input / Output Electrical Specifications :

(Specifications typical at Ta = +25°C, nominal input voltage, rated output current unless otherwise noted)

Parameter	Condition	Min.	Typ.	Max.	Unit
Input Voltage Range	5V Input Model	4.5	5	5.5	Vdc
	12V Input Model	10.8	12	13.2	
	24V Input Model	21.6	24	26.4	
Output Voltage Accuracy	Nominal Input	---	---	± 1.0	%
Output Voltage Balance	Dual Output same Load	---	---	± 0.3	
Switching Frequency	Nominal Input	---	45	---	KHz
Temperature Coefficient		---	± 0.01	± 0.02	% / °
Isolation Voltage	Standard Series	1000	---	---	Vdc
	High Isolation Series	3000	---	---	
Isolation Resistance	500 Vdc	1000	---	---	M?
Isolation Capacitance	1 KHz / 250 mV rms	---	80	---	pF
Line Regulation		---	---	± 0.4	%


4. Model Selection Guide:**4.1. 1K Vdc Isolation – Dual split output**

(Specifications typical at Ta = +25 °C, Nominal input voltage, Rated output current unless otherwise noted)

Bothhand Model No.	Input Voltage (Vdc)	Output Voltage (Vdc)		Output Current (mA) Max.		Input Current @ No Load (mA) Typ.	Input Current @ Max. Load (mA) Typ.	Output Ripple (mV) Max.	Load Regulation (%) Max.	Efficiency (%) Typ.
B2-0503S	5	3.0	3.0	100	100	20	196	45	± 0.3	61
B2-053R3S		3.3	3.3	100	100	21	212	45	± 0.3	62
B2-054R8S		4.85	4.85	100	100	21	300	45	± 0.3	64
B2-0505S		5.0	5.0	100	100	22	313	45	± 0.3	64
B2-1203S	12	3.0	3.0	100	100	18	81	45	± 0.3	62
B2-123R3S		3.3	3.3	100	100	18	88	45	± 0.3	62
B2-124R8S		4.85	4.85	100	100	16	123	45	± 0.3	65
B2-1205S		5.0	5.0	100	100	15	128	45	± 0.3	65
B2-2403S	24	3.0	3.0	100	100	16	40	45	± 0.3	62
B2-243R3S		3.3	3.3	100	100	16	44	45	± 0.3	62
B2-244R8S		4.85	4.85	100	100	15	62	45	± 0.3	65
B2-2405S		5.0	5.0	100	100	14	64	45	± 0.3	65
B2-xxxxS										

Notes :

1. B2-xxxxS is for Customer Design.
2. Load regulation is for output current change from 0 % to 100 % Max. Load.

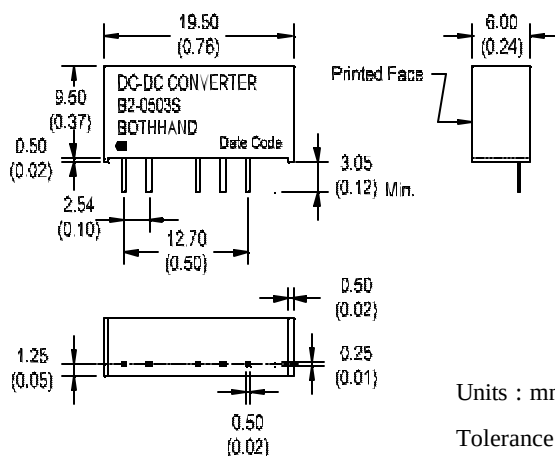Mechanical Dimension:

Units : mm (inch)

Tolerance : .xx ± 0.25

(± 0.01)

Pin	1K Vdc - Dual Split
1	+Vin
2	-Vin
3	---
4	Vo2 (+)
5	Ground
6	Vo1 (+)
7	---

Note: " --- " means Omitted

4.2. 3K Vdc Isolation - Dual split output


(Specifications typical at Ta = +25 °C, Nominal input voltage, Rated output current unless otherwise noted)

Bothhand Model No.	Input Voltage (Vdc)	Output Voltage (Vdc)		Output Current (mA) Max.		Input Current @ No Load (mA) Typ.	Input Current @ Max. Load (mA) Typ.	Output Ripple (mV) Max.	Load Regulation (%) Max.	Efficiency (%) Typ.
B2-0503SH	5	3.3	3.3	100	100	20	196	45	± 0.3	61
B2-053R3SH		3.3	3.3	100	100	21	212	45	± 0.3	62
B2-054R8SH		4.85	4.85	100	100	21	300	45	± 0.3	64
B2-0505SH		5.0	5.0	100	100	22	313	45	± 0.3	64
B2-1203SH	12	3.0	3.0	100	100	18	81	45	± 0.3	62
B2-123R3SH		3.3	3.3	100	100	18	88	45	± 0.3	62
B2-124R8SH		4.85	4.85	100	100	16	123	45	± 0.3	65
B2-1205SH		5.0	5.0	100	100	15	128	45	± 0.3	65
B2-2403SH	24	3.0	3.0	100	100	16	40	45	± 0.3	62
B2-243R3SH		3.3	3.3	100	100	16	44	45	± 0.3	62
B2-244R8SH		4.85	4.85	100	100	15	62	45	± 0.3	65
B2-2405SH		5.0	5.0	100	100	14	64	45	± 0.3	65
B2-xxxxSH										

Notes :

1. B2-xxxxSH is for Customer Design.
2. Load regulation is for output current change from 0 % to 100 % Max. Load.

Mechanical Dimension:

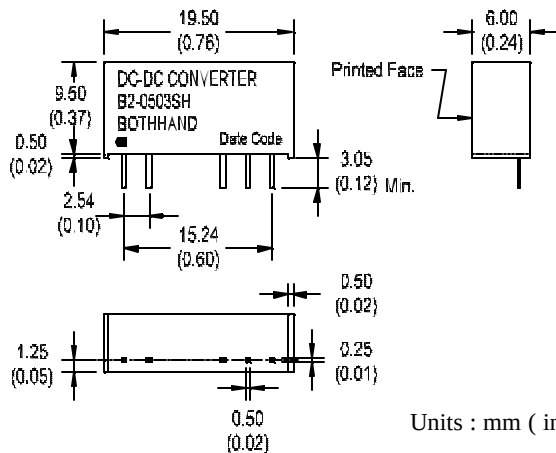

Units : mm (inch)
Tolerance : .xx ± 0.25
(± 0.01)

Pin	3K Vdc - Dual Split
1	+Vin
2	-Vin
3	---
4	
5	Vo2 (+)
6	Ground
7	Vo1 (+)

Note: " --- " means Omitted